MOTOROLA

DL151/D
REV 2

Rectifier

Device Data

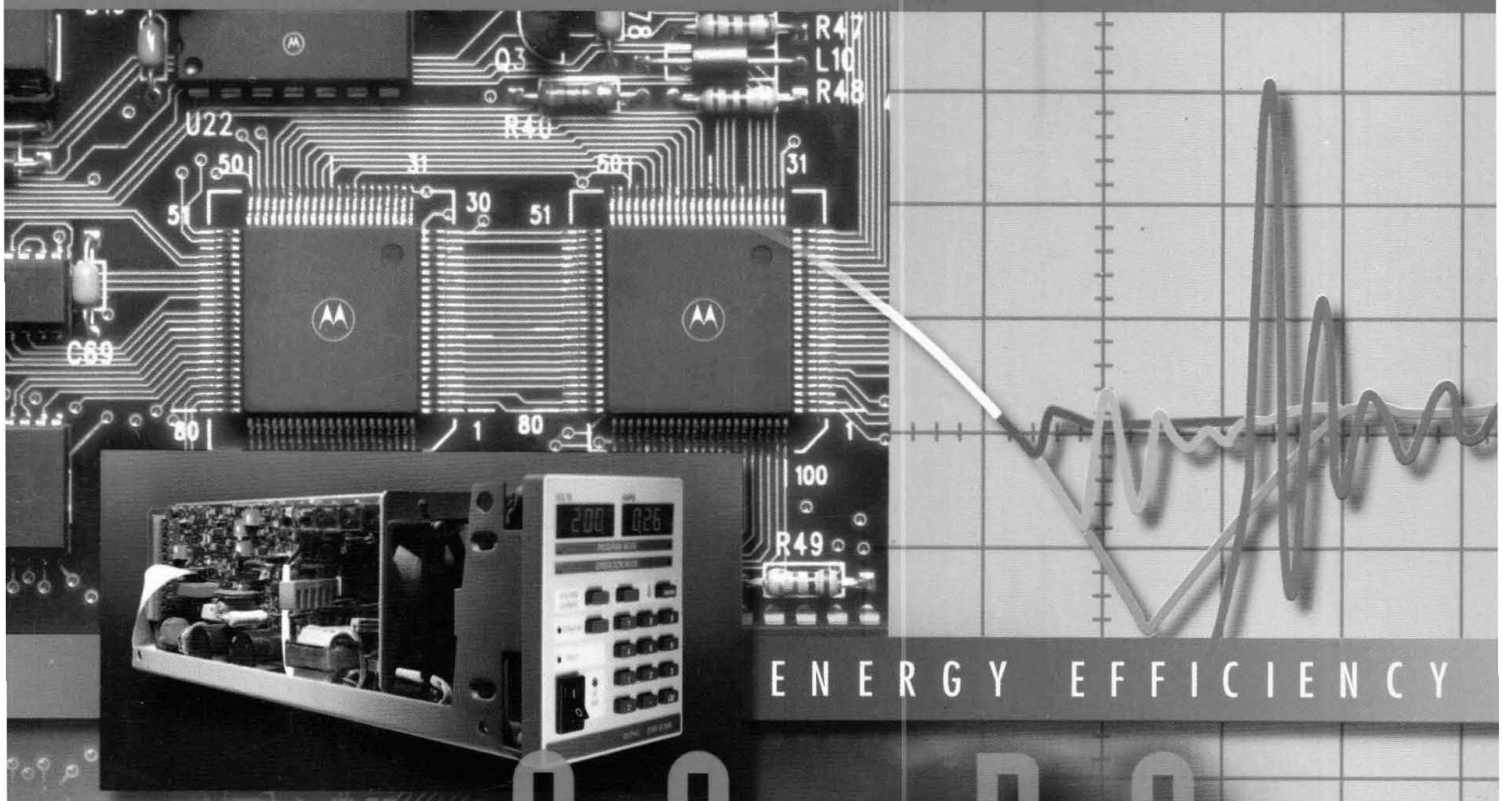

ENERGY EFFICIENCY

AC-DC

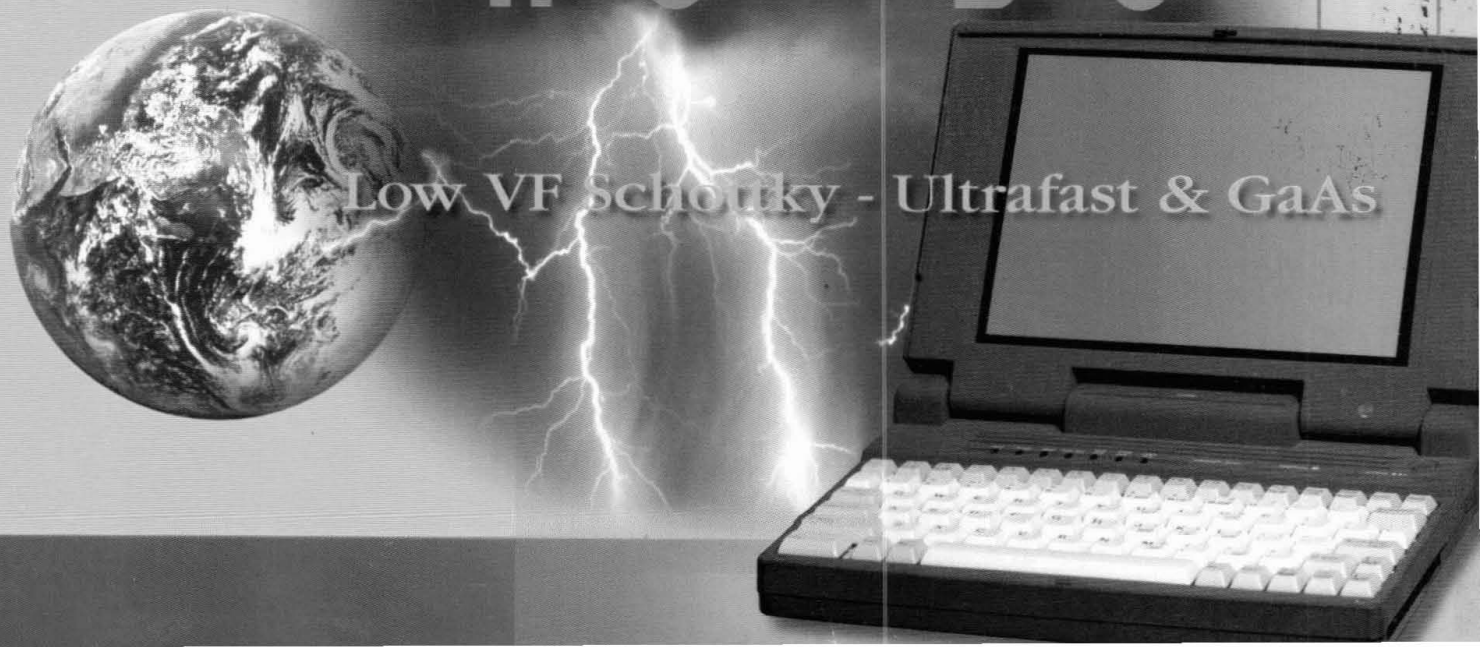

Low VF Schottky - Ultrafast & GaAs

Index and Cross Reference

Selector Guide

Schottky Data Sheets

Ultrafast Data Sheets

Standard and Fast Recovery Data Sheets

Tape and Reel/ Packaging Specifications

Surface Mount Information

TO–220 Leadform Options

Package Outline Dimensions and Footprints

AR598: Avalanche Capability of Today's Power Semiconductors

MOTOROLA

Rectifier Device Data

This book presents technical data for Motorola's broad line of rectifiers. Complete specifications are provided in the form of data sheets and accompanying selection guides provide a quick comparison of characteristics to simplify the task of choosing the best device for a circuit.

The information in this book has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

© Motorola, Inc. 1995
Previous Edition © 1993
"All Rights Reserved"

Printed in U.S.A.

DATA CLASSIFICATION

PRODUCT PREVIEW

Data sheets herein contain information on a product under development. Motorola reserves the right to change or discontinue these products without notice.

ADVANCED INFORMATION

Data sheets herein contain information on new products. Specifications and information are subject to change without notice.

FORMAL

For a fully characterized device there must be devices in the warehouse and price authorization.

DESIGNER'S

The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

MOTOROLA DEVICE CLASSIFICATIONS

In an effort to provide up-to-date information to the customer regarding the status of any given device, Motorola has classified all devices into three categories: "Preferred" products, "Current" products and "Not Recommended for New Design" products.

PREFERRED PRODUCTS

A Preferred Type is a device which is recommended as a first choice for future use. These devices are "preferred" by virtue of their performance, price, functionality, or combination of attributes which offer the overall "best" value to the customer. This category contains both advanced and mature devices which will remain available for the foreseeable future.

"Preferred Devices" are identified in the Selector Guide Section and the Data Sheet Sections.

CURRENT PRODUCTS

Device types identified as "current" may not be a first choice for **new** designs, but will continue to be available because of the popularity and/or standardization or volume usage in current production designs. These products can be acceptable for new designs but the preferred types are considered better alternatives for long term usage.

Any device that has not been identified as a "preferred device" is a "current" device.

NOT RECOMMENDED FOR NEW DESIGN PRODUCTS

Products designated as "Not Recommended for New Design" have become obsolete as dictated by poor market acceptance, or a technology or package that is reaching the end of its life cycle. Devices in this category have an uncertain future and do not represent a good selection for new device designs or long term usage.

The RF Device Data book does not contain any "Not Recommended for New Design" devices.

Designer's, MEGAHERTZ, POWERTAP, SCANSWITCH, SWITCHMODE and Surmetic are trademarks of Motorola Inc.
Thermal Clad is a trademark of the Bergquist Company.

Section 1

Index and Cross Reference

Index and Cross Reference

The following table represents an index and cross reference guide for all rectifier devices which are either manufactured directly by Motorola or for which Motorola manufactures a suitable equivalent. Where the Motorola part number differs from the industry part number, the Motorola device is a form, fit and function replacement for the industry type number — however, subtle differences in characteristics and/or specifications may exist. The part numbers listed in this Cross Reference are in computer sort.

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
10CTF10		MUR840	4–56
10CTF20		MUR840	4–56
10CTF30		MUR840	4–56
10CTF40		MUR840	4–56
10DL1		1N4934	5–3
10DL2		1N4935	5–3
10TQ030		MBR1045	3–86
10TQ035		MBR1045	3–86
10TQ040		MBR1045	3–86
10TQ045		MBR1045	3–86
11DQ03		1N5818	3–38
11DQ04		1N5819	3–38
11DQ05		MBR160	3–43
11DQ06		MBR160	3–43
11DQ09		MBR1100	3–46
11DQ10		MBR1100	3–46
12CTQ030	MBR1545CT		3–64
12CTQ035	MBR1545CT		3–64
12CTQ040	MBR1545CT		3–64
12CTQ045	MBR1545CT		3–64
15CTO035		MBR1545CT	3–64
15CTQ045		MBR1545CT	3–64
1N2069,A	1N4003		5–2
1N2070,A	1N4004		5–2
1N2071,A	1N4005		5–2
1N3611		1N4003	5–2
1N3611GP		1N4003	5–2
1N3612		1N4004	5–2
1N3612GP		1N4004	5–2
1N3613		1N4005	5–2
1N3613GP		1N4005	5–2
1N3614		1N4006	5–2
1N3614GP		1N4006	5–2
1N3957		1N4007	5–2
1N3957GP		1N4007	5–2
1N4001	1N4001		5–2
1N4001GP		1N4001	5–2
1N4002	1N4002		5–2
1N4002GP		1N4002	5–2
1N4003	1N4003		5–2
1N4003GP		1N4003	5–2
1N4004	1N4004		5–2
1N4004GP		1N4004	5–2
1N4005	1N4005		5–2
1N4005GP		1N4005	5–2
1N4006	1N4006		5–2
1N4006GP		1N4006	5–2
1N4007	1N4007		5–2
1N4007GP		1N4007	5–2
1N4245		1N4003	5–2
1N4245GP		1N4003	5–2
1N4246		1N4004	5–2
1N4246GP		1N4004	5–2
1N4247		1N4005	5–2
1N4247GP		1N4005	5–2
1N4248		1N4006	5–2
1N4248GP		1N4006	5–2
1N4249		1N4007	5–2
1N4249GP		1N4007	5–2
1N4933	1N4933		5–3
1N4933GP		1N4933	5–3
1N4934	1N4934		5–3
1N4934GP		1N4934	5–3
1N4935	1N4935		5–3
1N4935GP		1N4935	5–3
1N4936	1N4936		5–3
1N4936GP		1N4936	5–3
1N4937	1N4937		5–3
1N4937GP		1N4937	5–3
1N4942		1N4935	5–3
1N4942GP		1N4935	5–3
1N4943		1N4936	5–3
1N4944		1N4936	5–3
1N4944GP		1N4936	5–3
1N4945		1N4937	5–3
1N4946		1N4937	5–3
1N4946GP		1N4937	5–3
1N5185		MR852	5–6
1N5185GP		MR852	5–6
1N5186		MR852	5–6
1N5186GP		MR852	5–6
1N5187		MR852	5–6
1N5187GP		MR852	5–6
1N5188		MR856	5–6
1N5188GP		MR856	5–6
1N5189		MR856	5–6
1N5189GP		MR856	5–6
1N5190		MR856	5–6
1N5190GP		MR856	5–6
1N5400	1N5400		5–5
1N5401	1N5401		5–5
1N5402	1N5402		5–5
1N5403		1N5404	5–5
1N5404	1N5404		5–5
1N5405		1N5406	5–5
1N5406	1N5406		5–5
1N5415		MR852	5–6
1N5416		MR852	5–6
1N5417		MR852	5–6
1N5418		MR856	5–6

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
1N5419		MR856	5–6
1N5420		MR856	5–6
1N5614		1N4003	5–2
1N5615		1N4935	5–3
1N5615GP		1N4935	5–3
1N5616		1N4004	5–2
1N5617		1N4936	5–3
1N5617GP		1N4936	5–3
1N5618		1N4005	5–2
1N5619		1N4937	5–3
1N5619GP		1N4937	5–3
1N5620		1N4006	5–2
1N5802		MUR420	4–31
1N5803		MUR420	4–31
1N5804		MUR420	4–31
1N5805		MUR420	4–31
1N5806		MUR420	4–31
1N5807		MUR420	4–31
1N5808		MUR420	4–31
1N5809		MUR420	4–31
1N5810		MUR420	4–31
1N5811		MUR420	4–31
1N5817	1N5817		3–38
1N5818	1N5818		3–38
1N5819	1N5819		3–38
1N5820	1N5820		3–49
1N5821	1N5821		3–49
1N5822	1N5822		3–49
1N5823	1N5823		3–60
1N5824	1N5824		3–60
1N5825	1N5825		3–60
1N5826	1N5826		3–135
1N5827	1N5827		3–135
1N5828	1N5828		3–135
1N5829	1N5829		3–139
1N5830	1N5830		3–139
1N5831	1N5831		3–139
1N5832	1N5832		3–152
1N5833	1N5833		3–152
1N5834	1N5834		3–152
1N6095	1N6095		3–144
1N6096	1N6096		3–144
1N6097	1N6097		3–156
1N6098	1N6098		3–156
1N6391	MBR3545		3–148
1N6392		MBR6545	3–168
200CNQ020	MBRP30045CT		3–183
200CNQ030	MBRP30045CT		3–183
200CNQ035	MBRP30045CT		3–183
200CNQ040	MBRP30045CT		3–183
200CNQ045	MBRP30045CT		3–183
201CNQ020	MBRP20045CT		3–182
201CNQ030	MBRP20045CT		3–182
201CNQ035	MBRP20045CT		3–182
201CNQ040	MBRP20045CT		3–182
201CNQ045	MBRP20045CT		3–182
20CTQ030		MBR2045CT	3–69
20CTQ035		MBR2045CT	3–69
20CTQ040		MBR2045CT	3–69
20CTQ045		MBR2045CT	3–69

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
20FQ020	MBR3545		3–148
20FQ030	MBR3545		3–148
20FQ035	MBR3545		3–148
20FQ040	MBR3545		3–148
20FQ045	MBR3545		3–148
21DQ03		1N5821	3–49
21DQ04		1N5822	3–49
21FQ030	MBR3545		3–148
21FQ035	MBR3545		3–148
21FQ040	MBR3545		3–148
21FQ045	MBR3545		3–148
28CPQ030		MBR3045PT	3–119
28CPQ040		MBR3045PT	3–119
30CTQ030	MBR2545CT		3–80
30CTQ035	MBR2545CT		3–80
30CTQ040	MBR2545CT		3–80
30CTQ045	MBR2545CT		3–80
30DL1	MR852		5–6
30DL2	MR852		5–6
31DQ03		1N5821	3–49
31DQ04		1N5822	3–49
31DQ05		MBR360	3–53
31DQ06		MBR360	3–53
31DQ09		MBR3100	3–57
31DQ10		MBR3100	3–57
40CDQ020	MBR3045CT		3–178
40CDQ030	MBR3045CT		3–178
40CDQ035	MBR3045CT		3–178
40CDQ040	MBR3045CT		3–178
40CDQ045	MBR3045CT		3–178
40D1		MR754	5–8
40D2		MR754	5–8
40D4		MR754	5–8
40D6		MR760	5–8
40D8		MR760	5–8
50HQ020	MBR6045		3–164
50HQ030	MBR6045		3–164
50HQ035		MBR6045	3–164
50HQ040		MBR6045	3–164
50HQ045		MBR6045	3–164
50SQ030		1N5824	3–60
50SQ040		1N5825	3–60
51HQ045	MBR6045		3–164
52HQ030	MBR6045		3–164
52HQ035	MBR6045		3–164
52HQ040	MBR6045		3–164
52HQ045	MBR6045		3–164
55HQ015		MBR7545	3–172
55HQ020		MBR7545	3–172
55HQ025		MBR7545	3–172
55HQ030		MBR7545	3–172
60CDQ020	MBR3045CT		3–178
60CDQ030	MBR3045CT		3–178
60CDQ035	MBR3045CT		3–178
60CDQ040	MBR3045CT		3–178
60CDQ045	MBR3045CT		3–178
6A05		MR754	5–8
6A1		MR754	5–8
6A10		MR760	5–8
6A2		MR754	5–8

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
6A4		MR754	5–8
6A6		MR760	5–8
6A8		MR760	5–8
75HQ030	MBR8045		3–174
75HQ035	MBR8045		3–174
75HQ040	MBR8045		3–174
75HQ045	MBR8045		3–174
85HQ030	MBR8045		3–174
85HQ035	MBR8045		3–174
85HQ040	MBR8045		3–174
85HQ045	MBR8045		3–174
A114A		1N4934	5–3
A114B		1N4935	5–3
A114C		1N4936	5–3
A114D		1N4936	5–3
A114E		1N4937	5–3
A114F		1N4933	5–3
A114M		1N4937	5–3
A115A		MR852	5–6
A115B		MR852	5–6
A115C		MR856	5–6
A115D		MR856	5–6
A115E		MR856	5–6
A115F		MR852	5–6
A115M		MR856	5–6
A14A		1N4002	5–2
A14C		1N4004	5–2
A14D		1N4004	5–2
A14E		1N4005	5–2
A14F		1N4001	5–2
A14M		1N4005	5–2
A14N		1N4006	5–2
A14P		1N4007	5–2
AR25A		MR2504	5–12
AR25B		MR2504	5–12
AR25D		MR2504	5–12
AR25G		MR2504	5–12
AR25J		MR2510	5–12
AR25K		MR2510	5–12
AR25M		MR2510	5–12
ARS25A		MR2504	5–12
ARS25B		MR2504	5–12
ARS25D		MR2504	5–12
ARS25G		MR2504	5–12
ARS25J		MR2510	5–12
ARS25K		MR2510	5–12
ARS25M		MR2510	5–12
BY229–200	MUR820		4–56
BY229–400	MUR840		4–56
BY229–600	MUR860		4–56
BYP21–100		MUR820	4–56
BYP21–150		MUR820	4–56
BYP21–200		MUR820	4–56
BYP21–50		MUR820	4–56
BYP22–100		MUR3020PT	4–90
BYP22–150		MUR3020PT	4–90
BYP22–200		MUR3020PT	4–90
BYP22–50		MUR3020PT	4–90
BYQ28–100		MUR1620CT	4–46
BYQ28–150		MUR1620CT	4–46

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
BYQ28–200		MUR1620CT	4–46
BYQ28–50		MUR1620CT	4–46
BYR29–600	MUR860		4–56
BYS76	MBR7545		3–172
BYS80	MBR3045CT		3–178
BYS92–40		MBRP20045CT	3–182
BYS92–45		MBRP20045CT	3–182
BYS92–50		MBRP20060CT	3–182
BYS93–40		MBRP30045CT	3–183
BYS93–45		MBRP30045CT	3–183
BYS93–50		MBRP30060CT	3–183
BYS95–40		MBRP20045CT	3–182
BYS95–45		MBRP20045CT	3–182
BYS95–50		MBRP20060CT	3–182
BYS97–40		MBRP20045CT	3–182
BYS97–45		MBRP20045CT	3–182
BYS97–50		MBRP20060CT	3–182
BYS98–40		MBRP20045CT	3–182
BYS98–45		MBRP20045CT	3–182
BYS98–50		MBR1545CT	3–64
BYT28–300		MUR1660CT	4–46
BYT28–400		MUR1660CT	4–46
BYT28–500		MUR1660CT	4–46
BYT79–300		MUR1560	4–71
BYT79–400		MUR1560	4–71
BYT79–500		MUR1560	4–71
BYV18–35		MBR1545CT	3–64
BYV18–45		MBR1545CT	3–64
BYV19–35	MBR1045		3–86
BYV19–45	MBR1045		3–86
BYV20–30		1N5827	3–135
BYV20–45		1N5828	3–135
BYV22–35	MBR3545		3–148
BYV22–45	MBR3545		3–148
BYV23–35		MBR8045	3–174
BYV23–45		MBR8045	3–174
BYV26A		MUR120	4–23
BYV26B		MUR140	4–23
BYV26C		MUR160	4–23
BYV27–100		MUR120	4–23
BYV27–150		MUR120	4–23
BYV27–50		MUR120	4–23
BYV28–100		MUR420	4–31
BYV28–150		MUR420	4–31
BYV28–50		MBR2045CT	3–69
BYV29–300		MUR1560	4–71
BYV29–400		MUR1560	4–71
BYV29–500		MUR1560	4–71
BYV33–35	MBR2045CT		3–69
BYV33–40	MBR2045CT		3–69
BYV33–45	MBR2045CT		3–69
BYV39–35	MBR1645		3–92
BYV39–40	MBR1645		3–92
BYV39–45	MBR1645		3–92
BYV43–35		MBR2545CT	3–80
BYV43–40		MBR2545CT	3–80
BYV43–45		MBR2545CT	3–80
BYW29–100	MUR820		4–56
BYW29–150	MUR820		4–56
BYW29–200	MUR820		4–56

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
BYW29–50	MUR820		4–56
BYW29–50	MUR820		4–56
BYW80–100	MUR820		4–56
BYW80–150	MUR820		4–56
BYW80–200	MUR820		4–56
BYW80–50	MUR820		4–56
CPT12035	MBRP20045CT		3–182
CPT12045	MBRP20045CT		3–182
CPT12050	MBRP20060CT		3–182
CPT20035	MBRP20045CT		3–182
CPT20045	MBRP20045CT		3–182
CPT20050	MBRP20060CT		3–182
CPT20120	MBRP20030CTL		3–181
CPT20125	MBRP20030CTL		3–181
CPT30035	MBRP30045CT		3–183
CPT30045	MBRP30045CT		3–183
CPT30050	MBRP30060CT		3–183
EGP10A	MUR120		4–23
EGP10B	MUR120		4–23
EGP10C	MUR120		4–23
EGP10D	MUR120		4–23
EGP20A		MUR420	4–31
EGP20B		MUR420	4–31
EGP20C		MUR420	4–31
EGP20D		MUR420	4–31
EGP30A	MUR420		4–31
EGP30B	MUR420		4–31
EGP30C	MUR420		4–31
EGP30D	MUR420		4–31
EGP50A	MUR420		4–31
EGP50B	MUR420		4–31
EGP50C	MUR420		4–31
EGP50D	MUR420		4–31
ERA81		1N5819	3–38
ERB35	MUR120		4–23
ERB44	1N4935		5–3
ERB91	MUR120		4–23
ERC24	1N4936		5–3
ERC38	MUR140		4–23
ERC62	MBR1045		3–86
ERC80	MBR745		3–84
ERC90	MUR820		4–56
ERC91	MUR420		4–31
ERD80		MBR3045CT	3–178
ERD81	1N5828		3–135
ERE81		1N5834	3–152
ERG81,A		MBR6045	3–164
ESAB33	MUR820		4–56
ESAB82	MBR745		3–84
ESAB92	MUR820		4–56
ESAC33	MUR820		4–56
ESAC82	MBR1045		3–86
ESAC92	MUR1520		4–71
ESAC93		MUR3020PT	4–90
ESAD33		MUR3040PT	4–90
ESAD81	MBR3045CT		3–178
FE16A		MUR1620CT	4–46
FE16B		MUR1620CT	4–46
FE16C		MUR1620CT	4–46
FE16D		MUR1620CT	4–46

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
FE16F		MUR1660CT	4–46
FE16G		MUR1660CT	4–46
FE1A		MUR120	4–23
FE1B		MUR120	4–23
FE1C		MUR120	4–23
FE1D		MUR120	4–23
FE2A		MUR420	4–31
FE2B		MUR420	4–31
FE2C		MUR420	4–31
FE2D		MUR420	4–31
FE3A		MUR420	4–31
FE3B		MUR420	4–31
FE3C		MUR420	4–31
FE3D		MUR420	4–31
FE5A		MUR420	4–31
FE5B		MUR420	4–31
FE5C		MUR420	4–31
FE5D		MUR420	4–31
FE6A		MUR420	4–31
FE6B		MUR420	4–31
FE6C		MUR420	4–31
FE6D		MUR420	4–31
FE8A		MUR820	4–56
FE8B		MUR820	4–56
FE8C		MUR820	4–56
FE8D		MUR820	4–56
FE8F		MUR840	4–56
FE8G		MUR840	4–56
FEP16AT		MUR1620CT	4–46
FEP16BT		MUR1620CT	4–46
FEP16CT		MUR1620CT	4–46
FEP16DT		MUR1620CT	4–46
FEP16FT		MUR1660CT	4–46
FEP16GT		MUR1660CT	4–46
FEP16HT		MUR1660CT	4–46
FEP16JT		MUR1660CT	4–46
FES16AT		MUR1520	4–71
FES16BT		MUR1520	4–71
FES16CT		MUR1520	4–71
FES16DT		MUR1520	4–71
FES16FT		MUR1560	4–71
FES16GT		MUR1560	4–71
FES16HT		MUR1560	4–71
FES16JT		MUR1560	4–71
FES8AT		MUR820	4–56
FES8BT		MUR820	4–56
FES8CT		MUR820	4–56
FES8DT		MUR820	4–56
FES8FT		MUR840	4–56
FES8GT		MUR840	4–56
FES8HT		MUR860	4–56
FES8JT		MUR860	4–56
FR061		1N4933	5–3
FR061L	1N4933		5–3
FR062		1N4934	5–3
FR062L	1N4934		5–3
FR063		1N4935	5–3
FR063L	1N4935		5–3
FR064		1N4936	5–3
FR065		1N4937	5–3

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
FR065L	1N4936		5–3
FR065L	1N4937		5–3
FR101	1N4933		5–3
FR102	1N4934		5–3
FR103	1N4935		5–3
FR104	1N4936		5–3
FR105	1N4937		5–3
FR251		MR852	5–6
FR252		MR852	5–6
FR253		MR852	5–6
FR254		MR856	5–6
FR255		MR856	5–6
FR301	MR852		5–6
FR302	MR852		5–6
FR303	MR852		5–6
FR304	MR856		5–6
FR305	MR856		5–6
FRM3205CC	MUR3020PT		4–90
FRM3210CC	MUR3020PT		4–90
FRM3215CC	MUR3020PT		4–90
FRM3220CC	MUR3020PT		4–90
FRP1605CC	MUR1620CT		4–46
FRP1610CC	MUR1620CT		4–46
FRP1615CC	MUR1620CT		4–46
FRP1620CC	MUR1620CT		4–46
FRP805	MUR820		4–56
FRP810	MUR820		4–56
FRP815	MUR820		4–56
FRP820	MUR820		4–56
FST1240	MBR1545CT		3–64
FST1245	MBR1545CT		3–64
FST1540	MBR1545CT		3–64
FST1545	MBR1545CT		3–64
FST20035		MBRP20045CT	3–182
FST20040		MBRP20045CT	3–182
FST20045		MBRP20045CT	3–182
FST20050		MBRP20060CT	3–182
FST2040	MBR2045CT		3–69
FST2045	MBR2045CT		3–69
FST2050	MBR2060CT		3–73
FST30035		MBRP30045CT	3–183
FST30040		MBRP30045CT	3–183
FST30045		MBRP30045CT	3–183
FST30050		MBRP30060CT	3–183
FST3040	MBR2545CT		3–80
FST3045	MBR2545CT		3–80
FST6035		MBRP20045CT	3–182
FST6040		MBRP20045CT	3–182
FST6045		MBRP20045CT	3–182
FST6050		MBRP20060CT	3–182
GER4001		1N4001	5–2
GER4002		1N4002	5–2
GER4003		1N4003	5–2
GER4004		1N4004	5–2
GER4005		1N4005	5–2
GER4006		1N4006	5–2
GER4007		1N4007	5–2
GI1001		MUR120	4–23
GI1002		MUR120	4–23
GI1003		MUR120	4–23

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
GI1004		MUR120	4–23
GI1101		MUR420	4–31
GI1102		MUR420	4–31
GI1103		MUR420	4–31
GI1104		MUR420	4–31
GI1301		MUR420	4–31
GI1302		MUR420	4–31
GI1303		MUR420	4–31
GI1304		MUR420	4–31
GI1401	MUR820		4–56
GI1402	MUR820		4–56
GI1403	MUR820		4–56
GI1404	MUR820		4–56
GI2401	MUR1620CT		4–46
GI2402	MUR1620CT		4–46
GI2403	MUR1620CT		4–46
GI2404	MUR1620CT		4–46
GI2500	MR2504		5–12
GI2501	MR2504		5–12
GI2502	MR2504		5–12
GI2504	MR2504		5–12
GI2506	MR2510		5–12
GI2508	MR2510		5–12
GI2510	MR2510		5–12
GI5823		1N5823	3–60
GI5824		1N5824	3–60
GI5825		1N5825	3–60
GI750		MR754	5–8
GI751		MR754	5–8
GI752		MR754	5–8
GI754		MR754	5–8
GI756		MR760	5–8
GI758		MR760	5–8
GI850	MR852		5–6
GI851	MR852		5–6
GI852	MR852		5–6
GI854	MR856		5–6
GI856	MR856		5–6
GP10A		1N4001	5–2
GP10B		1N4002	5–2
GP10D		1N4003	5–2
GP10G		1N4004	5–2
GP10J		1N4005	5–2
GP10K		1N4006	5–2
GP10M		1N4007	5–2
GP80A	MUR820		4–56
GP80B	MUR820		4–56
GP80D	MUR820		4–56
GP80G	MUR840		4–56
GP80J	MUR860		4–56
HER101	MUR120		4–23
HER102	MUR120		4–23
HER103	MUR120		4–23
HER104	MUR140		4–23
HER105	MUR140		4–23
HER151		MUR120	4–23
HER152		MUR120	4–23
HER153		MUR120	4–23
HER154		MUR140	4–23
HER155		MUR140	4–23

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
HER301	MUR420		4–31
HER302	MUR420		4–31
HER303	MUR420		4–31
HER801	MUR820		4–56
HER802	MUR820		4–56
HER803	MUR820		4–56
HER804	MUR840		4–56
HER805	MUR840		4–56
MBR10100	MBR10100		3–90
MBR1035	MBR1045		3–86
MBR1045	MBR1045		3–86
MBR1060	MBR1060		3–90
MBR1070	MBR1100		3–46
MBR1080	MBR1100		3–46
MBR1090	MBR1100		3–46
MBR1100	MBR1100		3–46
MBR12035CT	MBRP20045CT		3–182
MBR12045CT	MBRP20045CT		3–182
MBR12050CT	MBRP20060CT		3–182
MBR12060CT	MBRP20060CT		3–182
MBR150	MBR160		3–43
MBR1535CT	MBR1545CT		3–64
MBR1545CT	MBR1545CT		3–64
MBR160	MBR160		3–43
MBR1635	MBR1645		3–92
MBR1645	MBR1645		3–92
MBR170	MBR1100		3–46
MBR180	MBR1100		3–46
MBR190	MBR1100		3–46
MBR20015CTL	MBRP20030CTL		3–181
MBR20020CTL	MBRP20030CTL		3–181
MBR20025CTL	MBRP20030CTL		3–181
MBR20030CTL	MBRP20030CTL		3–181
MBR20035CT	MBRP20045CT		3–182
MBR20045CT	MBRP20045CT		3–182
MBR20050CT	MBRP20060CT		3–182
MBR20060CT	MBRP20060CT		3–182
MBR20100CT	MBR20100CT		3–73
MBR2015CTL	MBR2030CTL		3–66
MBR20200CT	MBR20200CT		3–75
MBR2030CTL	MBR2030CTL		3–66
MBR2035CT	MBR2045CT		3–69
MBR2045CT	MBR2045CT		3–69
MBR2060CT	MBR2060CT		3–73
MBR2070CT	MBR20100CT		3–73
MBR2080CT	MBR20100CT		3–73
MBR2090CT	MBR20100CT		3–73
MBR2535CT	MBR2545CT		3–80
MBR2535CTL	MBR2535CTL		3–78
MBR2545CT	MBR2545CT		3–80
MBR30035CT	MBRP30045CT		3–183
MBR30045CT	MBRP30045CT		3–183
MBR30050CT	MBRP30060CT		3–183
MBR30060CT	MBRP30060CT		3–183
MBR3020CT	MBR3045CT		3–178
MBR3035CT	MBR3045CT		3–178
MBR3035PT	MBR3045PT		3–119
MBR3035WT	MBR3045WT		3–127
MBR3045CT	MBR3045CT		3–178
MBR3045PT	MBR3045PT		3–119

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
MBR3045WT	MBR3045WT		3–127
MBR3100	MBR3100		3–57
MBR320	MBR340		3–53
MBR330	MBR340		3–53
MBR340	MBR340		3–53
MBR350	MBR360		3–53
MBR3520	MBR3545		3–148
MBR3535	MBR3545		3–148
MBR3545	MBR3545		3–148
MBR360	MBR360		3–53
MBR370	MBR3100		3–57
MBR380	MBR3100		3–57
MBR390	MBR3100		3–57
MBR4045PT	MBR4045PT		3–121
MBR4045WT	MBR4045WT		3–131
MBR5025L	MBR5025L		3–125
MBR60035CTL	MBRP60035CTL		3–184
MBR6015L	MBR6030L		3–160
MBR6020L	MBR6030L		3–160
MBR6025L	MBR6030L		3–160
MBR6030L	MBR6030L		3–160
MBR6035	MBR6045		3–164
MBR6045	MBR6045		3–164
MBR6045PT	MBR6045PT		3–123
MBR6045WT	MBR6045WT		3–133
MBR6535	MBR6545		3–168
MBR6545	MBR6545		3–168
MBR735	MBR745		3–84
MBR745	MBR745		3–84
MBR7535	MBR7545		3–172
MBR7545	MBR7545		3–172
MBR8035	MBR8045		3–174
MBR8045	MBR8045		3–174
MBRB1545CT	MBRB1545CT		3–24
MBRB20100CT	MBRB20100CT		3–28
MBRB2060CT	MBRB2060CT		3–26
MBRB2515L	MBRB2515L		3–32
MBRB2535CTL	MBRB2535CTL		3–34
MBRB2545CT	MBRB2545CT		3–36
MBRD320	MBRD340		3–15
MBRD330	MBRD340		3–15
MBRD340	MBRD340		3–15
MBRD350	MBRD360		3–15
MBRD360	MBRD360		3–15
MBRD620CT	MBRD640CT		3–18
MBRD630CT	MBRD640CT		3–18
MBRD640CT	MBRD640CT		3–18
MBRD650CT	MBRD660CT		3–18
MBRD660CT	MBRD660CT		3–18
MBRF2535CT	MBRF2545CT		3–109
MBRF2545CT	MBRF2545CT		3–109
MBRS1100T3	MBRS1100T3		3–11
MBRS130LT3	MBRS130LT3		3–7
MBRS140T3	MBRS140T3		3–9
MBRS340T3	MBRS340T3		3–13
MR2500	MR2504		5–12
MR2501	MR2504		5–12
MR2502	MR2504		5–12
MR2504	MR2504		5–12
MR2506	MR2510		5–12

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
MR2508	MR2510		5–12
MR2510	MR2510		5–12
MR2535L	MR2535L		5–19
MR4422CT	MR4422CT		5–18
MR4422CTR	MR4422CTR		5–18
MR750	MR754		5–8
MR751	MR754		5–8
MR752	MR754		5–8
MR754	MR754		5–8
MR756	MR760		5–8
MR758	MR760		5–8
MR760	MR760		5–8
MR850	MR852		5–6
MR851	MR852		5–6
MR852	MR852		5–6
MR854	MR856		5–6
MR856	MR856		5–6
MUR10005CT	MURP20020CT		4–116
MUR10010CT	MURP20020CT		4–116
MUR10015CT	MURP20020CT		4–116
MUR10020CT	MURP20020CT		4–116
MUR10120E	MUR10120E		4–65
MUR10150E	MUR10150E		4–68
MUR105	MUR120		4–23
MUR110	MUR120		4–23
MUR1100E	MUR1100E		4–27
MUR115	MUR120		4–23
MUR120	MUR120		4–23
MUR130	MUR140		4–23
MUR140	MUR140		4–23
MUR150	MUR160		4–23
MUR1505	MUR1520		4–71
MUR1510	MUR1520		4–71
MUR1515	MUR1520		4–71
MUR1520	MUR1520		4–71
MUR1530	MUR1540		4–71
MUR1540	MUR1540		4–71
MUR1550	MUR1560		4–71
MUR1560	MUR1560		4–71
MUR160	MUR160		4–23
MUR1605CT	MUR1620CT		4–46
MUR1605CTR	MUR1620CTR		4–51
MUR1610CT	MUR1620CT		4–46
MUR1610CTR	MUR1620CTR		4–51
MUR1615CT	MUR1620CT		4–46
MUR1615CTR	MUR1620CTR		4–51
MUR1620CT	MUR1620CT		4–46
MUR1620CTR	MUR1620CTR		4–51
MUR1630CT	MUR1640CT		4–46
MUR1640CT	MUR1640CT		4–46
MUR1650CT	MUR1660CT		4–46
MUR1660CT	MUR1660CT		4–46
MUR170E	MUR1100E		4–27
MUR180E	MUR1100E		4–27
MUR190E	MUR1100E		4–27
MUR20005CT	MURP20020CT		4–116
MUR20010CT	MURP20020CT		4–116
MUR20015CT	MURP20020CT		4–116
MUR20020CT	MURP20020CT		4–116
MUR20030CT	MURP20040CT		4–116
MUR20040CT	MURP20040CT		4–116
MUR3005PT	MUR3020PT		4–90
MUR3010PT	MUR3020PT		4–90
MUR3015PT	MUR3020PT		4–90
MUR3020PT	MUR3020PT		4–90
MUR3020WT	MUR3020WT		4–85
MUR3030PT	MUR3040PT		4–90
MUR3040	MUR3040		4–95
MUR3040PT	MUR3040PT		4–90
MUR3040WT	MUR3040WT		4–85
MUR3050PT	MUR3060PT		4–90
MUR3060PT	MUR3060PT		4–90
MUR3060WT	MUR3060WT		4–85
MUR405	MUR420		4–31
MUR410	MUR420		4–31
MUR4100E	MUR4100E		4–35
MUR415	MUR420		4–31
MUR420	MUR420		4–31
MUR450	MUR460		4–31
MUR460	MUR460		4–31
MUR470E	MUR4100E		4–35
MUR480E	MUR4100E		4–35
MUR490E	MUR4100E		4–35
MUR5150E	MUR5150E		4–54
MUR6020	MUR6040		4–98
MUR6030	MUR6040		4–98
MUR6040	MUR6040		4–98
MUR605CT	MUR620CT		4–39
MUR610CT	MUR620CT		4–39
MUR615CT	MUR620CT		4–39
MUR620CT	MUR620CT		4–39
MUR805	MUR820		4–56
MUR810	MUR820		4–56
MUR8100E	MUR8100E		4–61
MUR815	MUR820		4–56
MUR820	MUR820		4–56
MUR830	MUR840		4–56
MUR840	MUR840		4–56
MUR850	MUR860		4–56
MUR860	MUR860		4–56
MUR870E	MUR8100E		4–61
MUR880E	MUR8100E		4–61
MUR890E	MUR8100E		4–61
MURD305	MURD320		4–8
MURD310	MURD320		4–8
MURD315	MURD320		4–8
MURD320	MURD320		4–8
MURD605CT	MURD620CT		4–11
MURD610CT	MURD620CT		4–11
MURD615CT	MURD620CT		4–11
MURD620CT	MURD620CT		4–11
MURH840CT	MURH840CT		4–11
MURH860CT	MURH860CT		4–11
MURHB840CT	MURHB840CT		4–14
MURS120T3	MURS120T3		4–2
MURS160T3	MURS160T3		4–2
MURS320T3	MURS320T3		4–5
MURS360T3	MURS360T3		4–5
P600A		MR754	5–8
P600B		MR754	5–8

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
P600D		MR754	5–8
P600G		MR754	5–8
P600J		MR760	5–8
P600K		MR760	5–8
R710XPT		MUR3020WT	4–85
R711	MR4422CT		5–18
R711A	MR4422CTR		5–18
R711X		MUR3020WT	4–85
R711XPT		MUR3020WT	4–85
R712X		MUR3020WT	4–85
R712XPT		MUR3040WT	4–85
R714X		MUR3040WT	4–85
R714XPT		MUR3020WT	4–85
RA2505	MR2504		5–12
RA251	MR2504		5–12
RA2510	MR2510		5–12
RA252	MR2504		5–12
RA253	MR2504		5–12
RA254	MR2504		5–12
RA255	MR2510		5–12
RA256	MR2510		5–12
RA258	MR2510		5–12
RG1A		1N4933	5–3
RG1B		1N4934	5–3
RG1D		1N4935	5–3
RG1G		1N4936	5–3
RG1J		1N4937	5–3
RG2A		MR852	5–6
RG2B		MR852	5–6
RG2D		MR852	5–6
RG2G		MR856	5–6
RG2J		MR856	5–6
RG3A		MR852	5–6
RG3B		MR852	5–6
RG3D		MR852	5–6
RG3G		MR856	5–6
RG3J		MR856	5–6
RG4A		MR852	5–6
RG4B		MR852	5–6
RG4D		MR852	5–6
RG4G		MR856	5–6
RG4J		MR856	5–6
RGM30A		MUR3020PT	4–90
RGM30B		MUR3020PT	4–90
RGM30D		MUR3020PT	4–90
RGM30G		MUR3040PT	4–90
RGP10A		1N4933	5–3
RGP10B		1N4934	5–3
RGP10D		1N4935	5–3
RGP10G		1N4936	5–3
RGP10J		1N4937	5–3
RGP15A		MR852	5–6
RGP15B		MR852	5–6
RGP15D		MR852	5–6
RGP15G		MR856	5–6
RGP15J		MR856	5–6
RGP20A		MR852	5–6
RGP20B		MR852	5–6
RGP20D		MR852	5–6
RGP20G		MR856	5–6

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
RGP20J		MR856	5–6
RGP25A		MR852	5–6
RGP25B		MR852	5–6
RGP25D		MR852	5–6
RGP25G		MR856	5–6
RGP25J		MR856	5–6
RGP30A		MR852	5–6
RGP30B		MR852	5–6
RGP30D		MR852	5–6
RGP30G		MR856	5–6
RGP30J		MR856	5–6
RGP80A	MUR820		4–56
RGP80B	MUR820		4–56
RGP80D	MUR820		4–56
RGP80G	MUR840		4–56
RGP80J	MUR860		4–56
RL061	1N4001		5–2
RL062	1N4002		5–2
RL063	1N4003		5–2
RL064	1N4004		5–2
RL065	1N4005		5–2
RL066	1N4006		5–2
RL067	1N4007		5–2
RL251		1N5400	5–5
RL252		1N5401	5–5
RL253		1N5402	5–5
RL254		1N5404	5–5
RL255		1N5406	5–5
RL256		1N5406	5–5
RL257		1N5406	5–5
RP300A	MR852		5–6
RP300B	MR852		5–6
RP300D	MR852		5–6
RP300G	MR856		5–6
RP300J	MR856		5–6
RUD810	MUR1620CT		4–46
RUD815	MUR1620CT		4–46
RUD820	MUR1620CT		4–46
RUR810	MUR820		4–56
RUR815	MUR820		4–56
RUR820	MUR820		4–56
RURD1610		MUR3020PT	4–90
RURD1615		MUR3020PT	4–90
RURD1620		MUR3020PT	4–90
SB1020	MBR1045		3–86
SB1035	MBR1045		3–86
SB1040	MBR1045		3–86
SB1045	MBR1045		3–86
SB120		1N5817	3–38
SB130		1N5818	3–38
SB140		1N5819	3–38
SB150		MBR160	3–43
SB160		MBR160	3–43
SB1620		MBR1545CT	3–64
SB1630		MBR1545CT	3–64
SB1640		MBR1545CT	3–64
SB1645		MBR1545CT	3–64
SB3020	MBR3045CT		3–178
SB3030	MBR3045CT		3–178
SB3040	MBR3045CT		3–178

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
SB3045	MBR3045CT		3–178
SB320		MBR340	3–53
SB330		MBR340	3–53
SB340		MBR340	3–53
SB350		MBR360	3–53
SB360		MBR360	3–53
SB520		1N5823	3–60
SB530		1N5824	3–60
SB540		1N5825	3–60
SB820		MBR745	3–84
SB830		MBR745	3–84
SB840		MBR745	3–84
SB845		MBR745	3–84
SB850	MBR1060		3–90
SB860	MBR1060		3–90
SBP1020T	MBR1545CT		3–64
SBP1030T	MBR1545CT		3–64
SBP1035T	MBR1545CT		3–64
SBP1040T	MBR1545CT		3–64
SBP1045T	MBR1545CT		3–64
SBP1620T	MBR1545CT		3–64
SBP1630T	MBR1545CT		3–64
SBP1635T	MBR1545CT		3–64
SBP1640T	MBR1545CT		3–64
SBP1645T	MBR1545CT		3–64
SBR1040	MBR1045		3–86
SBR1045	MBR1045		3–86
SBR1050	MBR1060		3–90
SBR1640	MBR1645		3–92
SBR1645	MBR1645		3–92
SBR2520		1N5832	3–152
SBR2530		1N5833	3–152
SBR3035		MBR3545	3–148
SBR3045		MBR3545	3–148
SBR3540	MBR3545		3–148
SBR3545	MBR3545		3–148
SBR6025		MBR6045	3–164
SBR8035		MBR8045	3–174
SBR8040	MBR8045		3–174
SBR8040		MBR8045	3–174
SBR8045	MBR8045		3–174
SBR8045		MBR8045	3–174
SBS1020T	MBR1045		3–86
SBS1030T	MBR1045		3–86
SBS1035T	MBR1045		3–86
SBS1040T	MBR1045		3–86
SBS1045T	MBR1045		3–86
SBS1620T	MBR1645		3–92
SBS1630T	MBR1645		3–92
SBS1635T	MBR1645		3–92
SBS1640T	MBR1645		3–92
SBS1645T	MBR1645		3–92
SBS520T	MBR745		3–84
SBS530T	MBR745		3–84
SBS535T	MBR745		3–84
SBS540T	MBR745		3–84
SBS545T	MBR745		3–84
SBS820T		MBR745	3–84
SBS830T		MBR745	3–84
SBS835T		MBR745	3–84

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
SBS840T		MBR745	3–84
SBS845T		MBR745	3–84
SBS850T		MBR1060	3–90
SBS860T		MBR1060	3–90
SBT3035	MBR3045CT		3–178
SBT3040	MBR3045CT		3–178
SBT3045	MBR3045CT		3–178
SD241	SD241		3–178
SD41	SD41		3–144
SD41	SD41		3–144
SD41	SD41		3–144
SD51	SD51		3–156
SES5001		MUR120	4–23
SES5002		MUR120	4–23
SES5003		MUR120	4–23
SES5301		MUR420	4–31
SES5302		MUR420	4–31
SES5303		MUR420	4–31
SES5401	MUR820		4–56
SES5401C	MUR1620CT		4–46
SES5402	MUR820		4–56
SES5402C	MUR1620CT		4–46
SES5403	MUR820		4–56
SES5403C	MUR1620CT		4–46
SES5404	MUR820		4–56
SES5404C	MUR1620CT		4–46
SES5501	MUR1520		4–71
SES5502	MUR1520		4–71
SES5503	MUR1520		4–71
SES5504	MUR1520		4–71
SI231		MBR3045CT	3–178
SI232		MBR3045CT	3–178
SI31		MBR3545	3–148
SI32		MBR3545	3–148
SI71		MBR7545	3–172
SR1002	MBR1045		3–86
SR1003	MBR1045		3–86
SR1004	MBR1045		3–86
SR1005	MBR1060		3–90
SR1006	MBR1060		3–90
SR102	MBR160		3–43
SR103	MBR160		3–43
SR104	MBR160		3–43
SR105	MBR160		3–43
SR106	MBR160		3–43
SR1602		MBR1545CT	3–64
SR1603		MBR1545CT	3–64
SR1604		MBR1545CT	3–64
SR302	MBR340		3–53
SR303	MBR340		3–53
SR304	MBR340		3–53
SR305	MBR360		3–53
SR306	MBR360		3–53
SR802		MBR745	3–84
SR803		MBR745	3–84
SR804		MBR745	3–84
SRP100A		1N4933	5–3
SRP100B		1N4934	5–3
SRP100D		1N4935	5–3
SRP100G		1N4936	5–3

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
SRP100J	1N4937		5–3
SRP300A		MR852	5–6
SRP300B		MR852	5–6
SRP300D		MR852	5–6
SRP300G		MR856	5–6
SRP300J	MR856		5–6
TG26	MUR460		4–31
TG284	MUR1640CT		4–46
TG286	MUR1660CT		4–46
TG288	MUR1660CT		4–46
TG4	MUR140		4–23
TG6	MUR160		4–23
TG84	MUR840		4–56
TG86	MUR860		4–56
UES1001		MUR120	4–23
UES1002		MUR120	4–23
UES1003		MUR120	4–23
UES1101		MUR120	4–23
UES1102		MUR120	4–23
UES1103		MUR120	4–23
UES1104		MUR120	4–23
UES1105		MUR140	4–23
UES1106		MUR140	4–23
UES1301		MUR420	4–31
UES1302		MUR420	4–31
UES1303		MUR420	4–31
UES1304		MUR420	4–31
UES1401	MUR820		4–56
UES1402	MUR820		4–56
UES1403	MUR820		4–56
UES1404	MUR820		4–56
UES1420	MUR860		4–56
UES1501	MUR1520		4–71
UES1502	MUR1520		4–71
UES1503	MUR1520		4–71
UES1504	MUR1520		4–71
UES2401	MUR1620CT		4–46
UES2402	MUR1620CT		4–46
UES2403	MUR1620CT		4–46
UES2404	MUR1620CT		4–46
UES2601		MUR3020PT	4–90
UES2602		MUR3020PT	4–90
UES2603		MUR3020PT	4–90
UES2604		MUR3020PT	4–90
UES2605		MUR3040PT	4–90
UES2606		MUR3040PT	4–90
UF4001	MUR120		4–23
UF4002	MUR120		4–23
UF4003	MUR120		4–23
UF4004		MUR140	4–23
UF5400	MUR420		4–31
UF5401	MUR420		4–31
UF5402	MUR420		4–31
USD1120	MBR160		3–43
USD1130	MBR160		3–43
USD1140	MBR160		3–43
USD320C		MBR3045CT	3–178
USD335C		MBR3045CT	3–178
USD345C		MBR3045CT	3–178
USD520	MBR8045		3–174

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
USD535	MBR8045		3–174
USD545	MBR8045		3–174
USD550	MBR8045		3–174
USD620	MBR745		3–84
USD620C	MBR1545CT		3–64
USD635	MBR745		3–84
USD635C	MBR1545CT		3–64
USD640	MBR745		3–84
USD640C	MBR1545CT		3–64
USD645	MBR745		3–84
USD645C	MBR1545CT		3–64
USD720	MBR1045		3–86
USD720C	MBR1545CT		3–64
USD735	MBR1045		3–86
USD735C	MBR1545CT		3–64
USD740	MBR1045		3–86
USD740C	MBR1545CT		3–64
USD745	MBR1045		3–86
USD745C	MBR1545CT		3–64
USD820	MBR1645		3–92
USD835	MBR1645		3–92
USD840	MBR1645		3–92
USD845	MBR1645		3–92
USD920	MBR1645		3–92
USD935	MBR1645		3–92
USD940	MBR1645		3–92
USD945	MBR1645		3–92
UT234		1N4003	5–2
UT235		1N4004	5–2
UT236		1N4002	5–2
UT237		1N4005	5–2
UT238		1N4005	5–2
UT242		1N4003	5–2
UT244		1N4004	5–2
UT245		1N4005	5–2
UT247		1N4005	5–2
UT249		1N4002	5–2
UT251		1N4002	5–2
UT252		1N4003	5–2
UT254		1N4004	5–2
UT255		1N4005	5–2
UT257		1N4005	5–2
UT258		1N4006	5–2
UT347		1N4007	5–2
UT361		1N4006	5–2
UT362		1N4006	5–2
UT363		1N4007	5–2
UT364		1N4007	5–2
UTR01		1N4933	5–3
UTR02		1N4933	5–3
UTR10		1N4934	5–3
UTR11		1N4934	5–3
UTR12		1N4934	5–3
UTR20		1N4935	5–3
UTR21		1N4935	5–3
UTR22		1N4935	5–3
UTR2305		MR852	5–6
UTR2310		MR852	5–6
UTR2320		MR852	5–6
UTR2340		MR856	5–6

INDEX AND CROSS REFERENCE (continued)

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
UTR2350		MR856	5–6
UTR2360		MR856	5–6
UTR30		1N4936	5–3
UTR31		1N4936	5–3
UTR32		1N4936	5–3
UTR3305		MR852	5–6
UTR3310		MR852	5–6
UTR3320		MR852	5–6
UTR3340		MR856	5–6
UTR3350		MR856	5–6
UTR3360		MR856	5–6
UTR40		1N4936	5–3
UTR41		1N4936	5–3
UTR42		1N4936	5–3
UTR4305		MR852	5–6
UTR4310		MR852	5–6
UTR4320		MR852	5–6
UTR4340		MR852	5–6
UTR4350		MR856	5–6
UTR4360		MR856	5–6
UTR50		1N4937	5–3
UTR51		1N4937	5–3
UTR52		1N4937	5–3
UTR60		1N4937	5–3
UTR61		1N4937	5–3
UTR62		1N4937	5–3
UTX105		1N4933	5–3
UTX110		1N4934	5–3
UTX115		1N4935	5–3
UTX120		1N4935	5–3
UTX125		1N4935	5–3
UTX205		1N4933	5–3
UTX210		1N4934	5–3
UTX215		1N4935	5–3
UTX220		1N4935	5–3
UTX225		1N4935	5–3
UTX3105		MR852	5–6
UTX3110		MR852	5–6
UTX3115		MR852	5–6
UTX3120		MR852	5–6
UTX4105		MR852	5–6
UTX4110		MR852	5–6
UTX4115		MR852	5–6
UTX4120		MR852	5–6
V322	1N5402		5–5
V324	1N5404		5–5
V326	1N5406		5–5
V330X	MR852		5–6
V331X	MR852		5–6
V332X	MR852		5–6
V334X	MR856		5–6
V336X	MR856		5–6
V342	1N5402		5–5
V344	1N5404		5–5
V346	1N5406		5–5
V350X	MR852		5–6
V351X	MR852		5–6
V352X	MR852		5–6
V354X	MR856		5–6
V356X	MR856		5–6

Industry Part Number	Motorola Nearest Replacement	Motorola Similar Replacement	Page Number
VHE1401		MUR820	4–56
VHE1402		MUR820	4–56
VHE1403		MUR820	4–56
VHE1404		MUR820	4–56
VHE205	MUR120		4–23
VHE210	MUR120		4–23
VHE215	MUR120		4–23
VHE220	MUR120		4–23
VHE2401		MUR1620CT	4–46
VHE2402		MUR1620CT	4–46
VHE2403		MUR1620CT	4–46
VHE2404		MUR1620CT	4–46
VHE605	MUR420		4–31
VHE610	MUR420		4–31
VHE615	MUR420		4–31
VHE620	MUR420		4–31
VSK1020	MBR1045		3–86
VSK1035	MBR1045		3–86
VSK1045	MBR1045		3–86
VSK12	MBR1545CT		3–64
VSK120		1N5817	3–38
VSK13	MBR1545CT		3–64
VSK130		1N5818	3–38
VSK14	MBR1545CT		3–64
VSK140		1N5819	3–38
VSK1520	1N5829		3–139
VSK1530	1N5830		3–139
VSK1540	1N5831		3–139
VSK2004	MBRP20060CT		3–182
VSK2020	MBR2045CT		3–69
VSK2035	MBR2045CT		3–69
VSK2045	MBR2045CT		3–69
VSK2420	MBR2545CT		3–80
VSK2435	MBR2545CT		3–80
VSK2445	MBR2545CT		3–80
VSK3020S	MBR3545		3–148
VSK3020T	MBR3045CT		3–178
VSK3030S	MBR3545		3–148
VSK3030T	MBR3045CT		3–178
VSK3040S	MBR3545		3–148
VSK3040T	MBR3045CT		3–178
VSK32	MBR3545		3–148
VSK320	MBR340		3–53
VSK330	MBR340		3–53
VSK340	MBR340		3–53
VSK4020	1N5832		3–152
VSK4030	1N5833		3–152
VSK4040	1N5834		3–152
VSK41	SD41		3–144
VSK51	SD51		3–156
VSK62	MBR745		3–84
VSK63	MBR745		3–84
VSK64	MBR745		3–84
VSK920		MBR1545CT	3–64
VSK935		MBR1545CT	3–64
VSK945		MBR1545CT	3–64

Section 2

Selector Guide

In Brief . . .

Continuing investment in research and development for discrete products has created a rectifier manufacturing facility that matches the precision and versatility of the most advanced integrated circuits. As a result, Motorola's silicon rectifiers span all high tech applications with quality levels capable of passing the most stringent environmental tests . . . including those for automotive under–hood applications.

Product Highlights:

- Surface Mount Devices — A major thrust has been the development and introduction of a broad range of power rectifiers, Schottky and Ultrafast, 1/2 amp to 25 amp, 15 to 600 volts.
- Application Specific Rectifiers —
  - — MEGAHERTZ ™ series for high frequency power supplies and power factor correction.
  - — Schottky rectifiers having lower forward voltage drop (0.3 to 0.6 volts) for use in low voltage SMPS outputs and as "OR"ing diodes.
  - — Automotive transient suppressors.
- Ultrafast rectifiers having reverse recovery times as low as 25 ns to complement the Schottky devices for higher voltage requirements in high frequency applications.
- A wide variety of package options to match virtually any potential requirement.

The rectifier selector section that follows has generally been arranged by package and technology. The individual tables have been sorted by voltage and current with the package types for the devices listed shown above each table. The Application Specific Rectifiers are also included in their respective tables.

Motorola's commitment to Six–Sigma is showing its worth. Refined processes no longer produce fallout as such and therefore only **Motorola Preferred Devices** are listed in the tables. The non–preferred devices will continue to be offered, but customers are encouraged to begin designing using the preferred types.

	Page
Rectifier Numbering System	2–2
Application Specific Rectifiers	2–3
Low V_F Schottky	2–3
MEGAHERTZ	2–3
SCANSWITCH	2–3
Automotive Transient Suppressors	2–3
SWITCHMODE™ Rectifiers	2–4
Surface Mount Schottky	2–4
Axial Lead Schottky	2–6
TO–220 Type Schottky	2–7
TO–218 Types and TO–247 Schottky	2–8
TO–204AA, DO–203AA and DO–203AB Schottky Metal Packages	2–9
POWERTAP II and SOT–227B Schottky	2–10
Ultrafast Rectifiers	2–11
Surface Mount Ultrafast	2–11
Axial Lead Ultrafast	2–11
TO–220 Type Ultrafast	2–12
TO–218 Types and TO–247 Ultrafast	2–13
POWERTAP II and SOT–227B Ultrafast	2–13
Fast Recovery Rectifiers/General Purpose Rectifiers	2–14

RECTIFIER NUMBERING SYSTEM

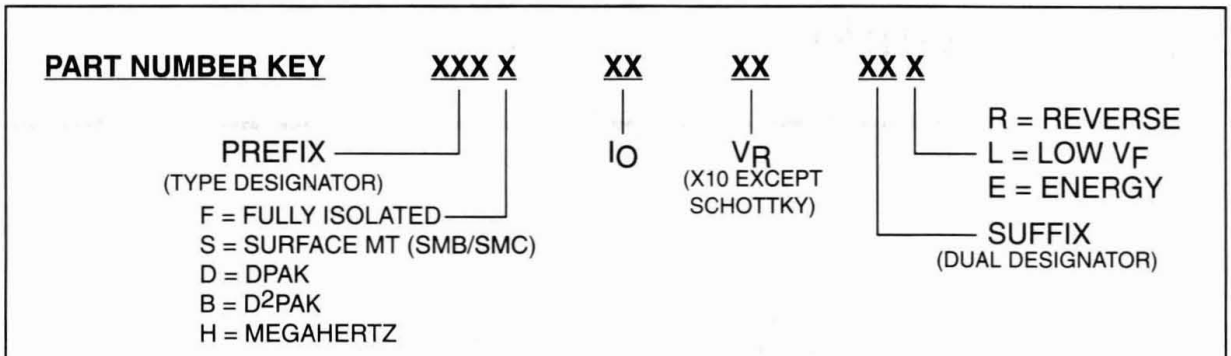

PREFIX KEY

MUR = MOTOROLA ULTRA FAST RECTIFIER
MBR = MOTOROLA (SCHOTTKY) BARRIER RECTIFIER
MR = MOTOROLA STANDARD & FAST RECOVERY

SUFFIX KEY

CT = CENTER TAP (DUAL) TO–220, TO–3, POWERTAP
PT = CENTER TAP (DUAL) TO–218 PACKAGE
WT = CENTER TAP (DUAL) TO–247 / TO–3P

EXAMPLE:	MUR	30	20	WT
	MOTOROLA ULTRAFAST	30 AMP	200 V	CENTER TAP (DUAL) TO–247
EXAMPLE:	MBR	30	45	WT
	MOTOROLA SCHOTTKY	30 AMP	45 V	CENTER TAP (DUAL) TO–247

Application Specific Rectifiers

The focus for Rectifier Products continues to be on Schottky and Ultrafast technologies, with process and packaging improvements to achieve greater efficiency in high frequency switching power supplies, and high current mainframe supplies. Our new product thrust is intended to be more "application specific" than in the past, while continuing to strive for broad market acceptance.

Table 1. Low V_F Schottky Rectifiers

State of the art geometry is used in low V_F Schottky devices for improved efficiency in low voltage, high frequency switching power supplies, free–wheeling diodes, polarity protection diodes and "OR"ing diodes.

Device	I_O Amps	V_{RRM} (Volts)	V_F @ Rated I_O and Temperature Volts (Max)	I_R @ Rated V_{RRM} mAmps (Max)	Package	Page
MBR0520LT1	0.5	20	0.33	0.25	SOD-123	3–2
MBRS130LT3	1	30	0.395	1	SMB	3–7
MBRD835L	8	35	0.41	1.4	DPAK	3–21
MBRD1035CTL	10	35	0.41	6	DPAK	—
MBR2030CTL	20	30	0.48	5	TO-220	3–66
MBRB2535CTL	25	35	0.41	10	D^2PAK	3–34
MBR2535CTL	25	35	0.41	5	TO-220	3–78
MBRB2515L	25	15	0.42	15	D^2PAK	3–32
MBR2515L	25	15	0.42	15	TO-220	3–77
MBRB3030CTL	30	30	0.58	5	D^2PAK	—
MBR4015LWT	40	15	0.42	5	TO-247	3–129
MBR5025L	50	25	0.58	0.5	TO-218 TYPE	3–125
MBR6030L	60	30	0.38	50	DO-203AB	3–160
MBRP20030CTL	200	30	0.39	5	POWERTAP	3–181
MBRP60035CTL	600	35	0.50	10	POWERTAP	3–184

Table 2. MEGAHERTZ Rectifiers

MEGAHERTZ Series — This group of ultrafast rectifiers is designed to provide improved efficiency in very high frequency switching power supplies and for use in power factor correction circuits.

Device	I_O Amps	V_{RRM} (Volts)	Maximum		t_{rr} (Nanosecond)	Page
			V_F @ Rated I_O and Temp. (Volts)	I_R @ Rated V_{RRM} (mAmps)		
MURH840CT	8	400	1.7	0.01	28	4–41
MURH860CT	8	600	2.0	0.01	28	4–44

Table 3. SCANSWITCH Rectifiers

These ultrafast rectifiers are designed for improved performance in very high resolution monitors and work stations where forward recovery time (t_{fr}) and high voltage (1200–1500 volts) are primary considerations.

Device	I_O Amps	V_{RRM} (Volts)	Maximum		V_{RFM} (6) (Volts)	Page
			t_{fr} (Nanoseconds)	t_{rr} (Nanoseconds)		
MUR5150E	5	1500	225	175	20	4–54
MUR880E	8	800	—	75	—	—
MUR10120E	10	1200	175	175	14	4–65
MUR10150E	10	1500	175	175	16	4–68

Table 4. Automotive Transient Suppressors

Automotive transient suppressors are designed for protection against over–voltage conditions in the auto electrical system including the "LOAD DUMP" phenomenon that occurs when the battery open circuits while the car is running.

Device	I_O Amps	V_{RRM} (Volts)	$V_{(BR)}$ (Volts)	I_{RSM}(7) (Amps)	T (°C)	Page
MR2535L	35	20	24–32	110	175	5–19

(6) V_{RFM} = Maximum Transient Overshoot Voltage.
(7) Time constant = 10 ms, Duty Cycle ≤ 1%, T_C = 25°C.

Devices listed in bold, italic are Motorola preferred devices.

SWITCHMODE™ Rectifiers

Schottky power rectifiers with the high speed and low forward voltage drop characteristic of Schottky's metal/silicon junctions are produced with ruggedness and temperature performance comparable to silicon–junction rectifiers. Ideal for use in low–voltage, high–frequency power supplies, and as very fast clamping diodes, these devices feature switching times less than 10 ns, and are offered in current ranges from 0.5 to 600 amperes, and reverse voltages to 200 volts.

In some current ranges, devices are available with junction temperature specifications of 125°C, 150°C and 175°C. Devices with higher T_J ratings can have significantly lower leakage currents, but higher forward–voltage specifications. These parameter tradeoffs should be considered when selecting devices for applications that can be satisfied by more than one device type number.

All devices are connected cathode–to–case or cathode–to–heatsink, where applicable. Contact your Motorola representative for more information.

There are many other standard features in Motorola Schottky rectifiers that give added performance and reliability.

1. GUARDRINGS were pioneered by Motorola and are included in all Schottky die for reverse voltage stress protection from high rates of dv/dt to virtually eliminate the need for snubber networks. The guardring also operates like a zener and avalanches when subjected to voltage transients.

2. MOLYBDENUM DISCS on both sides of the die minimize fatigue from power cycling in all metal products. Plastic encapsulated devices have a special solder formulation for the same purpose.

3. QUALITY CONTROL monitors all critical fabrication operations and performs selected stress tests to assure constant processes. Motorola's commitment to six sigma has provided significant quality improvement.

Case 425
SOD–123

Cathode = Notch

Case 403A
SMB

Cathode = Notch

Case 403
SMC

Cathode = Notch

Table 5. Surface Mount Schottky Rectifiers

V_{RRM} (Volts)	I_O[1] (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Package	Page
20	0.5	T_L = 105°C	***MBR0520LT1*** ★	0.310 @ 0.1 A 0.385 @ 0.5 A	5	125	SOD-123	3–2
30	0.5	T_L = 105°C	***MBR0530T1*** ★	0.375 @ 0.1 A 0.430 @ 0.5 A	5	125	SOD-123	3–4
40	0.5	T_L = 110°C	***MBR0540T1*** ★	0.53 @ 0.5 A	20	150	SOD-123	3–6
30	1	T_L = 120°C	***MBRS130LT3***	0.395 @ 1.0 A	40	125	SMB	3–7
40	1	T_L = 115°C	***MBRS140T3***	0.6 @ 1.0 A	40	125	SMB	3–9
100	1	T_L = 120°C	***MBRS1100T3***	0.75 @ 1.0 A	40	150	SMB	3–11
40	3	T_L = 100°C	***MBRS340T3***	0.525 @ 3.0 A	80	125	SMC	3–13
60	3	T_L = 100°C	***MBRS360T3*** ★	0.74 @ 3.0 A	80	125	SMC	3–13

(1) I_O is total device current capability.
★ New Product

Devices listed in bold, italic are Motorola preferred devices.

Case 369A
DPAK
Style 3



Case 418B
D^2PAK
Style 3

"CT" Suffix:



Non–"CT" Suffix:



Table 5. Surface Mount Schottky Rectifiers (continued)

V_{RRM} (Volts)	I_O(1) (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Package	Page
40	3	T_C = 125°C	***MBRD340***	0.60 @ 3.0 A	75	150	DPAK	3–15
60	3	T_C = 125°C	***MBRD360***	0.60 @ 3.0 A	75	150	DPAK	3–15
40	6	T_C = 130°C	***MBRD640CT***	0.70 @ 3.0 A	75	150	DPAK	3–18
60	6	T_C = 130°C	***MBRD660CT***	0.70 @ 3.0 A	75	150	DPAK	3–18
35	8	T_C = 100°C	***MBRD835L*** ★	0.40 @ 3.0 A 0.51 @ 8.0 A	100	125	DPAK	3–21
35	10	T_C = 90°C	***MBRD1035CTL***★	0.49 @ 10 A	100	125	DPAK	—
45	15	T_C = 105°C	***MBRB1545CT***	0.84 @ 15 A	150	150	D^2PAK	3–24
60	20	T_C = 110°C	***MBRB2060CT***	0.95 @ 20 A	150	150	D^2PAK	3–26
100	20	T_C = 110°C	***MBRB20100CT***	0.85 @ 10 A 0.95 @ 20 A	150	150	D^2PAK	3–28
200	20	T_C = 125°C	***MBRB20200CT***★	1.0 @ 20 A	150	150	D^2PAK	3–30
15	25	T_C = 90°C	***MBRB2515L***★	0.45 @ 25 A	150	100	D^2PAK	3–32
35	25	T_C = 110°C	***MBRB2535CTL***	0.47 @ 12.5 A 0.55 @ 25 A	150	125	D^2PAK	3–34
45	25	T_C = 130°C	***MBRB2545CT***	0.82 @ 30 A	150	150	D^2PAK	3–36
30	30	T_C = 115°C	***MBRB3030CT***★	0.51 @ 15 A 0.62 @ 30 A	300	150	D^2PAK	3–190
30	30	T_C = 95°C	***MBRB3030CTL***★	0.45 @ 15 A 0.51 @ 30 A	150	125	D^2PAK	—
30	40	T_C = 110°C	***MBRB4030***★	0.46 @ 20 A 0.55 @ 40 A	300	150	D^2PAK	3–193

(1) I_O is total device current capability.
★ New Product

Devices listed in bold, italic are Motorola preferred devices.

Table 6. Axial Lead Schottky Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
20	1	T_A = 55°C $R_{\theta JA}$ = 80°C/W	***1N5817***	0.45 @ 1.0 A	25	125	59-04	3–38
30	1	T_A = 55°C $R_{\theta JA}$ = 80°C/W	***1N5818***	0.55 @ 1.0 A	25	125	59-04	3–38
40	1	T_A = 55°C $R_{\theta JA}$ = 80°C/W	***1N5819***	0.60 @ 1.0 A	25	125	59-04	3–38
60	1	T_A = 55°C $R_{\theta JA}$ = 80°C/W	***MBR160***	0.75 @ 1.0 A	25	150	59-04	3–43
100	1	T_A = 120°C $R_{\theta JA}$ = 50°C/W	***MBR1100***	0.79 @ 1.0 A	50	150	59-04	3–46
20	3	T_A = 76°C $R_{\theta JA}$ = 28°C/W	***1N5820***	0.457 @ 3.0 A	80	125	267-03	3–49
30	3	T_A = 71°C $R_{\theta JA}$ = 28°C/W	***1N5821***	0.500 @ 3.0 A	80	125	267-03	3–49
40	3	T_A = 61°C $R_{\theta JA}$ = 28°C/W	***1N5822***	0.525 @ 3.0 A	80	125	267-03	3–49
40	3	T_A = 65°C $R_{\theta JA}$ = 28°C/W	***MBR340***	0.600 @ 3.0 A	80	150	267-03	3–53
60	3	T_A = 65°C $R_{\theta JA}$ = 28°C/W	***MBR360***	0.740 @ 3.0 A	80	150	267-03	3–53
100	3	T_A = 100°C $R_{\theta JA}$ = 28°C/W	***MBR3100***	0.79 @ 3.0 A	150	150	267-03	3–57
20	5	T_A = 30°C $R_{\theta JA}$ = 25°C/W	***1N5823***	0.360 @ 5.0 A	500	125	60-01	3–60
30	5	T_A = 40°C $R_{\theta JA}$ = 25°C/W	***1N5824***	0.370 @ 5.0 A	500	125	60-01	3–60
40	5	T_A = 45°C $R_{\theta JA}$ = 25°C/W	***1N5825***	0.380 @ 5.0 A	500	125	60-01	3–60

Devices listed in bold, italic are Motorola preferred devices.

Case 221B
(TO–220AC)



Case 221A–06
(TO–220AB)



Case 221E



Case 221D



Table 7. TO–220 Type Schottky Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
45	15	T_C = 105°C	***MBR1545CT***	0.84 @ 15 A	150	150	221A-06	3–64
30	20	T_C = 137°C	***MBR2030CTL*** ★	0.52 @ 10 A 0.58 @ 20 A	150	150	221A-06	3–66
45	20	T_C = 135°C	***MBR2045CT***	0.84 @ 20 A	150	150	221A-06	3–69
60	20	T_C = 133°C	***MBR2060CT***	0.85 @ 10 A 0.95 @ 20 A	150	150	221A-06	3–73
100	20	T_C = 133°C	***MBR20100CT***	0.85 @ 10 A 0.95 @ 20 A	150	150	221A-06	3–73
200	20	T_C = 125°C	***MBR20200CT***	1.0 @ 20 A	150	150	221A-06	3–75
15	25	T_C = 90°C	***MBR2515L*** ★	0.45 @ 25 A	150	100	221A-06	3–77
35	25	T_C = 95°C	***MBR2535CTL*** ★	0.55 @ 25 A	150	125	221A-06	3–78
45	25	T_C = 130°C	***MBR2545CT***	0.82 @ 30 A	150	150	221A-06	3–80
45	30	T_C = 130°C	***MBR3045ST*** ★	0.76 @ 30 A	150	150	221A-06	3–82
45	7.5	T_C = 105°C	***MBR745***	0.84 @ 15 A	150	150	221B	3–84
45	10	T_C = 135°C	***MBR1045***	0.84 @ 20 A	150	150	221B	3–86
60	10	T_C = 133°C	***MBR1060***	0.80 @ 10 A	150	150	221B	3–90
100	10	T_C = 133°C	***MBR10100***	0.80 @ 10 A	150	150	221B	3–90
45	16	T_C = 125°C	***MBR1645***	0.63 @ 16 A	150	150	221B	3–92
45	15	T_C = 105°C	Ⓤ ***MBRF1545CT*** ★	0.84 @ 15 A	150	150	ISOLATED 221D	3–94
45	20	T_C = 135°C	Ⓤ ***MBRF2045CT*** ★	0.84 @ 20 A	150	150	ISOLATED 221D	3–97
60	20	T_C = 133°C	Ⓤ ***MBRF2060CT*** ★	0.95 @ 20 A	150	150	ISOLATED 221D	3–100
100	20	T_C = 133°C	Ⓤ ***MBRF20100CT*** ★	0.95 @ 20 A	150	150	ISOLATED 221D	3–103
200	20	T_C = 125°C	Ⓤ ***MBRF20200CT*** ★	1.0 @ 20 A	150	150	ISOLATED 221D	3–106
45	25	T_C = 125°C	Ⓤ ***MBRF2545CT*** ★	0.82 @ 25 A	150	150	ISOLATED 221D	3–109
45	7.5	T_C = 105°C	***MBRF745*** ★	0.84 @ 15 A	150	150	ISOLATED 221E	3–112
45	10	T_C = 135°C	***MBRF1045*** ★	0.84 @ 20 A	150	150	ISOLATED 221E	3–115

Ⓤ Indicates UL Recognized — File #E69369

★ New Product

Devices listed in bold, italic are Motorola preferred devices.

Case 340D
(TO–218AC)



STYLE 2:
PIN 1. ANODE 1
2. CATHODES
3. ANODE 2
4. CATHODES

Case 340E
(TO–218)

STYLE 1:
PIN 1. CATHODE
3. ANODE
4. CATHODE

Case 340F
(TO–247)



STYLE 2:
PIN 1. ANODE 1
2. CATHODES
3. ANODE 2
4. CATHODES
(BACK HEATSINK)

2

Table 8. TO–218 Types and TO–247 Schottky Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
45	30	T_C = 105°C	***MBR3045PT***	0.76 @ 30 A	200	150	340D	3–119
45	40	T_C = 125°C	***MBR4045PT***	0.70 @ 20 A 0.80 @ 40 A	400	150	340D	3–121
45	60	T_C = 125°C	***MBR6045PT*** ★	0.62 @ 30 A 0.75 @ 60 A	500	150	340D	3–123
25	50	T_C = 125°C	***MBR5025L*** ★	0.54 @ 30 A 0.62 @ 50 A	300	150	340E	3–125
45	30	T_C = 105°C	***MBR3045WT***	0.76 @ 30 A	200	150	340F	3–127
15	40	T_C = 125°C	***MBR4015LWT*** ★	0.42 @ 20 A 0.50 @ 40 A	400	150	340F	3–129
45	40	T_C = 125°C	***MBR4045WT***	0.70 @ 20 A 0.80 @ 40 A	400	150	340F	3–131
45	60	T_C = 125°C	***MBR6045WT*** ★	0.62 @ 30 A 0.75 @ 60 A	500	150	340F	3–133

★ New Product

Devices listed in bold, italic are Motorola preferred devices.

Case 56
(DO–203AA)

STYLE 2:
PIN 1. ANODE
2. CATHODE (CASE)

Case 257
(DO–203AB)



STYLE 2:
PIN 1. ANODE
2. CATHODE (CASE)

Case 11–03
(TO–204AA)



STYLE 4:
PIN 1. ANODE #1
2. ANODE #2
CASE. COMMON CATHODE

Table 9. TO–204AA (formerly TO–3), DO–203AA and DO–203AB (formerly DO–4 and DO–5) Schottky Rectifier Metal Packages DEVICES NOT RECOMMENDED FOR NEW DESIGN

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
20	15	T_C = 85°C (V_R = 4 V)	***1N5826***	0.44 @ 15 A	500	125	56	3–135
30	15	T_C = 85°C (V_R = 6 V)	***1N5827***	0.47 @ 15 A	500	125	56	3–135
40	15	T_C = 85°C (V_R = 8 V)	***1N5828***	0.50 @ 15 A	500	125	56	3–135
20	25	T_C = 85°C (V_R = 4 V)	***1N5829***	0.44 @ 25 A	800	125	56	3–139
30	25	T_C = 85°C (V_R = 6 V)	***1N5830***	0.46 @ 25 A	800	125	56	3–139
40	25	T_C = 85°C (V_R = 8 V)	***1N5831***	0.48 @ 25 A	800	125	56	3–139
30	25	T_C = 70°C	***1N6095***	0.86 @ 78.5 A T_C = 70°C	400	125	56	3–144
40	25	T_C = 70°C	***1N6096***	0.86 @ 78.5 A T_C = 70°C	400	125	56	3–144
45	30	T_C = 105°C	***SD41***	0.55 @ 78.5 A T_C = 125°C	600	150	56	3–144
45	35	T_C = 110°C	***MBR3545***	0.63 @ 35 A	600	150	56	3–148
20	40	T_C = 75°C (V_R = 4 V)	***1N5832***	0.052 @ 40 A	800	125	257	3–152
30	40	T_C = 75°C (V_R = 6 V)	***1N5833***	0.55 @ 40 A	800	125	257	3–152
40	40	T_C = 75°C (V_R = 8 V)	***1N5834***	0.59 @ 40 A	800	125	257	3–152
30	50	T_C = 70°C	***1N6097***	0.86 @ 157 A T_C = 70°C	800	125	257	3–156
40	50	T_C = 70°C	***1N6098***	0.86 @ 157 A T_C = 70°C	800	125	257	3–156
30	60	T_C = 120°C	***MBR6030L***	0.42 @ 30 A 0.48 @ 60 A	1000	150	257	3–160
45	60	T_C = 90°C	***SD51***	0.70 @ 60 A	800	150	257	3–156
45	60	T_C = 100°C	***MBR6045***	0.70 @ 60 A	800	150	257	3–164
45	65	T_C = 120°C	***MBR6545***	0.78 @ 65 A	800	175	257	3–168
45	75	T_C = 90°C	***MBR7545***	0.60 @ 60 A T_C = 125°C	1000	150	257	3–172
45	80	T_C = 120°C	***MBR8045***	0.72 @ 80 A	1000	175	257	3–174
45	30	T_C = 105°C	***MBR3045CT***	0.76 @ 30 A	400	150	11-03	3–178
45	30	T_C = 105°C	***SD241***	0.60 @ 20 A T_C = 125°C	400	150	11-03	3–178

Devices listed in bold, italic are Motorola preferred devices.

Case 357C
POWERTAP™



Cathode = Mounting Plate
Anode = Terminal

SOT–227B



STYLE 2

2

Table 10. POWERTAP II and SOT–227B Schottky Rectifiers

V_{RRM} (Volts)	I_O(1) (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
30	200	T_C = 125°C	***MBRP20030CTL*** ★	0.52 @ 100 A 0.60 @ 200 A	1500	150	357C	3–181
45	200	T_C = 125°C	***MBRP20045CT*** ★	0.78 @ 100 A	1500	175	357C	3–182
60	200	T_C = 125°C	***MBRP20060CT*** ★	0.800 @ 100 A	1500	175	357C	3–182
45	300	T_C = 120°C	***MBRP30045CT*** ★	0.70 @ 150 A 0.82 @ 300 A	2500	175	357C	3–183
60	300	T_C = 120°C	***MBRP30060CT*** ★	0.79 @ 150 A 0.89 @ 300 A	2500	175	357C	3–183
35	600	T_C = 100°C	***MBRP60035CTL*** ★	0.57 @ 300 A	4000	150	357C	3–184
100	80	T_C = 125°C	***MBR240100V*** ★	0.95 @ 40 A	600	150	SOT-227B Style 2	3–185
60	100	T_C = 125°C	***MBR25060V*** ★	0.65 @ 50 A	800	150	SOT-227B Style 2	3–187
45	160	T_C = 125°C	***MBR28045V*** ★	0.80 @ 80 A 1.0 @ 160 A	900	150	SOT-227B Style 2	3–188

(1) I_O is total device current capability.

All POWERTAP devices are being converted to the new, more rugged, POWERTAP II configuration beginning January 1994. Contact your Motorola representative for more details.

All SOT–227B devices have 2500 volts isolation between the heatsink and active elements.

★ New Product

Devices listed in bold, italic are Motorola preferred devices.

Ultrafast Rectifiers

Case 403A
SMB

Cathode = Notch

Case 403
SMC

Cathode = Notch

Case 369A
DPAK
Style 3

Case 418B
D^2PAK
Style 3

"CT" Suffix:



Non–"CT" Suffix:



Table 11. Surface Mount Ultrafast Rectifiers

V_{RRM} (Volts)	I_O[1] (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Package	Page
200	1	T_L = 155°C	***MURS120T3***	35	0.875 @ 1.0 A	40	175	SMB	4–2
600	1	T_L = 150°C	***MURS160T3***	75	1.25 @ 1.0 A	35	175	SMB	4–2
200	3	T_L = 140°C	***MURS320T3***	35	0.875 @ 3.0 A	75	175	SMC	4–5
600	3	T_L = 130°C	***MURS360T3***	75	1.25 @ 3.0 A	75	175	SMC	4–5
200	3	T_L = 158°C	***MURD320***	35	0.95 @ 3.0 A	75	175	DPAK	4–8
200	6	T_L = 145°C	***MURD620CT***	35	1.0 @ 3.0 A	63	175	DPAK	4–11
400	8	T_L = 120°C	***MURHB840CT*** ★	28	2.2 @ 4.0 A	100	175	D^2PAK	4–14
200	16	T_L = 150°C	***MURB1620CT***	35	0.975 @ 8.0 A	100	175	D^2PAK	4–17
600	16	T_L = 150°C	***MURB1660CT***	60	1.5 @ 8.0 A	100	175	D^2PAK	4–20

(1) I_O is total device current capability.
★ New Product

Case 59–04
Plastic

Cathode = Polarity Band

Case 267–03
Plastic

Cathode = Polarity Band

Table 12. Axial Lead Ultrafast Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
200	1	T_A = 130°C $R_{\theta JA}$ = 50°C/W	***MUR120***	25	0.875 @ 1.0 A	35	175	59-04	4–23
400	1	T_A = 120°C $R_{\theta JA}$ = 50°C/W	***MUR140***	50	1.25 @ 1.0 A	35	175	59-04	4–23
600	1	T_A = 120°C $R_{\theta JA}$ = 50°C/W	***MUR160***	50	1.25 @ 1.0 A	35	175	59-04	4–23
1000	1	T_A = 95°C $R_{\theta JA}$ = 50°C/W	***MUR1100E***	75	1.75 @ 1.0 A	35	175	59-04	4–27
200	4	T_A = 80°C $R_{\theta JA}$ = 28°C/W	***MUR420***	25	0.875 @ 3.0 A	125	175	267-03	4–31
400	4	T_A = 40°C $R_{\theta JA}$ = 28°C/W	***MUR440***	50	1.25 @ 3.0 A	70	175	267-03	—
600	4	T_A = 40°C $R_{\theta JA}$ = 28°C/W	***MUR460***	50	1.25 @ 3.0 A	70	175	267-03	4–31
1000	4	T_A = 35°C $R_{\theta JA}$ = 28°C/W	***MUR4100E***	75	1.75 @ 3.0 A	70	175	267-03	4–35

Devices listed in bold, italic are Motorola preferred devices.

Case 221B
(TO–220AC)



Case 221A–06
(TO–220AB)

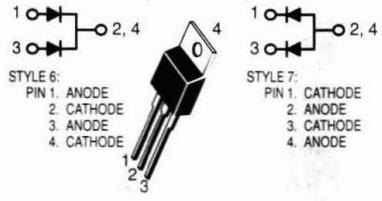

Case 221E



Case 221D



2

Table 13. TO–220 Type Ultrafast Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
200	6	T_C = 130°C	***MUR620CT***	35	0.975 @ 3.0 A	75	175	221A-06	4–39
400	8	T_C = 120°C	***MURH840CT***	28	2.0 @ 4.0 A	100	175	221A-06	4–41
600	8	T_C = 120°C	***MURH860CT***	35	2.8 @ 4.0 A	100	175	221A-06	4–44
200	16	T_C = 150°C	***MUR1620CT***	35	0.975 @ 8.0 A	100	175	221A-06	4–46
200	16	T_C = 160°C	***MUR1620CTR***	85	1.2 @ 8.0 A	100	175	221A-06	4–51
400	16	T_C = 150°C	***MUR1640CT***	60	1.30 @ 8.0 A	100	175	221A-06	4–46
600	16	T_C = 150°C	***MUR1660CT***	60	1.5 @ 8.0 A	100	175	221A-06	4–46
1500	5	T_C = 125°C	***MUR5150E***	175	2.4 @ 5.0 A	100	125	221B	4–54
200	8	T_C = 150°C	***MUR820***	35	0.975 @ 8.0 A	100	175	221B	4–56
400	8	T_C = 150°C	***MUR840*** ★	50	1.30 @ 8.0 A	100	175	221B	4–56
600	8	T_C = 150°C	***MUR860*** ★	50	1.50 @ 8.0 A	100	175	221B	4–56
800	8	T_C = 175°C	***MUR880E***	75	1.80 @ 8.0 A	100	175	221B	—
1000	8	T_C = 150°C	***MUR8100E***	75	1.80 @ 8.0 A	100	175	221B	4–61
1200	10	T_C = 125°C	***MUR10120E***	175	2.2 @ 6.5 A	100	125	221B	4–65
1500	10	T_C = 125°C	***MUR10150E***	175	2.4 @ 6.5 A	100	125	221B	4–68
200	15	T_C = 150°C	***MUR1520***	35	1.05 @ 15 A	200	175	221B	4–71
400	15	T_C = 150°C	***MUR1540***	60	1.25 @ 15 A	150	175	221B	4–71
600	15	T_C = 145°C	***MUR1560***	60	1.50 @ 15 A	150	175	221B	4–71
200	8	T_C = 150°C	***MURF820*** ★	25	0.975 @ 8.0 A	100	150	ISOLATED 221E	4–76
200	16	T_C = 150°C	***MURF1620CT*** ★	25	0.975 @ 8.0 A	100	150	ISOLATED 221D	4–79
600	16	T_C = 150°C	***MURF1660CT*** ★	50	1.50 @ 8.0 A	100	150	ISOLATED 221D	4–82

Ⓤ Indicates UL Recognized — File #E69369

★ New Product

Devices listed in bold, italic are Motorola preferred devices.

Case 340D
(TO–218AC)



Case 340E
(TO–218)



Case 340F
(TO–247)

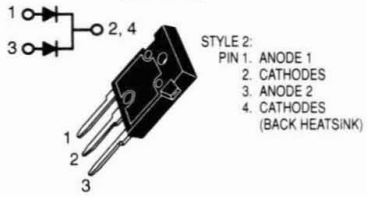

Table 14. TO–218 Types and TO–247 Ultrafast Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
200	30	T_C = 145°C	***MUR3020WT***	35	1.05 @ 15 A	150	175	340F	4–85
400	30	T_C = 145°C	***MUR3040WT***	60	1.25 @ 15 A	150	175	340F	4–85
600	30	T_C = 145°C	***MUR3060WT***	60	1.70 @ 15 A	150	175	340F	4–85
200	30	T_C = 150°C	***MUR3020PT***	35	1.12 @ 15 A	200	175	340D	4–90
400	30	T_C = 150°C	***MUR3040PT***	60	1.12 @ 15 A	150	175	340D	4–90
600	30	T_C = 145°C	***MUR3060PT***	60	1.20 @ 15 A	150	175	340D	4–90
400	30	T_C = 70°C	***MUR3040*** ★	100	1.5 @ 30 A	300	175	340E	4–95
800	30	T_C = 70°C	***MUR3080*** ★	110	1.90 @ 30 A	300	175	340E	4–97
400	60	T_C = 70°C	***MUR6040***	100	1.50 @ 60 A	600	175	340E	4–98

★ New Product

Case 357C
POWERTAP™



Cathode = Mounting Plate
Anode = Terminal

SOT–227B

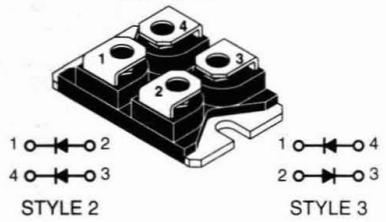

Table 15. POWERTAP II and SOT–227B Ultrafast Rectifiers

V_{RRM} (Volts)	I_O(1) (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
400	60	T_C = 60°C	***BYT230PIV-400M*** ★ Ⓤ	100	1.5 @ 30 A	200	150	SOT-227B Style 3	4–100
1000	60	T_C = 50°C	***BYT230PIV-1000M*** ★ Ⓤ	165	1.9 @ 30 A	200	150	SOT-227B Style 3	4–104
400	120	T_C = 80°C	***BYT261PIV-400M*** ★ Ⓤ	100	1.5 @ 60 A	600	150	SOT-227B Style 2	4–108
1000	120	T_C = 60°C	***BYT261PIV-1000M*** ★ Ⓤ	170	1.9 @ 60 A	400	150	SOT-227B Style 2	4–112
200	200	T_C = 130°C	***MURP20020CT*** ★	50	1.00 @ 100 A	800	175	357C	4–116
400	200	T_C = 100°C	***MURP20040CT*** ★	50	1.30 @ 100 A	800	175	357C	4–116

(1) I_O is total device current capability.

All POWERTAP devices are being converted to the new, more rugged, POWERTAP II configuration beginning January 1994. Contact your Motorola representative for more details.

All SOT–227B devices have 2500 volts isolation between the heatsink and active elements.

Ⓤ Indicates UL Recognized — File #E69369

★ New Product

Devices listed in bold, italic are Motorola preferred devices.

Fast Recovery Rectifiers/General–Purpose Rectifiers

Axial lead Fast Recovery Rectifiers having maximum switching times of 200 ns and low cost general purpose rectifiers are listed in the table below.

Case 59–03
Plastic

Cathode = Polarity Band

Case 267–03
Plastic

Cathode = Polarity Band

Case 194–04
Plastic

Cathode indicated by diode symbol

Case 193–04
Plastic(10)

Cathode = Polarity Band

Case 221B
(TO–220AC)

STYLE 1:
PIN 1. CATHODE
2. N/A
3. ANODE
4. CATHODE



Case 1–07
(TO–204AA)
Metal



Table 16. Fast Recovery Rectifiers/General Purpose Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_J = 25°C (Volts)	Max t_{rr} (ns)	I_{FSM} (Amperes)	T_J Max (°C)	Case	Page
400	1	T_A = 75°C	***1N4004***	1.1 @ 1.0 A	—	30	150	59-03(3)	5–2
1000	1	T_A = 75°C	***1N4007***	1.1 @ 1.0 A	—	30	150	59-03(3)	5–2
200	1	T_A = 75°C	***1N4935***	1.2 @ 3.14 A T_J = 125°C	200	30	150	59-03(3)	5–3
600	1	T_A = 75°C	***1N4937***	1.2 @ 3.14 A T_J = 125°C	200	30	150	59-03(3)	5–3
400	3	T_L = 105°C	***1N5404***	1.2 @ 9.4 A	—	200	150	267-03	5–5
600	3	T_L = 105°C	***1N5406***	1.2 @ 9.4 A	—	200	150	267-03	5–5
200	3	T_A = 80°C(8)	***MR852***	1.25 @ 3.0 A	200	100	150	267-03	5–6
600	3	T_A = 80°C(8)	***MR856***	1.25 @ 3.0 A	200	100	150	267-03	5–6
400	6	T_A = 60°C $R_{\theta JA}$ = 25°C/W	***MR754***	1.25 @ 100 A	—	400	175	194-04	5–8
1000	6	T_A = 60°C $R_{\theta JA}$ = 25°C/W	***MR760***	1.25 @ 100 A	—	400	175	194-04	5–8
400	25	T_C = 150°C	***MR2504***	1.18 @ 78.5 A	—	400	175	193-04	5–12
1000	25	T_C = 150°C	***MR2510***	1.18 @ 78.5 A	—	400	175	193-04	5–12
100	30	T_C = 125°C	***MR4422CTR***	1.2 @ 15 A	—	400	150	1-07 Style 8	5–18
100	30	T_C = 125°C	***MR4422CT***	1.2 @ 15 A	—	400	150	1-07 Style 9	5–18
20	35	T_C = 150°C	***MR2535L(11)***	1.1 @ 100 A	—	400	175	194-04	5–19

(3) Package Size: 0.120″ max diameter by 0.260″ length.
(8) Must be derated for reverse power dissipation. See data sheet.
(10) Request data sheet for mounting information.
(11) Overvoltage Transient Suppressor: 24 – 32 volts avalanche voltage.

Devices listed in bold, italic are Motorola preferred devices.

Section 3

Schottky Data Sheets

Surface Mount Schottky Power Rectifier

Plastic SOD–123 Package

MBR0520LT1
MBR0520LT3
Motorola Preferred Devices

SCHOTTKY BARRIER RECTIFIER 0.5 AMPERES 20 VOLTS

CASE 425–04, Style 1 SOD–123

The Schottky Power Rectifier employs the Schottky Barrier principle with a barrier metal that produces optimal forward voltage drop–reverse current tradeoff. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes in surface mount applications where compact size and weight are critical to the system. This package provides an alternative to the leadless 34 MELF style package. These state–of–the–art devices have the following features:

- Guardring for Stress Protection
- Very Low Forward Voltage (0.38 V Max @ 0.5 A, 25°C)
- 125°C Operating Junction Temperature
- Epoxy Meets UL94, VO at 1/8″
- Package Designed for Optimal Automated Board Assembly

3

Mechanical Characteristics

- Reel Options: MBR0520LT1 = 3,000 per 7″ reel/8 mm tape.
  MBR0520LT3 = 10,000 per 13″ reel/8 mm tape.
- Device Marking: B2
- Polarity Designator: Cathode Band
- Weight: 11.7 mg (approximately)
- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	Volts
Average Rectified Forward Current (Rated V_R) T_L = 90°C	$I_{F(AV)}$	0.5	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	5.5	Amps
Storage Temperature	T_{stg}	–65 to +125	°C
Operating Junction Temperature	T_J	–65 to +125	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	V/μs

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Ambient (1)	$R_{\theta JA}$	340	°C/W
Thermal Resistance — Junction to Lead	$R_{\theta JL}$	150	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (2) (i_F = 0.1 Amps) (i_F = 0.5 Amps)	V_F	T_J = 25°C 0.300 0.385	T_J = 100°C 0.220 0.330	Volts
Maximum Instantaneous Reverse Current (2) (V_R = 10 V) (Rated dc Voltage = 20 V)	I_R	T_J = 25°C 75 μA 250 μA	T_J = 100°C 5 mA 8 mA	mA

(1) FR–4 or FR–5 = 3.5 x 1.5 inches using the Motorola minimum recommended footprint.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 2

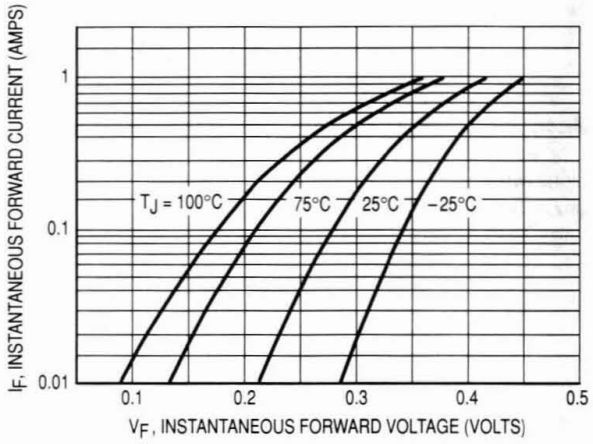

Figure 1. Typical Forward Voltage

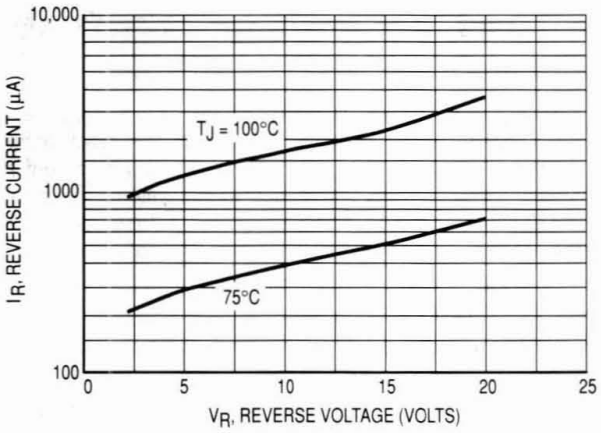

Figure 2. Typical Reverse Current

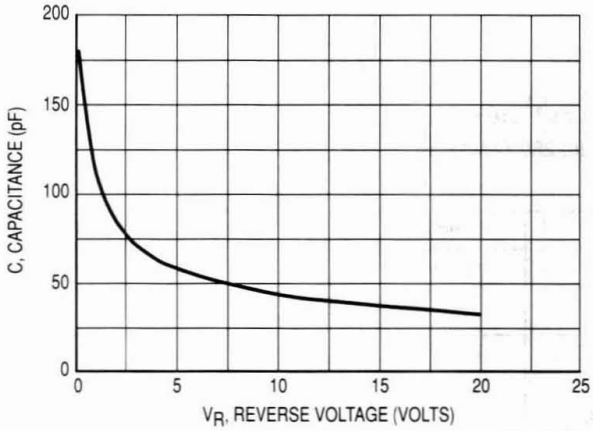

Figure 3. Typical Capacitance

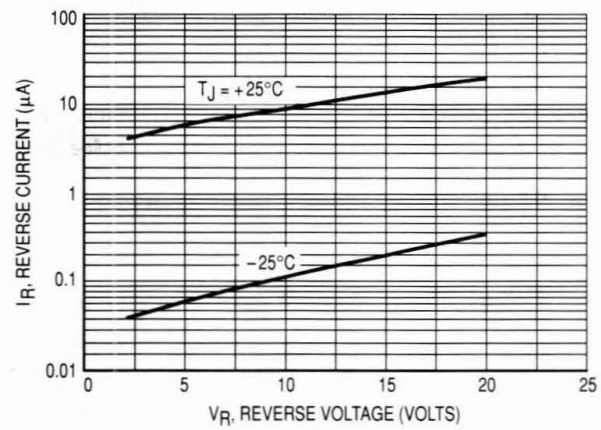

Figure 4. Typical Reverse Current

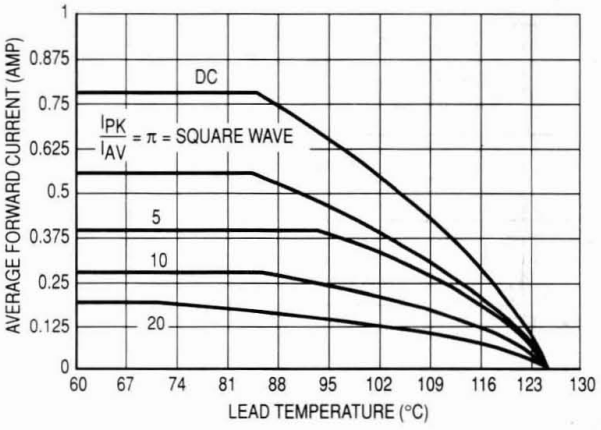

Figure 5. Current Derating (Lead)

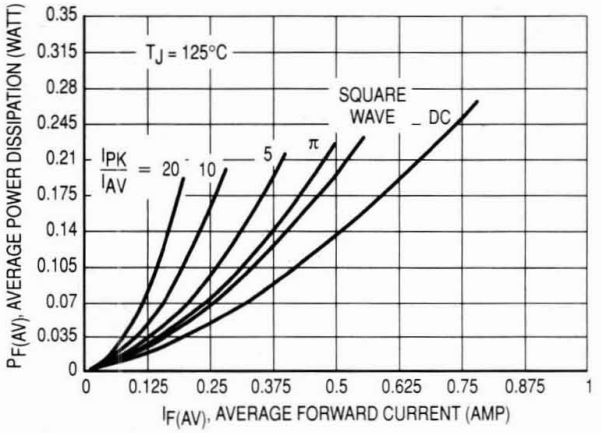

Figure 6. Power Dissipation

Surface Mount Schottky Power Rectifier

Plastic SOD–123 Package

MBR0530T1
MBR0530T3
Motorola Preferred Devices

SCHOTTKY BARRIER RECTIFIER 0.5 AMPERES 30 VOLTS

. . . using the Schottky Barrier principle with a large area metal–to–silicon power diode. Ideally suited for low voltage, high frequency rectification or as free wheeling and polarity protection diodes in surface mount applications where compact size and weight are critical to the system. This package also provides an easy to work with alternative to leadless 34 package style. These state–of–the–art devices have the following features:

- Guardring for Stress Protection
- Low Forward Voltage
- 125°C Operating Junction Temperature
- Epoxy Meets UL94, VO at 1/8″
- Package Designed for Optimal Automated Board Assembly

CASE 425–04
SOD–123

3

Mechanical Characteristics

- Reel Options: MBR0530T1 = 3,000 per 7″ reel/8 mm tape
  MBR0530T3 = 10,000 per 13″ reel/8 mm tape
- Device Marking: B3
- Polarity Designator: Cathode Band
- Weight: 11.7 mg (approximately)
- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30	Volts
Average Rectified Forward Current (Rated V_R) T_L = 100°C	$I_{F(AV)}$	0.5	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	5.5	Amps
Storage Temperature	T_{stg}	–65 to +125	°C
Operating Junction Temperature	T_J	–65 to +125	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	V/μs

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Ambient (1)	$R_{\theta JA}$	340	°C/W
Thermal Resistance — Junction to Lead (1)	$R_{\theta JL}$	150	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (2) (i_F = 0.1 Amps, T_J = 25°C) (i_F = 0.5 Amps, T_J = 25°C)	V_F	 0.375 0.43	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = 25°C) (V_R = 15 V, T_C = 25°C)	I_R	 130 20	μA

(1) FR–4 or FR–5 = 3.5 x 1.5 inches using the Motorola minimum recommended footprint.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

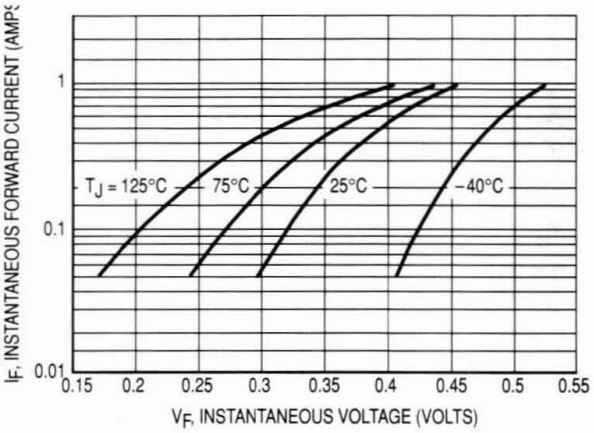

Figure 1. Typical Forward Voltage

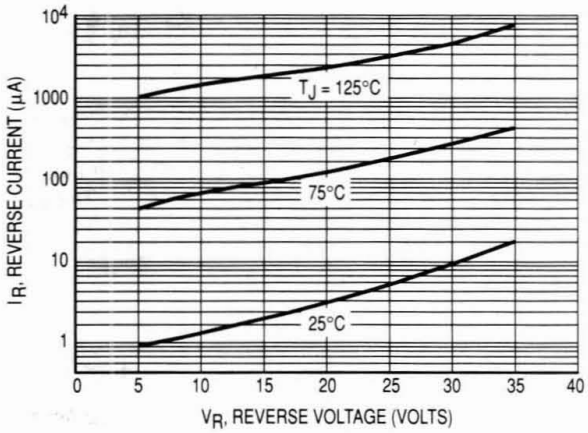

Figure 2. Typical Reverse Current

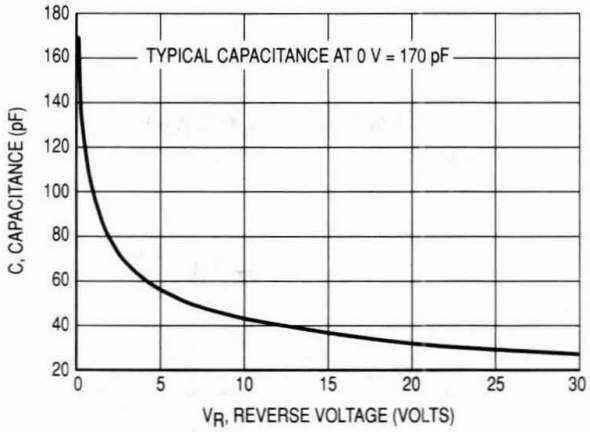

Figure 3. Typical Capacitance

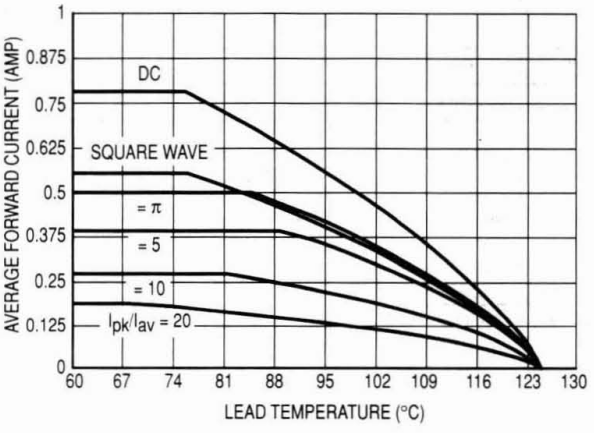

Figure 4. Current Derating (Lead)

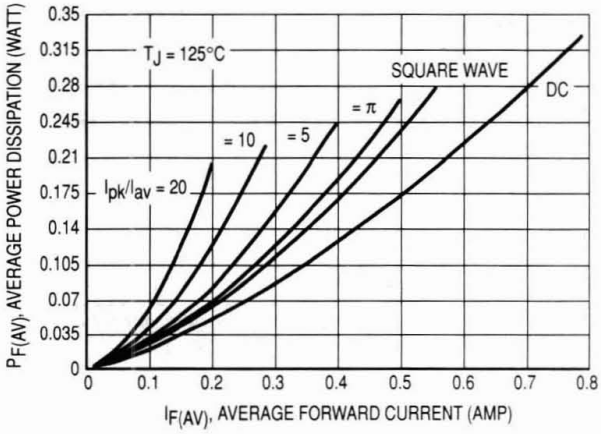

Figure 5. Power Dissipation

Surface Mount Schottky Power Rectifier

Plastic SOD–123 Package

MBR0540T1
MBR0540T3
Motorola Preferred Devices

SCHOTTKY BARRIER RECTIFIER 0.5 AMPERES 40 VOLTS

CASE 425–04
SOD–123

. . . using the Schottky Barrier principle with a large area metal–to–silicon power diode. Ideally suited for low voltage, high frequency rectification or as free wheeling and polarity protection diodes in surface mount applications where compact size and weight are critical to the system. This package also provides an easy to work with alternative to leadless 34 package style. These state–of–the–art devices have the following features:

- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Epoxy Meets UL94, VO at 1/8″
- Package Designed for Optimal Automated Board Assembly

Mechanical Characteristics

- Reel Options: MBR0540T1 = 3,000 per 7″ reel/8 mm tape
  MBR0540T3 = 10,000 per 13″ reel/8 mm tape
- Device Marking: B4
- Polarity Designator: Cathode Band
- Weight: 11.7 mg (approximately)
- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	40	Volts
Average Rectified Forward Current (Rated V_R) T_L = 100°C	$I_{F(AV)}$	0.5	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	5.5	Amps
Storage Temperature	T_{stg}	−65 to +150	°C
Operating Junction Temperature	T_J	−65 to +150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	V/μs

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Ambient (1)	$R_{\theta JA}$	340	°C/W
Thermal Resistance — Junction to Lead (1)	$R_{\theta JL}$	150	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (2) (i_F = 0.5 Amps, T_J = 25°C)	V_F	0.51	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = 25°C) (V_R = 20 V, T_C = 25°C)	I_R	 20 10	μA

(1) FR–4 or FR–5 = 3.5 x 1.5 inches using the Motorola minimum recommended footprint.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

Designer's™ Data Sheet

Schottky Power Rectifier Surface Mount Power Package

MBRS130LT3

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 1.0 AMPERE 30 VOLTS

CASE 403A–03

. . . Employs the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes, in surface mount applications where compact size and weight are critical to the system.

- Very Low Forward Voltage Drop (0.395 Volts Max @ 1.0 A, T_J = 25°C)
- Small Compact Surface Mountable Package with J–Bend Leads
- Highly Stable Oxide Passivated Junction
- Guardring for Stress Protection

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 95 mg (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped in 12 mm Tape and Reel, 2500 units per reel
- Polarity: Notch in Plastic Body Indicates Cathode Lead
- Marking: B130

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	30	Volts
Average Rectified Forward Current	T_L = 120°C T_L = 110°C	$I_{F(AV)}$	1.0 2.0	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	40	Amps
Operating Junction Temperature		T_J	– 65 to +125	°C

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Lead (T_L = 25°C)	$R_{\theta JL}$	12	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 1.0 A, T_J = 25°C) (i_F = 2.0 A, T_J = 25°C)	V_F	 0.395 0.445	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 25°C) (Rated dc Voltage, T_J = 100°C)	I_R	 1.0 10	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

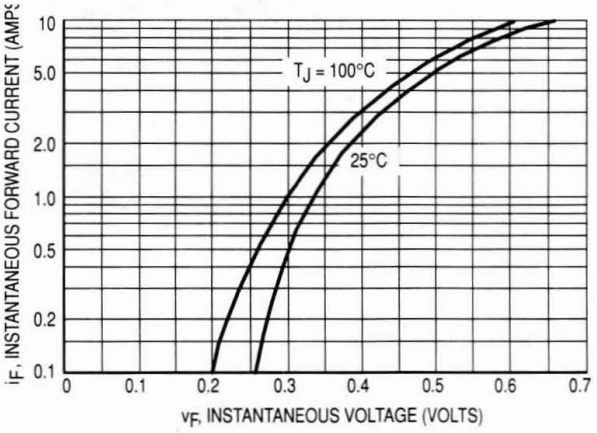

Figure 1. Typical Forward Voltage

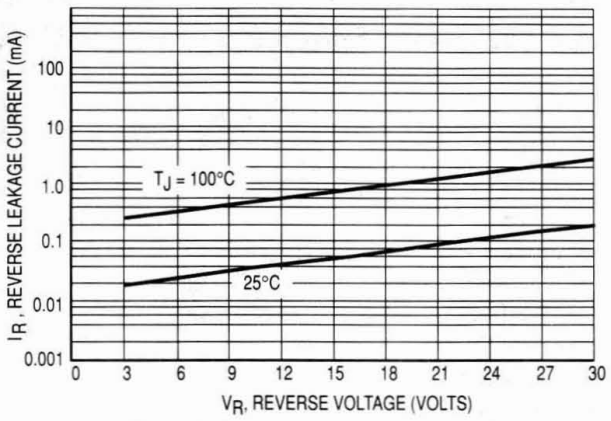

Figure 2. Typical Reverse Leakage Current

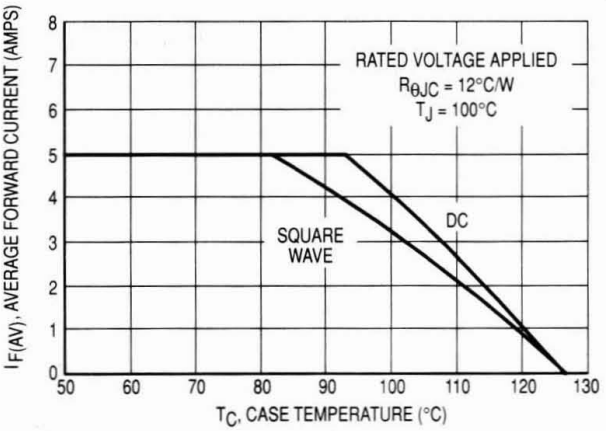

Figure 3. Current Derating (Case)

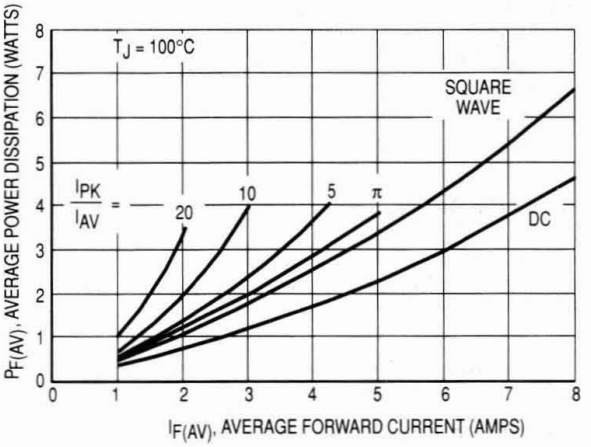

Figure 4. Typical Power Dissipation

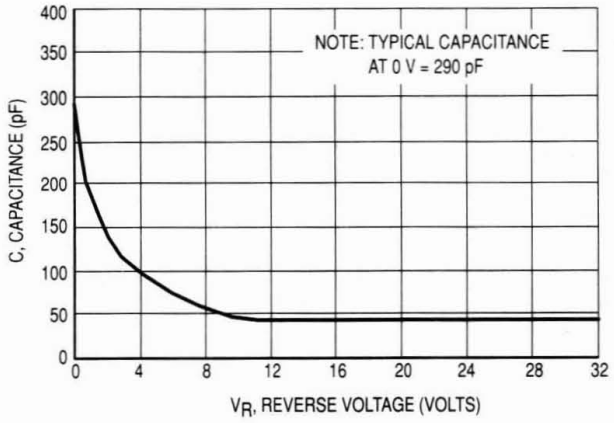

Figure 5. Typical Capacitance

Surface Mount Schottky Power Rectifier

MBRS140T3

Motorola Preferred Device

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes in surface mount applications where compact size and weight are critical to the system.

- Small Compact Surface Mountable Package with J-Bend Leads
- Rectangular Package for Automated Handling
- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop (0.55 Volts Max @ 1.0 A, T_J = 25°C)
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 95 mg (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped in 12 mm Tape and Reel, 2500 units per reel
- Polarity: Notch in Plastic Body Indicates Cathode Lead
- Marking: B140

SCHOTTKY BARRIER RECTIFIERS 1.0 AMPERE 40 VOLTS

CASE 403A-03

3

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	40	Volts
Average Rectified Forward Current (T_L = 115°C)	$I_{F(AV)}$	1	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	40	Amps
Operating Junction Temperature	T_J	−65 to +125	°C

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Lead (T_L = 25°C)	$R_{\theta JL}$	12	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 1.0 A, T_J = 25°C)	v_F	0.6	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 25°C) (Rated dc Voltage, T_J = 100°C)	i_R	 1.0 10	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 2

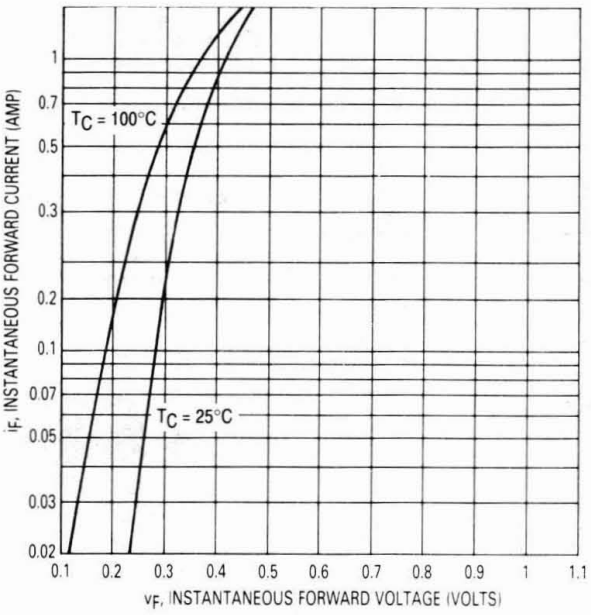

Figure 1. Typical Forward Voltage

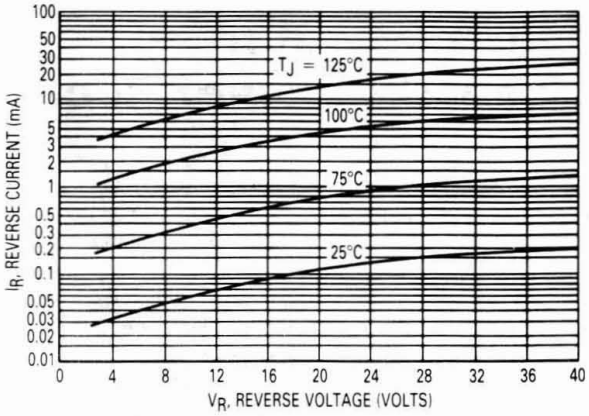

Figure 2. Typical Reverse Current

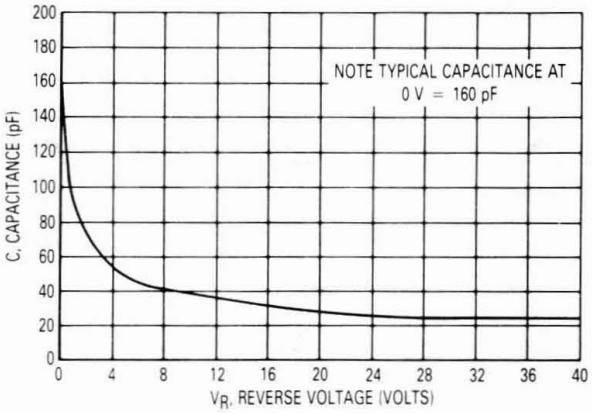

Figure 3. Typical Capacitance

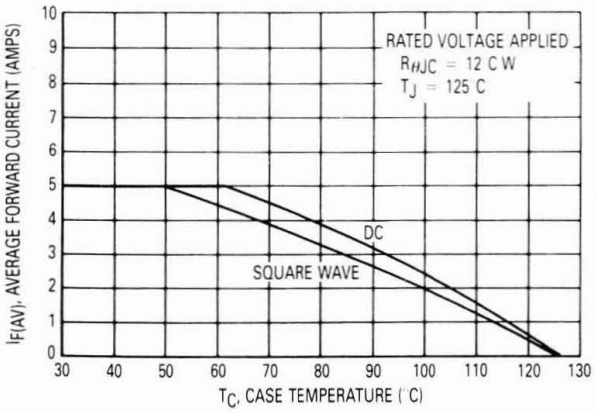

Figure 4. Current Derating (Case)

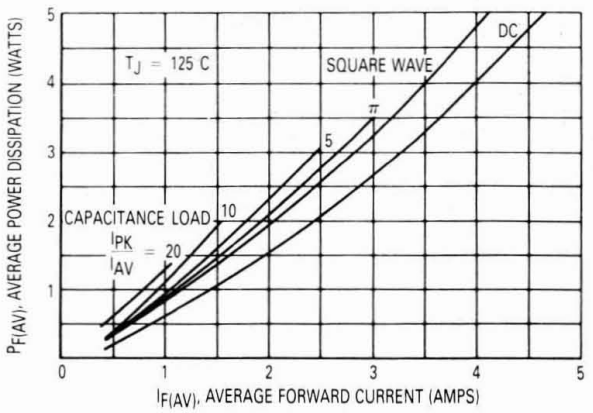

Figure 5. Power Dissipation

Designer's™ Data Sheet
Schottky Power Rectifier
Surface Mount Power Package

MBRS1100T3

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 1.0 AMPERE 100 VOLTS

CASE 403A-03

Schottky Power Rectifiers employ the use of the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes, in surface mount applications where compact size and weight are critical to the system. These state-of-the-art devices have the following features:

- Small Compact Surface Mountable Package with J-Bend Leads
- Rectangular Package for Automated Handling
- Highly Stable Oxide Passivated Junction
- High Blocking Voltage — 100 Volts
- 150°C Operating Junction Temperature
- Guardring for Stress Protection

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 95 mg (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped in 12 mm Tape and Reel, 2500 units per reel
- Polarity: Notch in Plastic Body Indicates Cathode Lead
- Marking: B110

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	100	Volts
Average Rectified Forward Current	T_L = 120°C T_L = 100°C	$I_{F(AV)}$	1.0 2.0	Amps
Non-repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	50	Amps
Operating Junction Temperature		T_J	−65 to +150	°C
Voltage Rate of Change		dv/dt	10	V/ns

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Lead (T_L = 25°C)	$R_{\theta JL}$	22	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 1.0 A, T_J = 25°C)	v_F	0.75	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 25°C) (Rated dc Voltage, T_J = 100°C)	i_R	 0.5 5.0	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%

Preferred devices are Motorola recommended choices for future use and best overall value.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Rev 2

TYPICAL ELECTRICAL CHARACTERISTICS

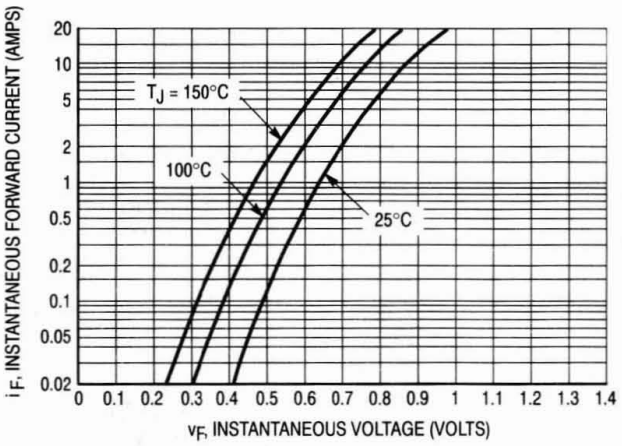

Figure 1. Typical Forward Voltage

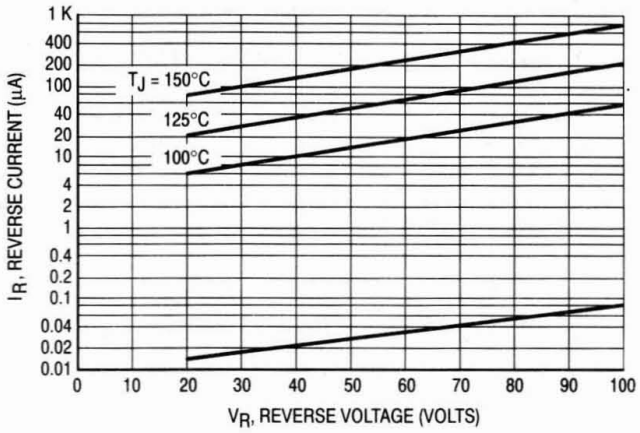

Figure 2. Typical Reverse Current

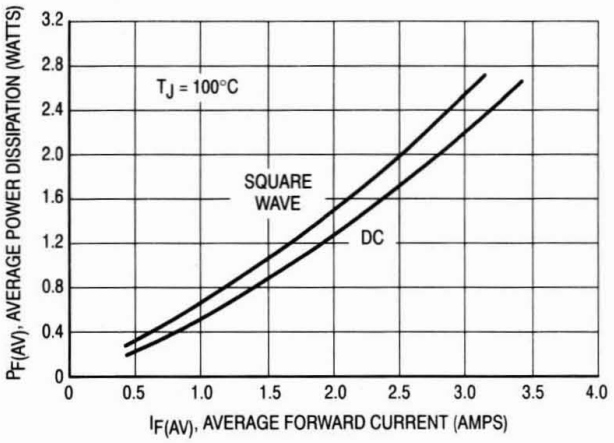

Figure 3. Power Dissipation

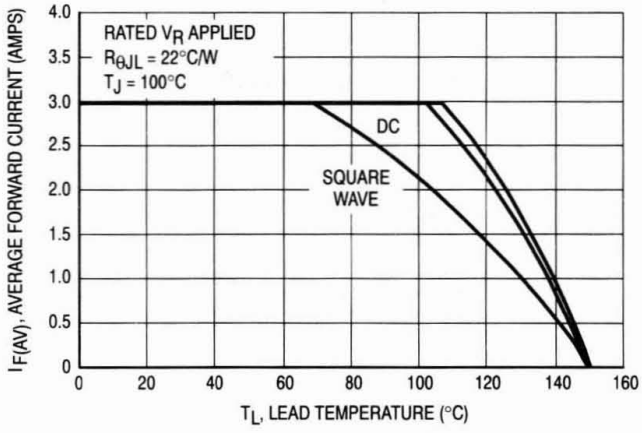

Figure 4. Current Derating, Lead

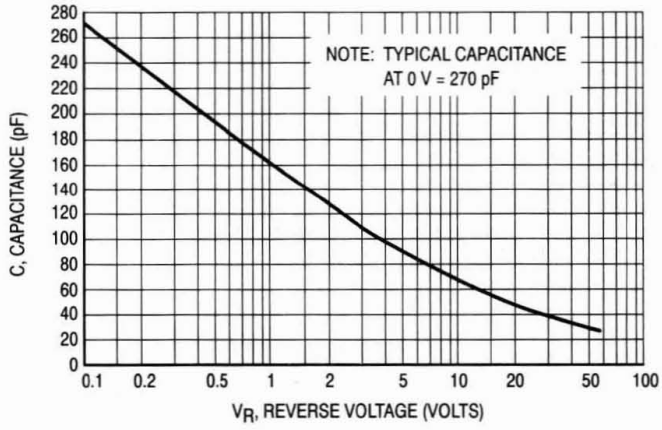

Figure 5. Typical Capacitance

Surface Mount Schottky Power Rectifier

MBRS340T3
MBRS360T3

Motorola Preferred Device

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes, in surface mount applications where compact size and weight are critical to the system.

- Small Compact Surface Mountable Package with J-Bend Leads
- Rectangular Package for Automated Handling
- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop (0.5 Volts Max @ 3.0 A, T_J = 25°C)
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 217 mg (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped in 16 mm Tape and Reel, 2500 units per reel
- Polarity: Notch in Plastic Body Indicates Cathode Lead
- Marking: B34, B36

SCHOTTKY BARRIER RECTIFIERS 3.0 AMPERES 40, 60 VOLTS

CASE 403-03

3

MAXIMUM RATINGS

Rating	Symbol	MBRS340T3	MBRS360T3	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	40	60	Volts
Average Rectified Forward Current	$I_{F(AV)}$	3.0 @ T_L = 100°C 4.0 @ T_L = 90°C		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	80		Amps
Operating Junction Temperature	T_J	−65 to +125		°C

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Lead	$R_{\theta JL}$	11	11	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 3.0 A, T_J = 25°C)	v_F	0.525	0.740	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 25°C) (Rated dc Voltage, T_J = 100°C)	I_R	2.0 20	0.5 20	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 2

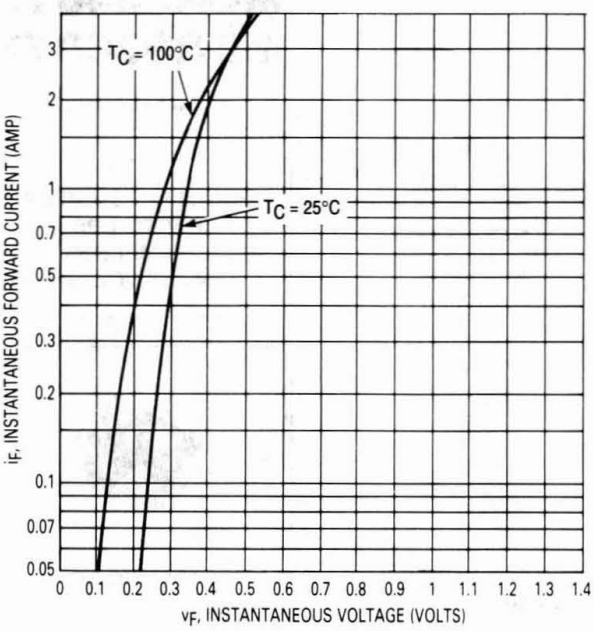

Figure 1. Typical Forward Voltage

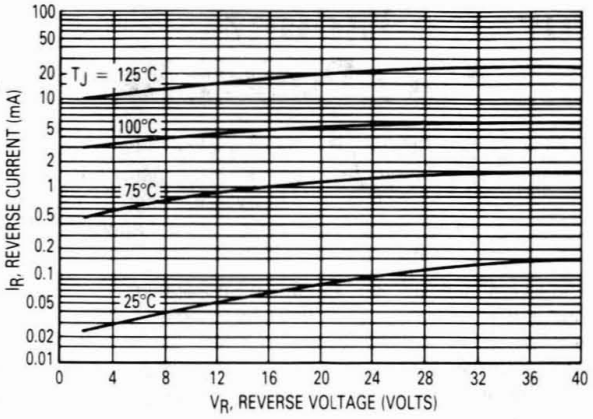

Figure 2. Typical Reverse Current

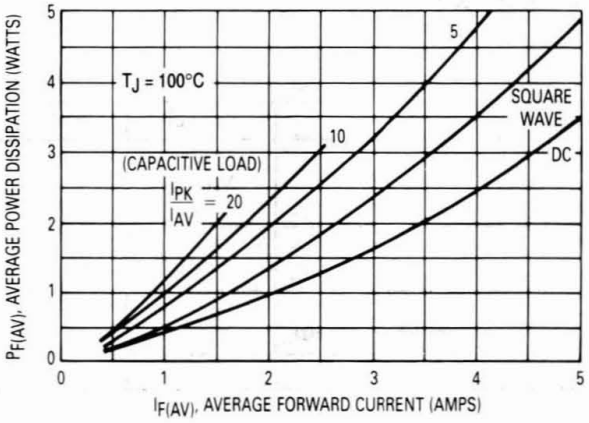

Figure 3. Power Dissipation

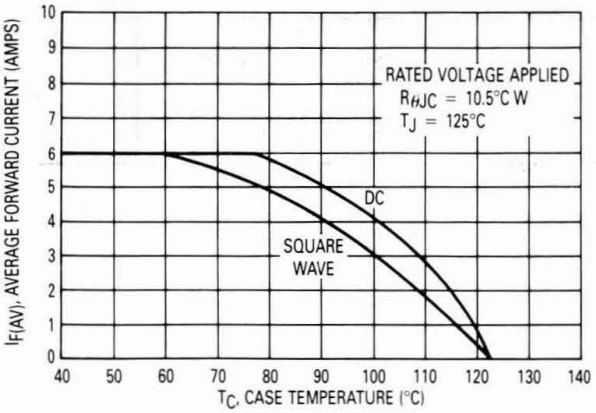

Figure 4. Current Derating (Case)

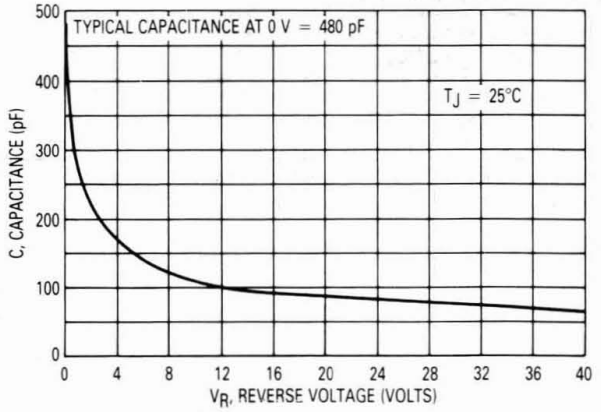

Figure 5. Typical Capacitance

SWITCHMODE Power Rectifiers

DPAK Surface Mount Package

. . . designed for use as output rectifiers, free wheeling, protection and steering diodes in switching power supplies, inverters and other inductive switching circuits. These state-of-the-art devices have the following features:

- Extremely Fast Switching
- Extremely Low Forward Drop
- Platinum Barrier with Avalanche Guardrings
- Guaranteed Reverse Avalanche

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 75 units per plastic tube
- Available in 16 mm Tape and Reel, 2500 units per reel, by adding a "T4" suffix to the part number
- Marking: B320, B330, B340, B350, B360

MBRD320
MBRD330
MBRD340
MBRD350
MBRD360

MBRD320, MBRD340 and MBRD360 are Motorola Preferred Devices

SCHOTTKY BARRIER RECTIFIERS 3 AMPERES 20 TO 60 VOLTS

3

CASE 369A-13
PLASTIC

MAXIMUM RATINGS

Rating	Symbol	MBRD					Unit
		320	330	340	350	360	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	50	60	Volts
Average Rectified Forward Current (T_C = +125°C, Rated V_R)	$I_{F(AV)}$	3					Amps
Peak Repetitive Forward Current, T_C = +125°C (Rated V_R, Square Wave, 20 kHz)	I_{FRM}	6					Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	75					Amps
Peak Repetitive Reverse Surge Current (2 μs, 1 kHz)	I_{RRM}	1					Amp
Operating Junction Temperature	T_J	−65 to +150					°C
Storage Temperature	T_{stg}	−65 to +175					°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000					V/μs

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	6	°C/W
Maximum Thermal Resistance, Junction to Ambient (1)	$R_{\theta JA}$	80	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (2) i_F = 3 Amps, T_C = +25°C i_F = 3 Amps, T_C = +125°C i_F = 6 Amps, T_C = +25°C i_F = 6 Amps, T_C = +125°C	v_F	 0.6 0.45 0.7 0.625	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = +25°C) (Rated dc Voltage, T_C = +125°C)	i_R	 0.2 20	mA

(1) Rating applies when surface mounted on the minimum pad size recommended.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

TYPICAL CHARACTERISTICS

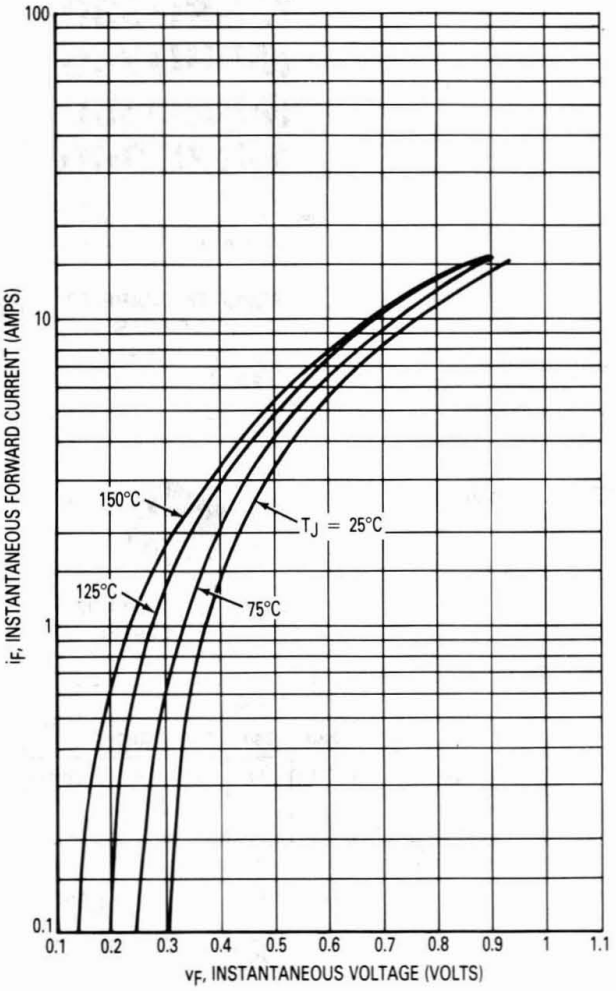

Figure 1. Typical Forward Voltage

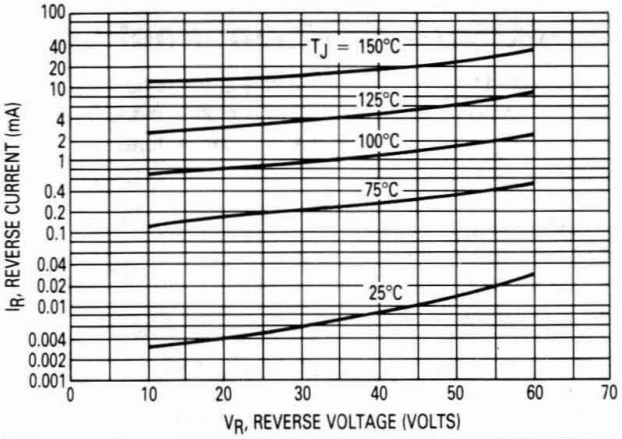

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these curves if V_R is sufficient below rated V_R.

Figure 2. Typical Reverse Current

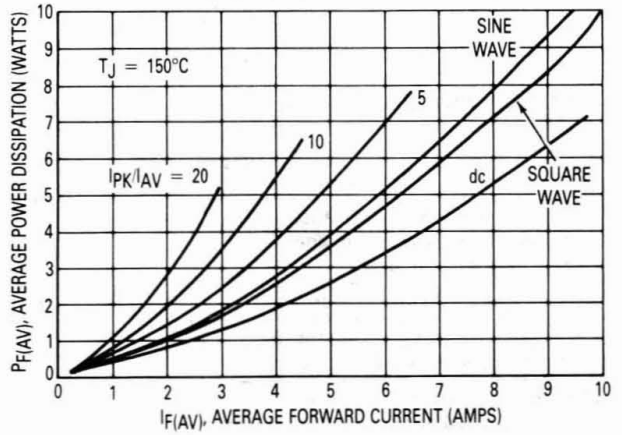

Figure 3. Average Power Dissipation

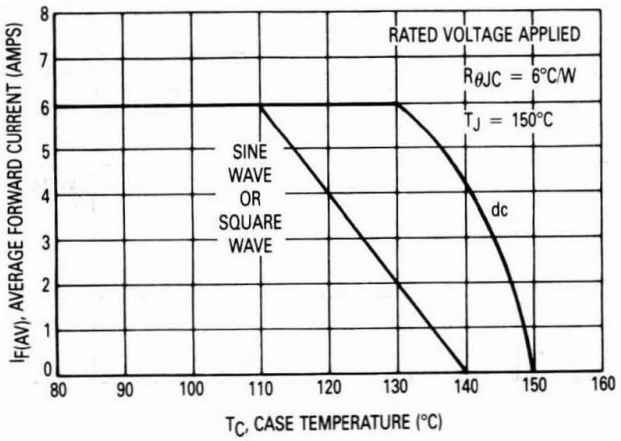

Figure 4. Current Derating, Case

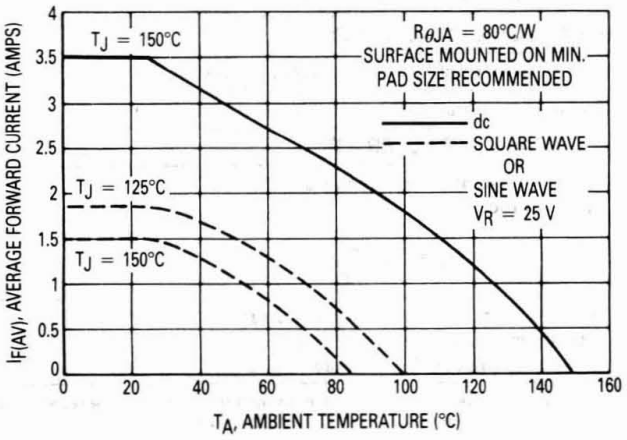

Figure 5. Current Derating, Ambient

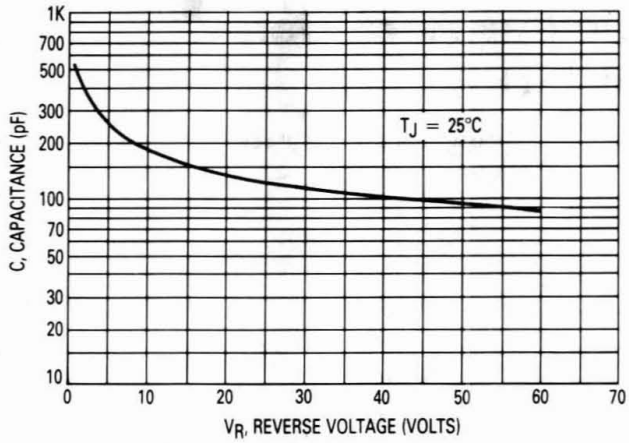

Figure 6. Typical Capacitance

SWITCHMODE Power Rectifiers

DPAK Surface Mount Package

MBRD620CT
MBRD630CT
MBRD640CT
MBRD650CT
MBRD660CT

MBRD620CT, MBRD640CT and MBRD660CT are Motorola Preferred Devices

. . . in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Extremely Fast Switching
- Extremely Low Forward Drop
- Platinum Barrier with Avalanche Guardrings
- Guaranteed Reverse Avalanche

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 75 units per plastic tube
- Available in 16 mm Tape and Reel, 2500 units per reel, by adding a "T4" suffix to the part number
- Marking: B620T, B630T, B640T, B650T, B660T

SCHOTTKY BARRIER RECTIFIERS 6 AMPERES 20 TO 60 VOLTS





CASE 369A-13 PLASTIC

MAXIMUM RATINGS

Rating	Symbol	MBRD 620CT	630CT	640CT	650CT	660CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	50	60	Volts
Average Rectified Forward Current (Per Diode / Per Device) T_C = 130°C (Rated V_R)	$I_{F(AV)}$	3 6					Amps
Peak Repetitive Forward Current, T_C = 130°C (Rated V_R, Square Wave, 20 kHz) Per Diode	I_{FRM}	6					Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	75					Amps
Peak Repetitive Reverse Surge Current (2 μs, 1 kHz)	I_{RRM}	1					Amp
Operating Junction Temperature	T_J	−65 to +150					°C
Storage Temperature	T_{stg}	−65 to +175					°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000					V/μs

THERMAL CHARACTERISTICS PER DIODE

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	6	°C/W
Maximum Thermal Resistance, Junction to Ambient (1)	$R_{\theta JA}$	80	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Maximum Instantaneous Forward Voltage (2) i_F = 3 Amps, T_C = 25°C i_F = 3 Amps, T_C = 125°C i_F = 6 Amps, T_C = 25°C i_F = 6 Amps, T_C = 125°C	v_F	 0.7 0.65 0.9 0.85	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = 25°C) (Rated dc Voltage, T_C = 125°C)	i_R	 0.1 15	mA

(1) Rating applies when surface mounted on the minimum pad size recommended.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

TYPICAL CHARACTERISTICS

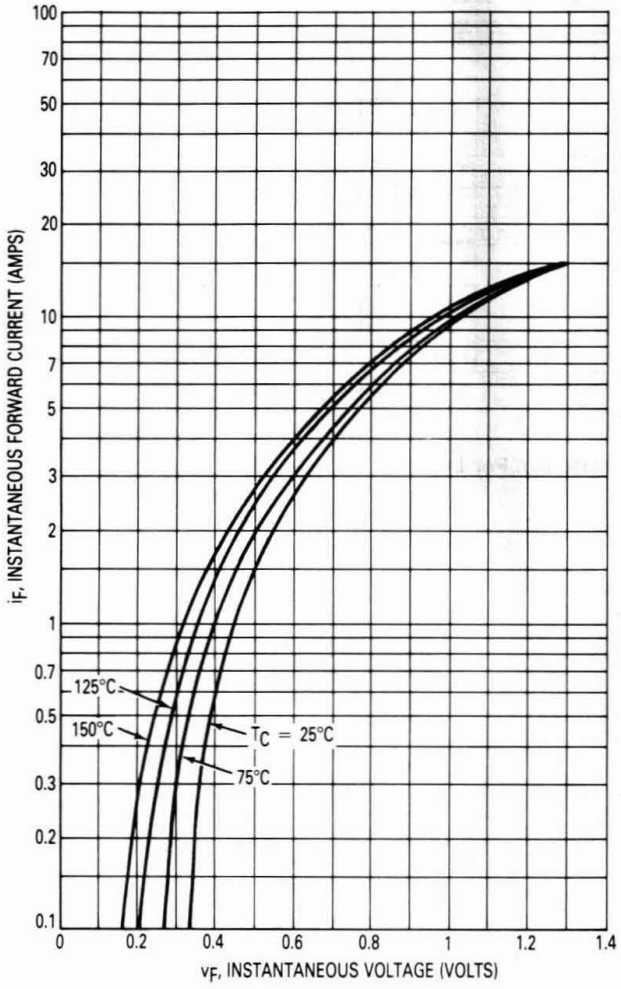

Figure 1. Typical Forward Voltage, Per Leg

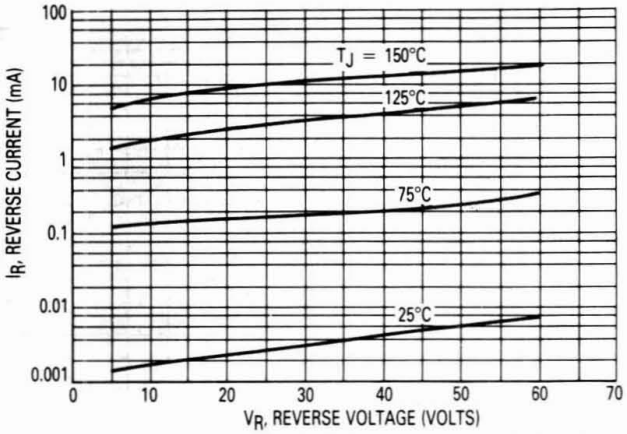

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these curves if V_R is sufficient below rated V_R.

Figure 2. Typical Reverse Current,* Per Leg

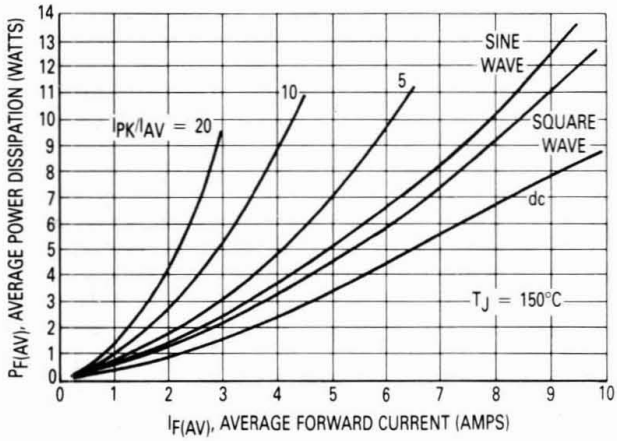

Figure 3. Average Power Dissipation, Per Leg

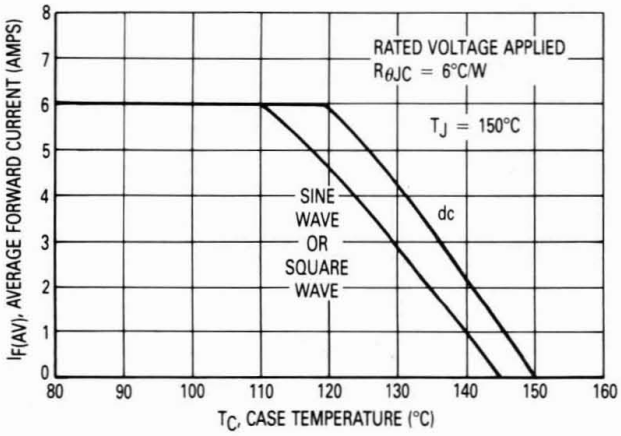

Figure 4. Current Derating, Case, Per Leg

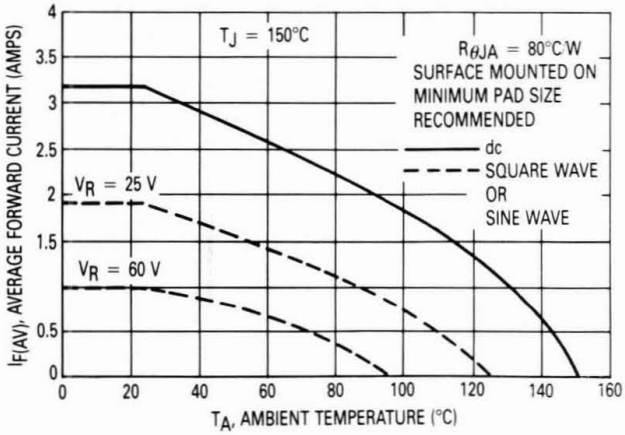

Figure 5. Current Derating, Ambient, Per Leg

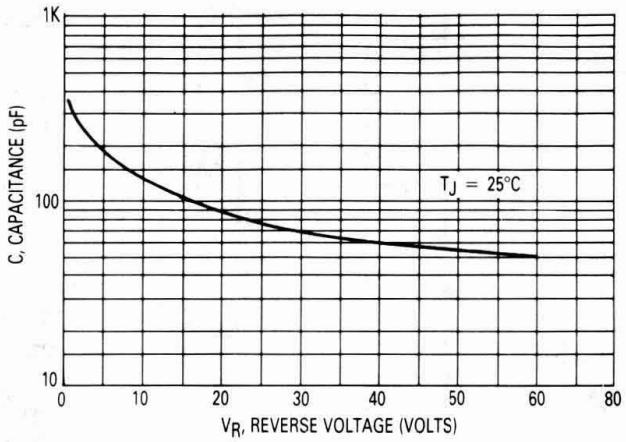

Figure 6. Typical Capacitance, Per Leg

SWITCHMODE™ Power Rectifier

DPAK Surface Mount Package

MBRD835L

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 8 AMPERES 35 VOLTS

This SWITCHMODE power rectifier which uses the Schottky Barrier principle with a proprietary barrier metal, is designed for use as output rectifiers, free wheeling, protection and steering diodes in switching power supplies, inverters and other inductive switching circuits. This state of the art device has the following features:

- Low Forward Voltage
- 125°C Operating Junction Temperature
- Epoxy Meets UL94, VO at 1/8″
- Guaranteed Reverse Avalanche
- Compact Size
- Lead Formed for Surface Mount

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 75 units per plastic tube
- Available in 16 mm Tape and Reel, 2500 units per 13" reel, by adding a "T4" suffix to the part number
- Marking: B835L



CASE 369A–13
DPAK PLASTIC, STYLE 3

3

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	Volts
Average Rectified Forward Current (At Rated V_R) T_C = +88°C	$I_{F(AV)}$	8	Amps
Peak Repetitive Forward Current (At Rated V_R, Square Wave, 20 kHz) T_C = +80°C	I_{FRM}	16	Amps
Non–Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	75	Amps
Repetitive Avalanche Current (Current Decaying Linearly to Zero in 1 μs, Frequency Limited by T_{Jmax})	I_{AR}	2	Amps
Storage Temperature	T_{stg}	−65 to +150	°C
Operating Junction Temperature	T_J	−65 to +125	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10,000	V/μs

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case	$R_{\theta JC}$	6	°C/W
Thermal Resistance — Junction to Ambient(1)	$R_{\theta JA}$	80	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage(2)	(i_F = 8 Amps, T_C = +25°C) (i_F = 8 Amps, T_C = +125°C)	V_F	0.51 0.41	Volts
Maximum Instantaneous Reverse Current(2)	(Rated dc Voltage, T_C = +25°C) (Rated dc Voltage, T_C = +100°C)	I_R	1.4 35	mA

(1) Rating applies when surface mounted on the minimum pad size recommended.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

TYPICAL CHARACTERISTICS

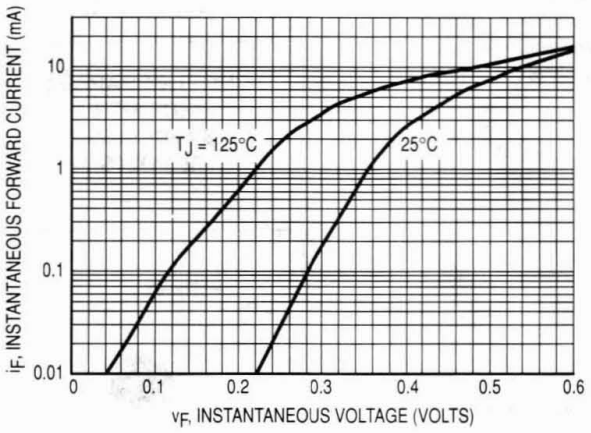

Figure 1. Maximum Forward Voltage

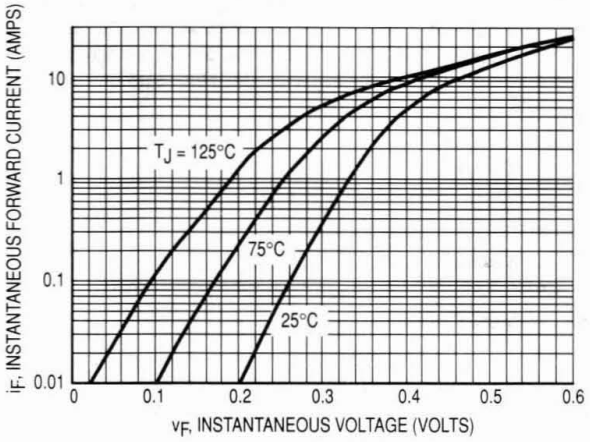

Figure 2. Typical Forward Voltage

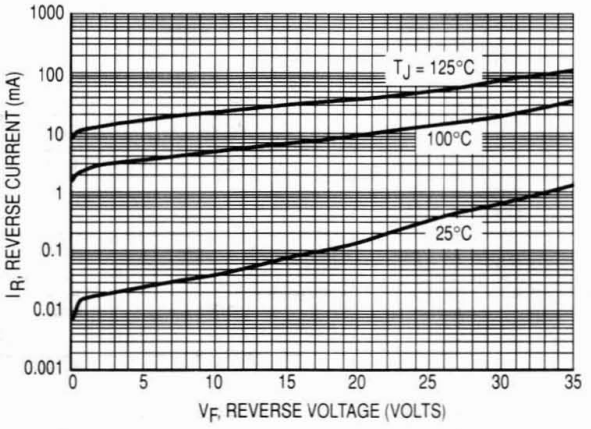

Figure 3. Maximum Reverse Current

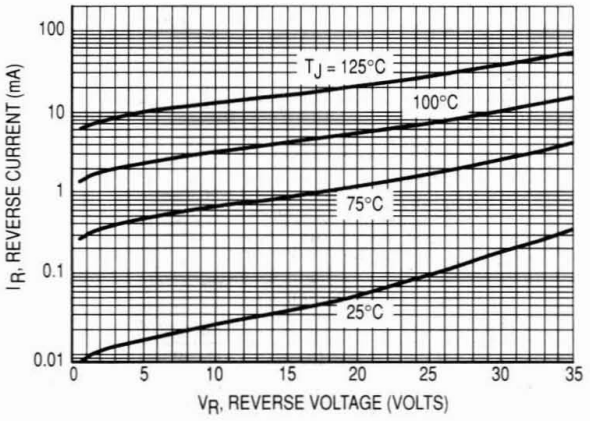

Figure 4. Typical Reverse Current

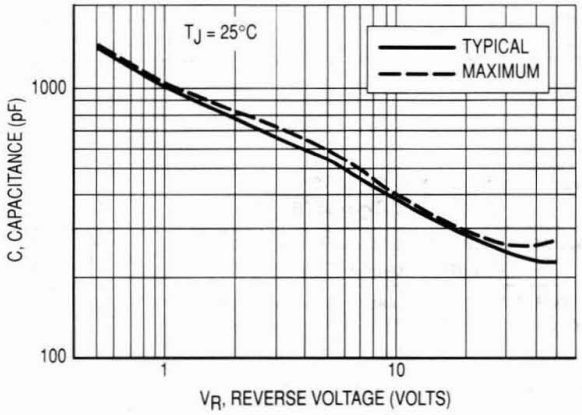

Figure 5. Maximum and Typical Capacitance

TYPICAL CHARACTERISTICS

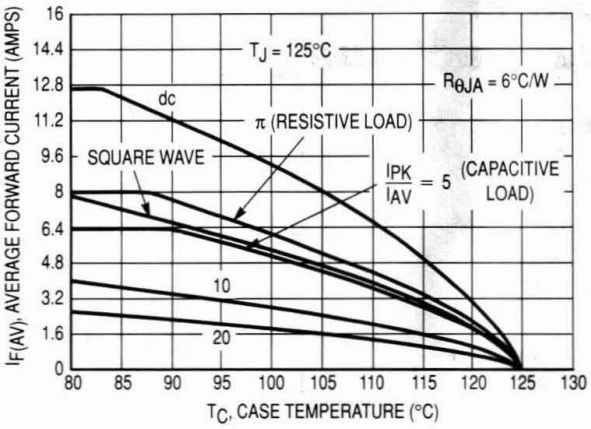

Figure 6. Current Derating, Infinite Heatsink

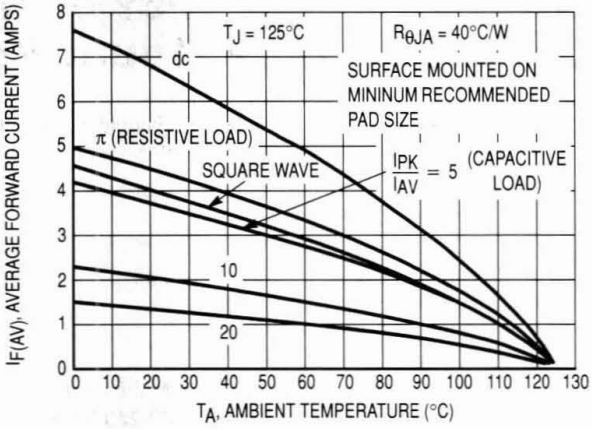

Figure 7. Current Derating

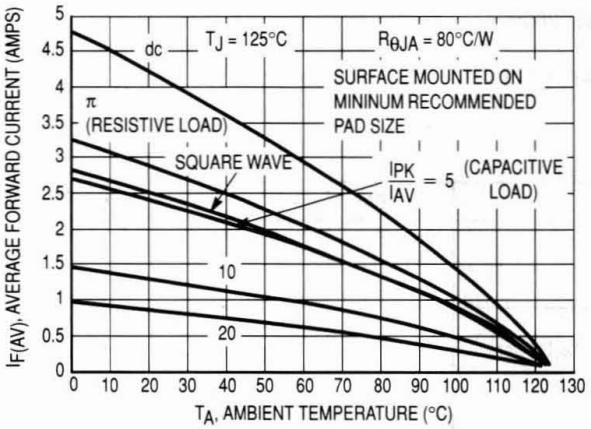

Figure 8. Current Derating, Free Air

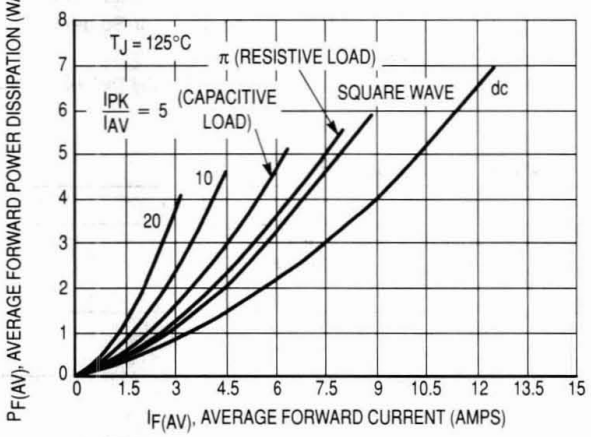

Figure 9. Forward Power Dissipation

Designer's™ Data Sheet
SWITCHMODE™ Power Rectifier
D²PAK Surface Mount Power Package

MBRB1545CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 15 AMPERES 45 VOLTS



CASE 418B-01 D²PAK



The D²PAK Power Rectifier employs the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Center-Tap Configuration
- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Epoxy Meets UL94, VO at 1/8″
- Guaranteed Reverse Avalanche
- Short Heat Sink Tab Manufactured — Not Sheared!
- Similar in Size to the Industry Standard TO-220 Package

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per 13″ reel by adding a "T4" suffix to the part number
- Marking: B1545T

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 105°C Total Device	$I_{F(AV)}$	7.5 15	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 105°C	I_{FRM}	15	Amps
Non-repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	Amp
Storage Temperature	T_{stg}	−65 to +175	°C
Operating Junction Temperature	T_J	−65 to +150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/μs

THERMAL CHARACTERISTICS, PER LEG

Thermal Resistance — Junction to Case — Junction to Ambient (1)	$R_{\theta JC}$ $R_{\theta JA}$	2.0 50	°C/W

(1) When mounted using minimum recommended pad size on FR-4 board.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. SOA Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 2

ELECTRICAL CHARACTERISTICS, PER LEG

Rating	Symbol	Value	Unit
Maximum Instantaneous Forward Voltage (2) (i_F = 7.5 Amps, T_J = 125°C) (i_F = 15 Amps, T_J = 125°C) (i_F = 15 Amps, T_J = 25°C)	v_F	 0.57 0.72 0.84	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_J = 125°C) (Rated dc Voltage, T_J = 25°C)	i_R	 15 0.1	mA

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

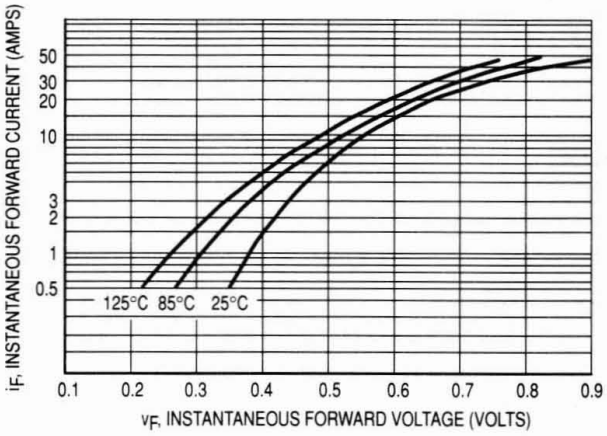

Figure 1. Typical Forward Voltage, Per Leg

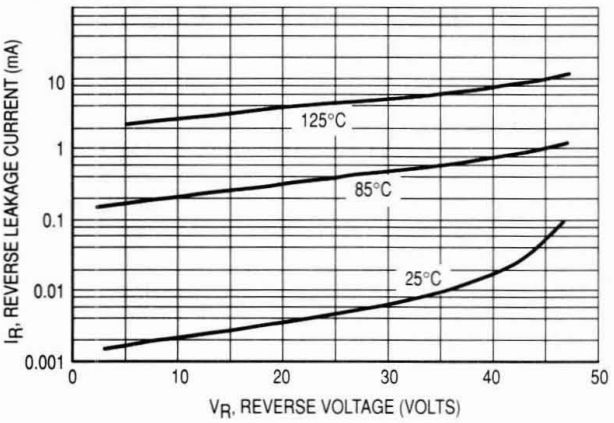

Figure 2. Typical Reverse Current, Per Leg

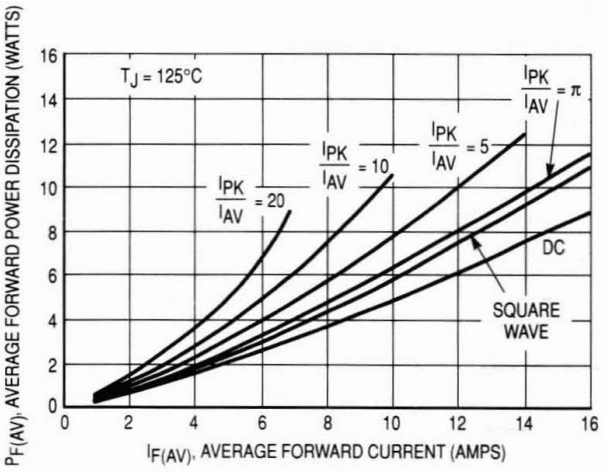

Figure 3. Typical Forward Power Dissipation

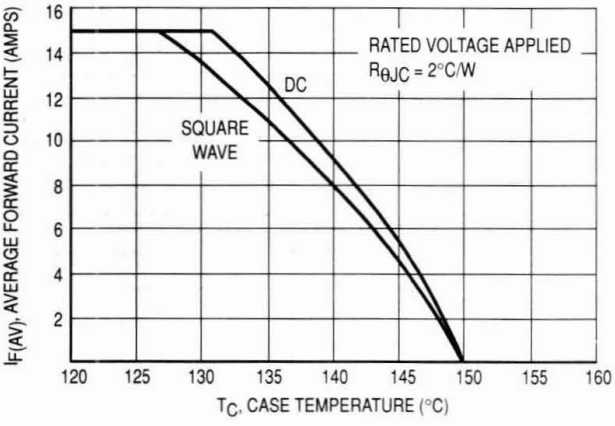

Figure 4. Current Derating, Case

Designer's™ Data Sheet
SWITCHMODE™ Power Rectifier
D²PAK Surface Mount Power Package

MBRB2060CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 20 AMPERES 60 VOLTS





CASE 418B–02

Employs the use of the Schottky Barrier principle with a platinum barrier metal. These state–of–the–art devices have the following features:

- Package Designed for Power Surface Mount Applications
- Center–Tap Configuration
- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Epoxy Meets UL94, V_O at 1/8″
- Guaranteed Reverse Avalanche
- Short Heat Sink Tab Manufactured — Not Sheared!
- Similar in Size to Industry Standard TO–220 Package

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per 13″ reel by adding a "T4" suffix to the part number
- Marking: B2060T

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	60	Volts
Average Rectified Forward Current (Rated V_R) T_C = 110°C Total Device	$I_{F(AV)}$	10 20	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 100°C	I_{FRM}	20	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	0.5	Amp
Storage Temperature	T_{stg}	−65 to +175	°C
Operating Junction Temperature	T_J	−65 to +150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/μs

THERMAL CHARACTERISTICS, PER LEG

Thermal Resistance — Junction to Case — Junction to Ambient (2)	$R_{\theta JC}$ $R_{\theta JA}$	2.0 50	°C/W

(2) See Chapter 7 for mounting conditions

Preferred devices are Motorola recommended choices for future use and best overall value.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Rating	Symbol	Value	Unit
Maximum Instantaneous Forward Voltage (1) (i_F = 20 Amps, T_J = 125°C) (i_F = 20 Amps, T_J = 25°C)	v_F	 0.85 0.95	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 125°C) (Rated dc Voltage, T_J = 25°C)	i_R	 150 0.15	mA

(1) Pulse Test: Pulse Width = 300 µs, Duty Cycle ≤ 2%

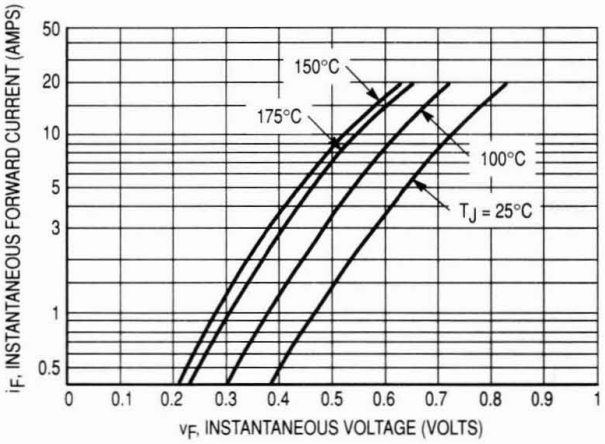

Figure 1. Typical Forward Voltage Per Diode

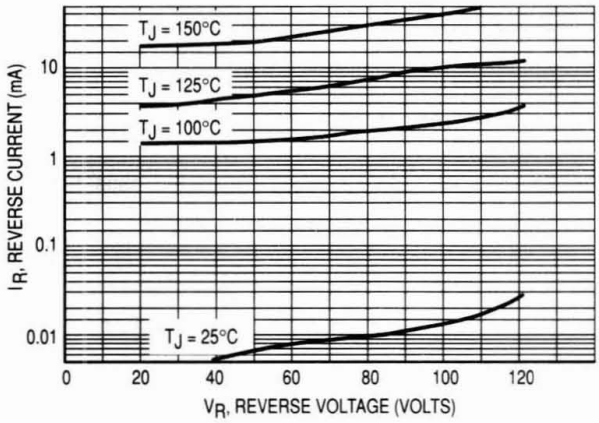

Figure 2. Typical Reverse Current Per Diode

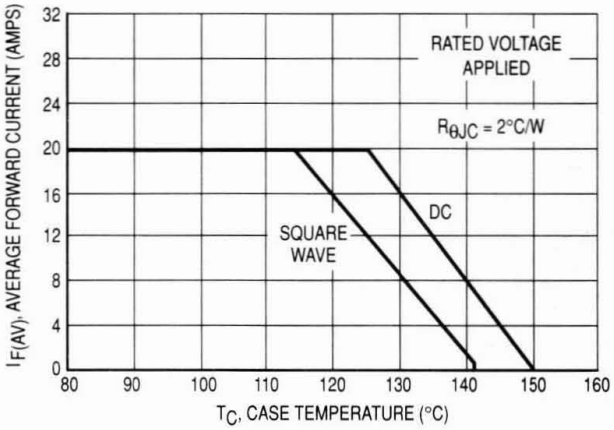

Figure 3. Typical Current Derating, Case, Per Leg

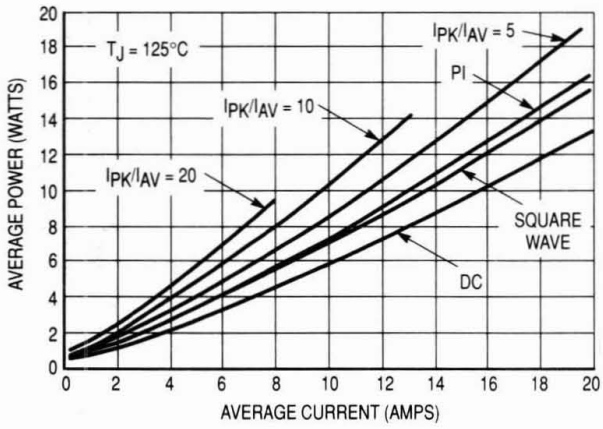

Figure 4. Average Power Dissipation and Average Current

Designer's™ Data Sheet
SWITCHMODE™ Power Rectifier
D²PAK Surface Mount Power Package

MBRB20100CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 20 AMPERES 100 VOLTS

The D²PAK Power Rectifier employs the use of the Schottky Barrier principle with a platinum barrier metal. These state–of–the–art devices have the following features:

- Package Designed for Power Surface Mount Applications
- Center–Tap Configuration
- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Epoxy Meets UL94, V_O at 1/8″
- Guaranteed Reverse Avalanche
- Short Heat Sink Tab Manufactured — Not Sheared!
- Similar in Size to Industry Standard TO–220 Package





CASE 418B–02
D²PAK

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per 13″ reel by adding a "T4" suffix to the part number
- Marking: B20100T

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	100	Volts
Average Rectified Forward Current (Rated V_R) T_C = 110°C Total Device	$I_{F(AV)}$	10 20	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 100°C	I_{FRM}	20	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	0.5	Amp
Storage Temperature	T_{stg}	−65 to +175	°C
Operating Junction Temperature	T_J	−65 to +150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/μs

THERMAL CHARACTERISTICS, PER LEG

Thermal Resistance — Junction to Case — Junction to Ambient (2)	$R_{\theta JC}$ $R_{\theta JA}$	2.0 50	°C/W

(2) See Chapter 7 for mounting conditions

Preferred devices are Motorola recommended choices for future use and best overall value.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Rating		Symbol	Value	Unit
Maximum Instantaneous Forward Voltage (1)	(i_F = 10 Amp, T_C = 125°C) (i_F = 10 Amp, T_C = 25°C) (i_F = 20 Amp, T_C = 125°C) (i_F = 20 Amp, T_C = 25°C)	v_F	0.75 0.85 0.85 0.95	Volts
Maximum Instantaneous Reverse Current (1)	(Rated dc Voltage, T_J = 125°C) (Rated dc Voltage, T_J = 25°C)	i_R	6.0 0.1	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%

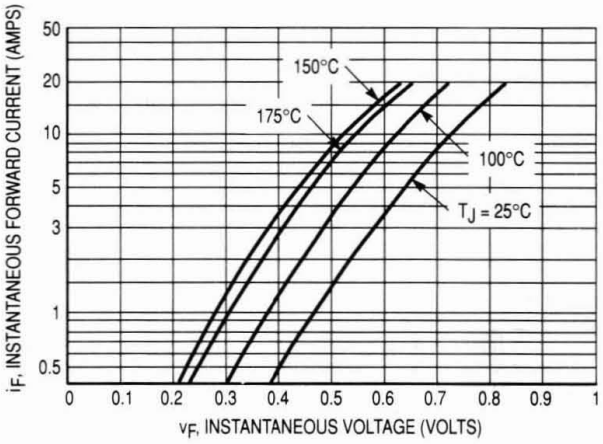

Figure 1. Typical Forward Voltage Per Diode

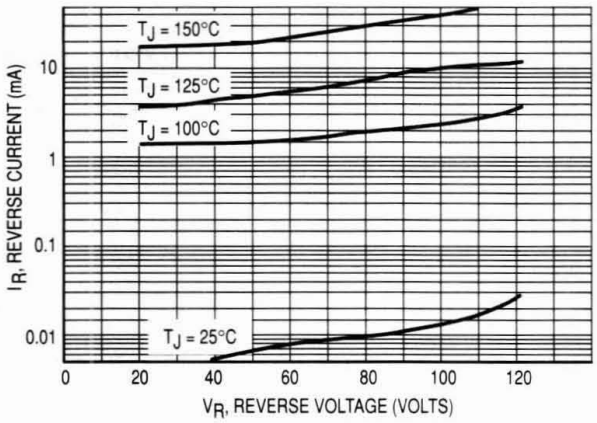

Figure 2. Typical Reverse Current Per Diode

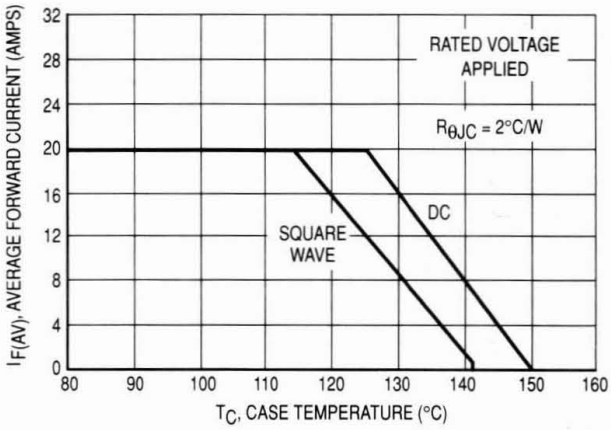

Figure 3. Typical Current Derating, Case, Per Leg

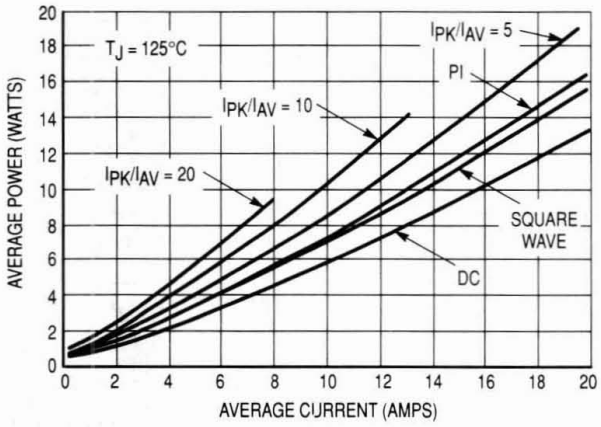

Figure 4. Average Power Dissipation and Average Current

Switchmode™ Power
Dual Schottky Rectifier

MBRB20200CT
Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 20 AMPERES 200 VOLTS

. . . using Schottky Barrier technology with a platinum barrier metal. This state–of–the–art device is designed for use in high frequency switching power supplies and converters with up to 48 volt outputs. They block up to 200 volts and offer improved Schottky performance at frequencies from 250 kHz to 5.0 MHz.

- **200 Volt Blocking Voltage**
- Low Forward Voltage Drop
- Guardring for Stress Protection and High dv/dt Capability (10,000 V/μs)
- Dual Diode Construction — Terminals 1 and 3 Must be Connected for Parallel Operation at Full Rating



CASE 418B–02

Mechanical Characteristics



- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per 13″ reel by adding a "T4" suffix to the part number
- Marking: B20200

MAXIMUM RATINGS (PER LEG)

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Current (Rated V_R) T_C = 125°C — Per Leg Per Package	$I_{F(AV)}$	10 20	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz) T_C = 90°C	I_{FRM}	20	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	Amp
Operating Junction Temperature	T_J	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10,000	V/μs

THERMAL CHARACTERISTICS (PER LEG)

Thermal Resistance — Junction to Case	$R_{\theta JC}$	2.0	°C/W

ELECTRICAL CHARACTERISTICS (PER LEG)

Maximum Instantaneous Forward Voltage (1)	(I_F = 10 Amps, T_C = 25°C) (I_F = 10 Amps, T_C = 125°C) (I_F = 20 Amps, T_C = 25°C) (I_F = 20 Amps, T_C = 125°C)	V_F	0.9 0.8 1.0 0.9	Volts
Maximum Instantaneous Reverse Current (1)	(Rated dc Voltage, T_C = 25°C) (Rated dc Voltage, T_C = 125°C)	I_R	1.0 50	mA

DYNAMIC CHARACTERISTICS (PER LEG)

Capacitance (V_R = −5.0 V, T_C = 25°C, Frequency = 1.0 MHz)	C_T	500	pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.

Preferred devices are Motorola recommended choices for future use and best overall value.

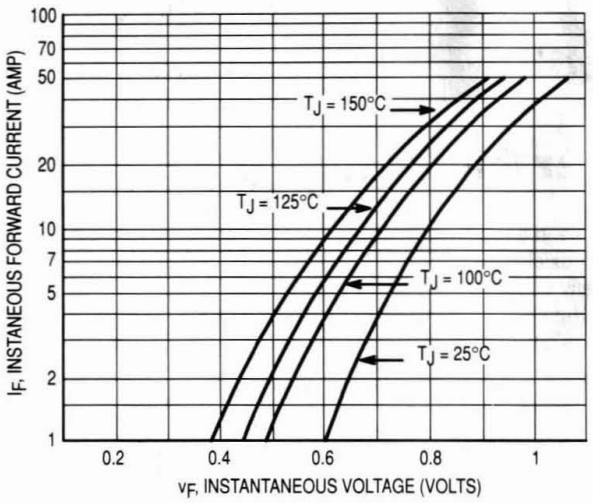

Figure 1. Typical Forward Voltage (Per Leg)

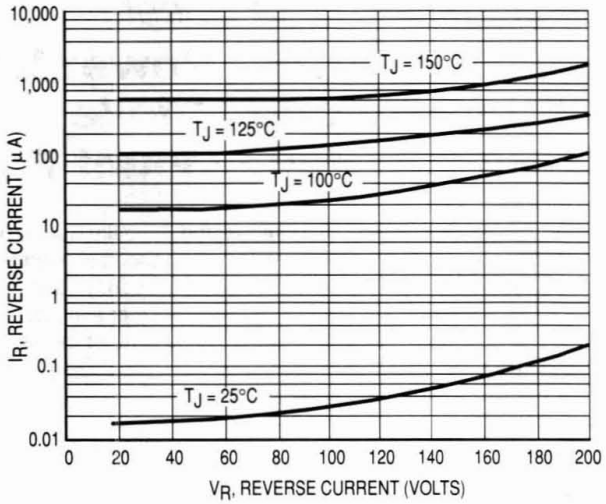

Figure 2. Typical Reverse Current (Per Leg)

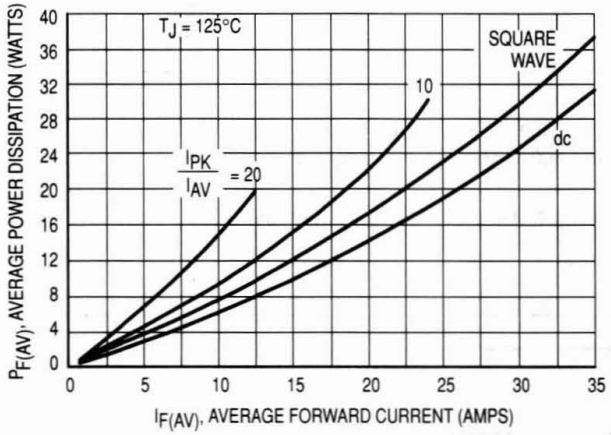

Figure 3. Forward Power Dissipation

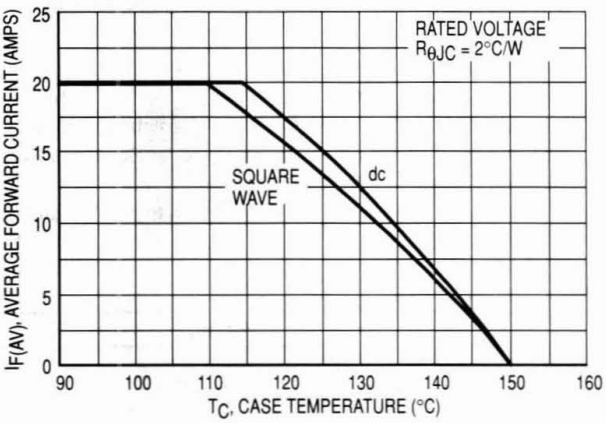

Figure 4. Current Derating, Case

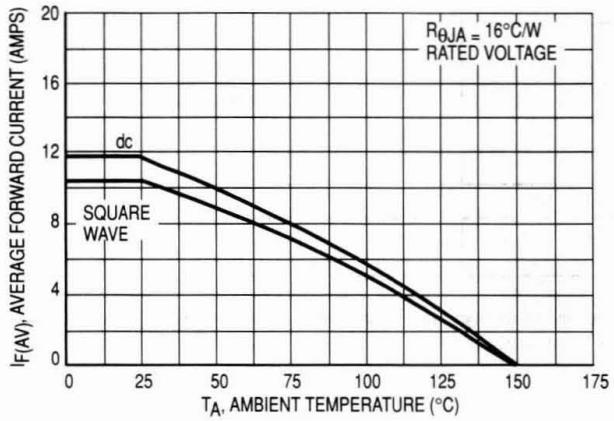

Figure 5. Current Derating, Ambient

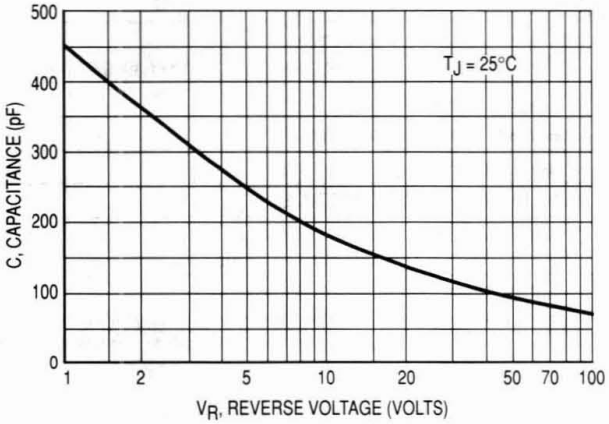

Figure 6. Typical Capacitance (Per Leg)

MBRB2515L

Motorola Preferred Device

Designer's™ Data Sheet

SWITCHMODE™ Power Rectifier OR'ing Function Diode D²PAK Surface Mount Power Package

SCHOTTKY BARRIER RECTIFIER 25 AMPERES 15 VOLTS





CASE 418B-01
D²PAK

The D²PAK Power Rectifier employs the Schottky Barrier principle in a large metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use in low voltage, high frequency switching power supplies, free wheeling diodes, and polarity protection diodes. These state-of-the-art devices have the following features:

- Guardring for Stress Protection
- Low Forward Voltage
- 100°C Operating Junction Temperature
- Epoxy Meets UL94, VO at 1/8″
- Guaranteed Reverse Avalanche
- Short Heat Sink Tab Manufactured — Not Sheared!
- Similar in Size to the Industry Standard TO-220 Package

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per 13″ reel by adding a "T4" suffix to the part number
- Marking: B2515L

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	15	Volts
Average Rectified Forward Current (Rated V_R) T_C = 90°C	$I_{F(AV)}$	25	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 100°C	I_{FRM}	30	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Storage Temperature	T_{stg}	−65 to +150	°C
Operating Junction Temperature	T_J	100	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/μs

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case — Junction to Ambient (1)	$R_{\theta JC}$ $R_{\theta JA}$	1.0 50	°C/W

(1) When mounted using minimum recommended pad size on FR-4 board.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS

Rating	Symbol	Value	Unit
Maximum Instantaneous Forward Voltage (2)	V_F		Volts
(i_F = 19 Amps, T_J = 70°C)		0.28	
(i_F = 25 Amps, T_J = 70°C)		0.42	
(i_F = 25 Amps, T_J = 25°C)		0.45	
Maximum Instantaneous Reverse Current (2)	I_R		mA
(Rated dc Voltage, T_J = 70°C)		200	
(Rated dc Voltage, T_J = 25°C)		15	

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

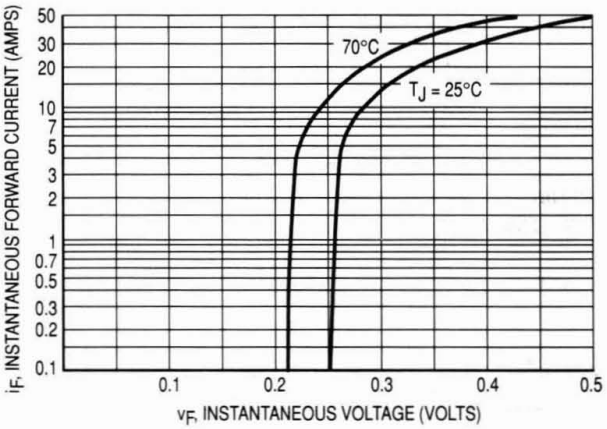

Figure 1. Typical Forward Voltage

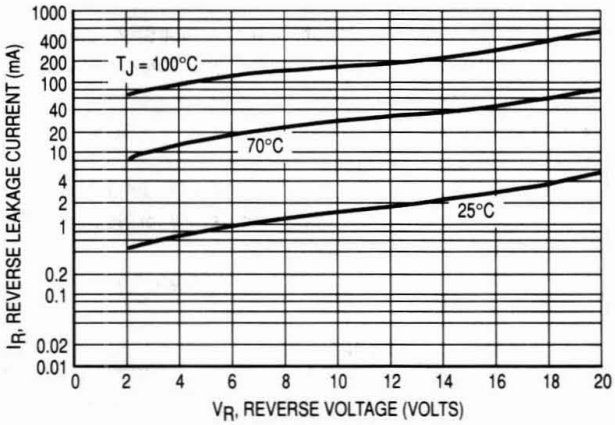

Figure 2. Typical Reverse Leakage Current

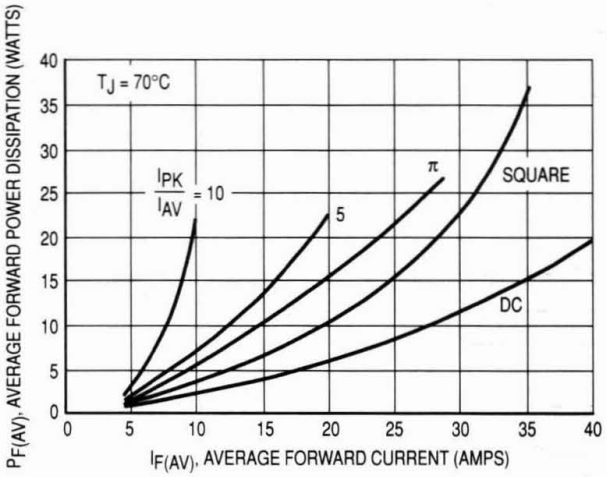

Figure 3. Typical Forward Power Dissipation

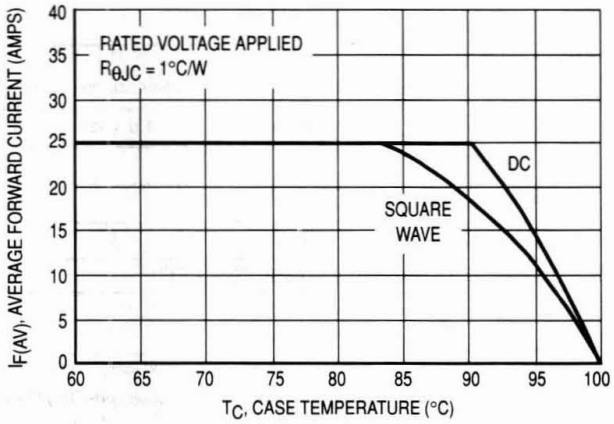

Figure 4. Current Derating, Case

Designer's™ Data Sheet

SWITCHMODE™ Power Rectifier

D²PAK Surface Mount Power Package

MBRB2535CTL

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 25 AMPERES 35 VOLTS

The D²PAK Power Rectifier employs the Schottky Barrier principle in a large metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use in low voltage, high frequency switching power supplies, free wheeling diodes, and polarity protection diodes. These state–of–the–art devices have the following features:

- Center–Tap Configuration
- Guardring for Stress Protection
- Low Forward Voltage
- 125°C Operating Junction Temperature
- Epoxy Meets UL94, VO at 1/8″
- Guaranteed Reverse Avalanche
- Short Heat Sink Tab Manufactured — Not Sheared!
- Similar in Size to the Industry Standard TO–220 Package





CASE 418B–02
D²PAK

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per 13″ reel by adding a "T4" suffix to the part number
- Marking: B2535L

MAXIMUM RATINGS (PER LEG)

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	Volts
Average Rectified Forward Current (Rated V_R) T_C = 110°C	$I_{F(AV)}$	12.5	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 90°C	I_{FRM}	25	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	Amp
Storage Temperature	T_{stg}	−65 to +150	°C
Operating Junction Temperature	T_J	−65 to +125	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10,000	V/μs

THERMAL CHARACTERISTICS (PER LEG)

Thermal Resistance — Junction to Case — Junction to Ambient (1)	$R_{\theta JC}$ $R_{\theta JA}$	2.0 50	°C/W

(1) When mounted using minimum recommended pad size on FR–4 board.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS (PER LEG)

Rating		Symbol	Value	Unit
Maximum Instantaneous Forward Voltage (2)	(i_F = 25 Amps, T_J = 25°C) (i_F = 12.5 Amps, T_J = 125°C) (i_F = 12.5 Amps, T_J = 25°C)	v_F	0.55 0.41 0.47	Volts
Maximum Instantaneous Reverse Current (2)	(Rated dc Voltage, T_J = 125°C) (Rated dc Voltage, T_J = 25°C)	i_R	500 10	mA

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

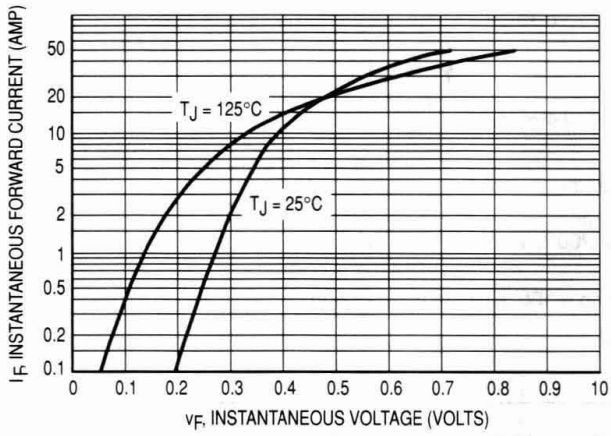

Figure 1. Typical Forward Voltage, Per Leg

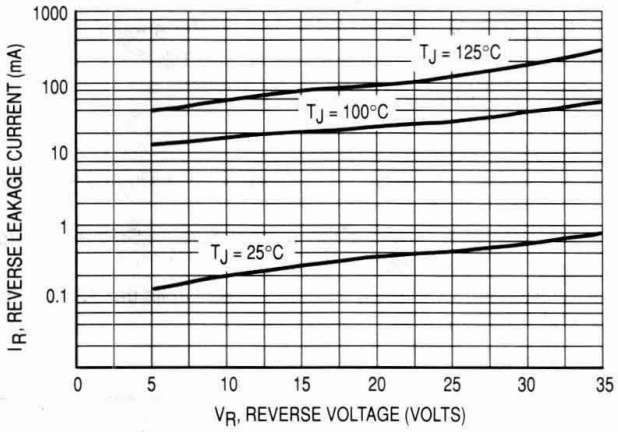

Figure 2. Typical Reverse Current, Per Leg

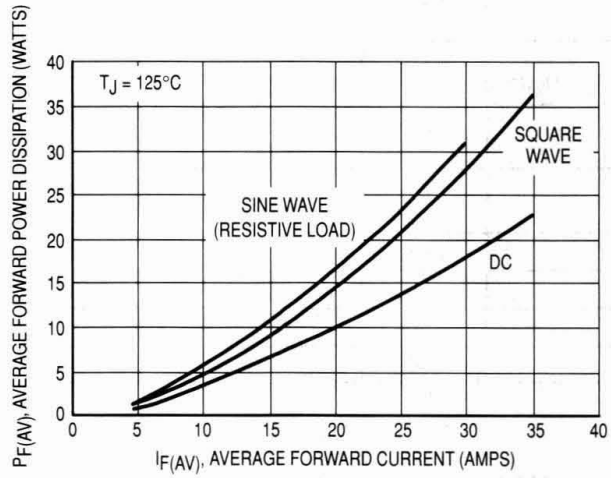

Figure 3. Typical Forward Power Dissipation

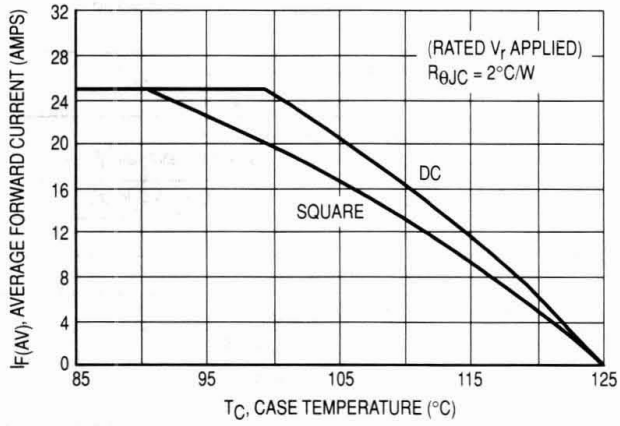

Figure 4. Current Derating, Case

Designer's™ Data Sheet
SWITCHMODE™ Power Rectifier
D²PAK Surface Mount Power Package

MBRB2545CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 30 AMPERES 45 VOLTS



CASE 418B–02
D²PAK

3

The D²PAK Power Rectifier employs the Schottky Barrier principle with a platinum barrier metal. These state–of–the–art devices have the following features:

- Center–Tap Configuration
- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Epoxy Meets UL94, VO at 1/8″
- Guaranteed Reverse Avalanche
- Short Heat Sink Tab Manufactured — Not Sheared!
- Similar in Size to the Industry Standard TO–220 Package



Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per 13″ reel by adding a "T4" suffix to the part number
- Marking: B2545T

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 130°C Total Device	$I_{F(AV)}$	15 30	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 130°C	I_{FRM}	30	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	Amp
Storage Temperature	T_{stg}	−65 to +175	°C
Operating Junction Temperature	T_J	−65 to +150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/μs

THERMAL CHARACTERISTICS, PER LEG

Thermal Resistance — Junction to Case — Junction to Ambient (1)	$R_{\theta JC}$ $R_{\theta JA}$	1.5 50	°C/W

(1) When mounted using minimum recommended pad size on FR–4 board.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 2

ELECTRICAL CHARACTERISTICS, PER LEG

Rating		Symbol	Value	Unit
Maximum Instantaneous Forward Voltage (2)	(i_F = 30 Amps, T_J = 125°C) (i_F = 30 Amps, T_J = 25°C)	v_F	0.73 0.82	Volts
Maximum Instantaneous Reverse Current (2)	(Rated dc Voltage, T_J = 125°C) (Rated dc Voltage, T_J = 25°C)	i_R	40 0.2	mA

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

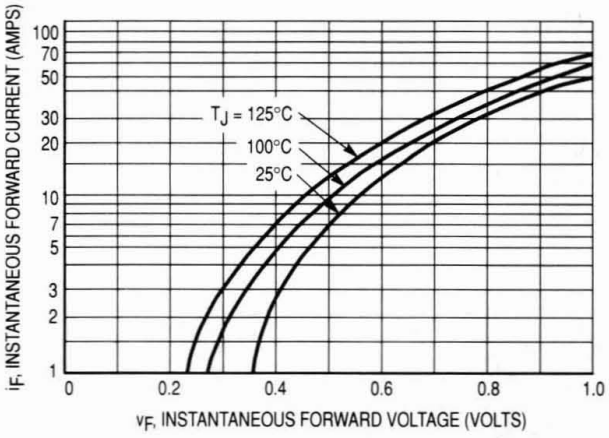

Figure 1. Typical Forward Voltage, Per Leg

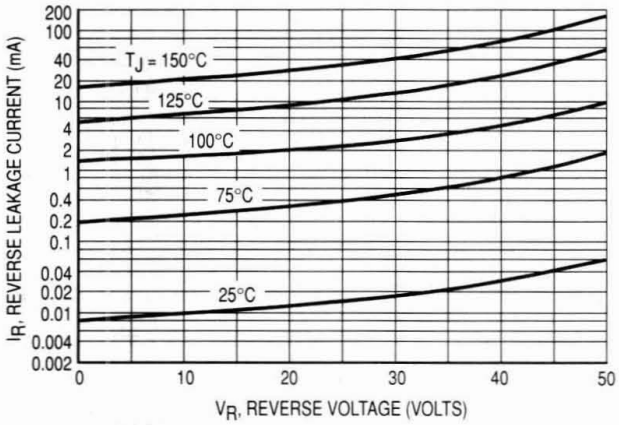

Figure 2. Typical Reverse Current, Per Leg

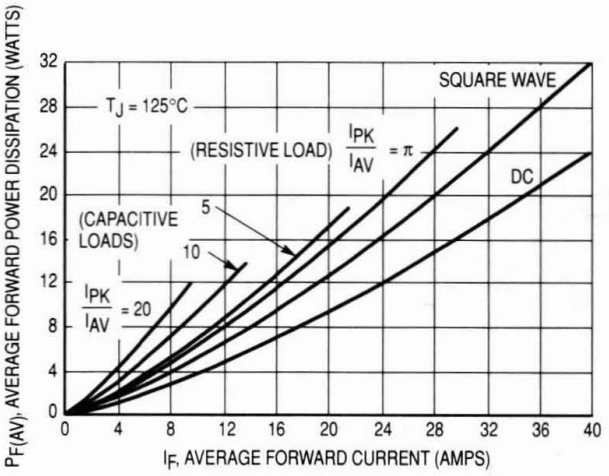

Figure 3. Typical Forward Power Dissipation

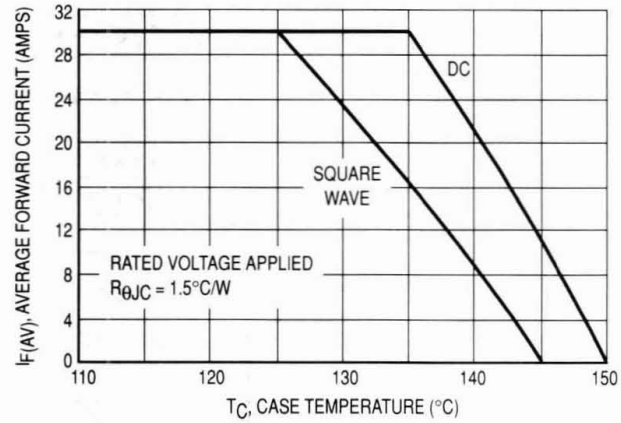

Figure 4. Current Derating, Case

Axial Lead Rectifiers

1N5817
1N5818
1N5819

1N5817 and 1N5819 are Motorola Preferred Devices

SCHOTTKY BARRIER RECTIFIERS
1 AMPERE
20, 30 and 40 VOLTS

. . . employing the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features chrome barrier metal, epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low–voltage, high–frequency inverters, free wheeling diodes, and polarity protection diodes.

- Extremely Low v_F
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 1000 per bag.
- Available Tape and Reeled, 5000 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: 1N5817, 1N5818, 1N5819

CASE 59–04

MAXIMUM RATINGS

Rating	Symbol	1N5817	1N5818	1N5819	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	V
Non–Repetitive Peak Reverse Voltage	V_{RSM}	24	36	48	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectified Forward Current (2) ($V_{R(equiv)} \le 0.2\ V_{R(dc)}$, $T_L = 90°C$, $R_{\theta JA} = 80°C/W$, P.C. Board Mounting, see Note 2, $T_A = 55°C$)	I_O	1.0			A
Ambient Temperature (Rated $V_{R(dc)}$, $P_{F(AV)} = 0$, $R_{\theta JA} = 80°C/W$)	T_A	85	80	75	°C
Non–Repetitive Peak Surge Current (Surge applied at rated load conditions, half–wave, single phase 60 Hz, $T_L = 70°C$)	I_{FSM}	25 (for one cycle)			A
Operating and Storage Junction Temperature Range (Reverse Voltage applied)	T_J, T_{stg}	–65 to +125			°C
Peak Operating Junction Temperature (Forward Current applied)	$T_{J(pk)}$	150			°C

THERMAL CHARACTERISTICS (2)

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	80	°C/W

ELECTRICAL CHARACTERISTICS ($T_L = 25°C$ unless otherwise noted) (2)

Characteristic		Symbol	1N5817	1N5818	1N5819	Unit
Maximum Instantaneous Forward Voltage (1)	($i_F = 0.1$ A) ($i_F = 1.0$ A) ($i_F = 3.0$ A)	v_F	0.32 0.45 0.75	0.33 0.55 0.875	0.34 0.6 0.9	V
Maximum Instantaneous Reverse Current @ Rated dc Voltage (1)	($T_L = 25°C$) ($T_L = 100°C$)	I_R	1.0 10	1.0 10	1.0 10	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%.
(2) Lead Temperature reference is cathode lead 1/32″ from case.

Rev 3

NOTE 1 — DETERMINING MAXIMUM RATINGS

Reverse power dissipation and the possibility of thermal runaway must be considered when operating this rectifier at reverse voltages above 0.1 V_{RWM}. Proper derating may be accomplished by use of equation (1).

$$T_{A(max)} = T_{J(max)} - R_{\theta JA}P_{F(AV)} - R_{\theta JA}P_{R(AV)} \quad (1)$$

where $T_{A(max)}$ = Maximum allowable ambient temperature
$T_{J(max)}$ = Maximum allowable junction temperature (125°C or the temperature at which thermal runaway occurs, whichever is lowest)
$P_{F(AV)}$ = Average forward power dissipation
$P_{R(AV)}$ = Average reverse power dissipation
$R_{\theta JA}$ = Junction–to–ambient thermal resistance

Figures 1, 2, and 3 permit easier use of equation (1) by taking reverse power dissipation and thermal runaway into consideration. The figures solve for a reference temperature as determined by equation (2).

$$T_R = T_{J(max)} - R_{\theta JA}P_{R(AV)} \quad (2)$$

Substituting equation (2) into equation (1) yields:

$$T_{A(max)} = T_R - R_{\theta JA}P_{F(AV)} \quad (3)$$

Inspection of equations (2) and (3) reveals that T_R is the ambient temperature at which thermal runaway occurs or where T_J = 125°C, when forward power is zero. The transition from one boundary condition to the other is evident on the curves of Figures 1, 2, and 3 as a difference in the rate of change of the slope in the vicinity of 115°C. The data of Figures 1, 2, and 3 is based upon dc conditions. For use in common rectifier circuits, Table 1 indicates suggested factors for an equivalent dc voltage to use for conservative design, that is:

$$V_{R(equiv)} = V_{in(PK)} \times F \quad (4)$$

The factor F is derived by considering the properties of the various rectifier circuits and the reverse characteristics of Schottky diodes.

EXAMPLE: Find $T_{A(max)}$ for 1N5818 operated in a 12–volt dc supply using a bridge circuit with capacitive filter such that I_{DC} = 0.4 A ($I_{F(AV)}$ = 0.5 A), $I_{(FM)}/I_{(AV)}$ = 10, Input Voltage = 10 $V_{(rms)}$, $R_{\theta JA}$ = 80°C/W.

Step 1. Find $V_{R(equiv)}$. Read F = 0.65 from Table 1,
$\therefore V_{R(equiv)} = (1.41)(10)(0.65) = 9.2$ V.

Step 2. Find T_R from Figure 2. Read T_R = 109°C
@ V_R = 9.2 V and $R_{\theta JA}$ = 80°C/W.

Step 3. Find $P_{F(AV)}$ from Figure 4. **Read $P_{F(AV)}$ = 0.5 W

$$@ \frac{I_{(FM)}}{I_{(AV)}} = 10 \text{ and } I_{F(AV)} = 0.5 \text{ A.}$$

Step 4. Find $T_{A(max)}$ from equation (3).
$T_{A(max)} = 109 - (80)(0.5) = 69$°C.

**Values given are for the 1N5818. Power is slightly lower for the 1N5817 because of its lower forward voltage, and higher for the 1N5819.

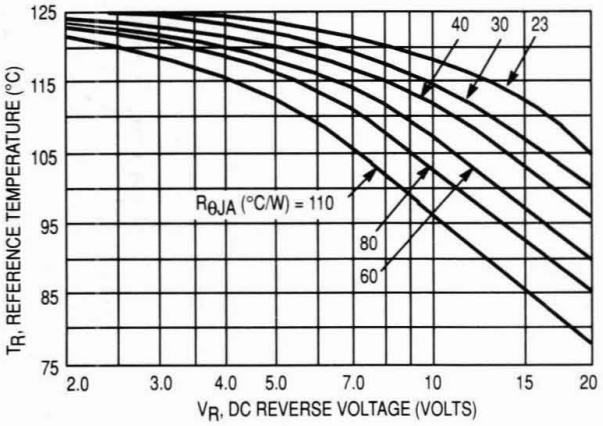

Figure 1. Maximum Reference Temperature 1N5817

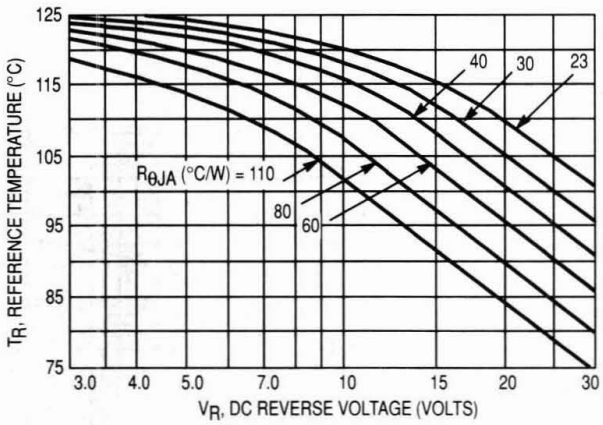

Figure 2. Maximum Reference Temperature 1N5818

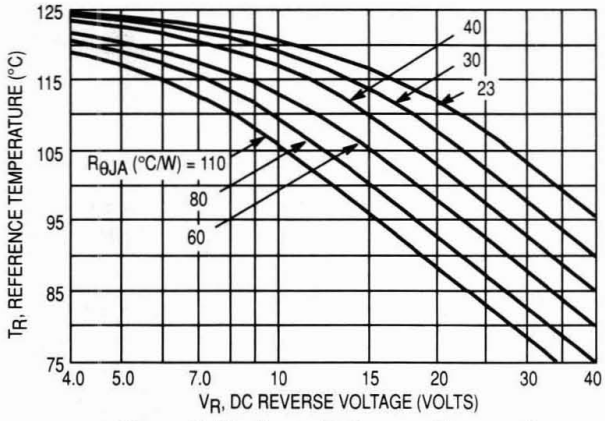

Figure 3. Maximum Reference Temperature 1N5819

Table 1. Values for Factor F

Circuit	Half Wave		Full Wave, Bridge		Full Wave, Center Tapped*†	
Load	Resistive	Capacitive*	Resistive	Capacitive	Resistive	Capacitive
Sine Wave	0.5	1.3	0.5	0.65	1.0	1.3
Square Wave	0.75	1.5	0.75	0.75	1.5	1.5

*Note that $V_{R(PK)} \approx 2.0\ V_{in(PK)}$. † Use line to center tap voltage for V_{in}.

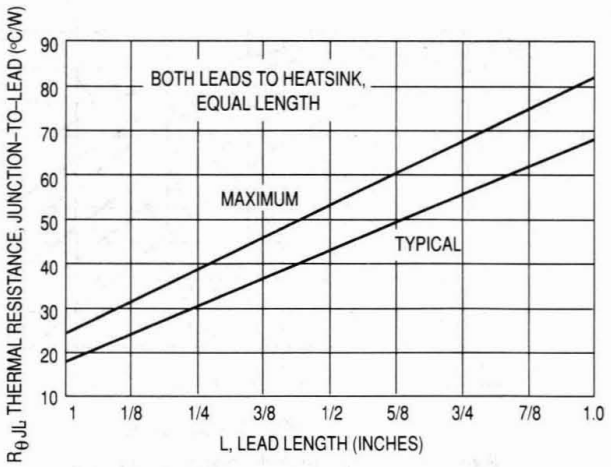

Figure 4. Steady–State Thermal Resistance

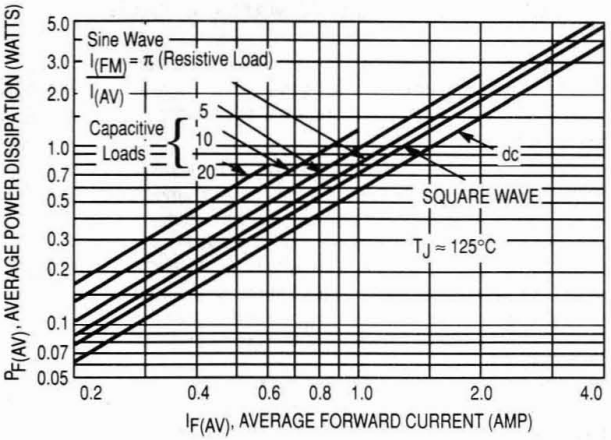

Figure 5. Forward Power Dissipation 1N5817–19

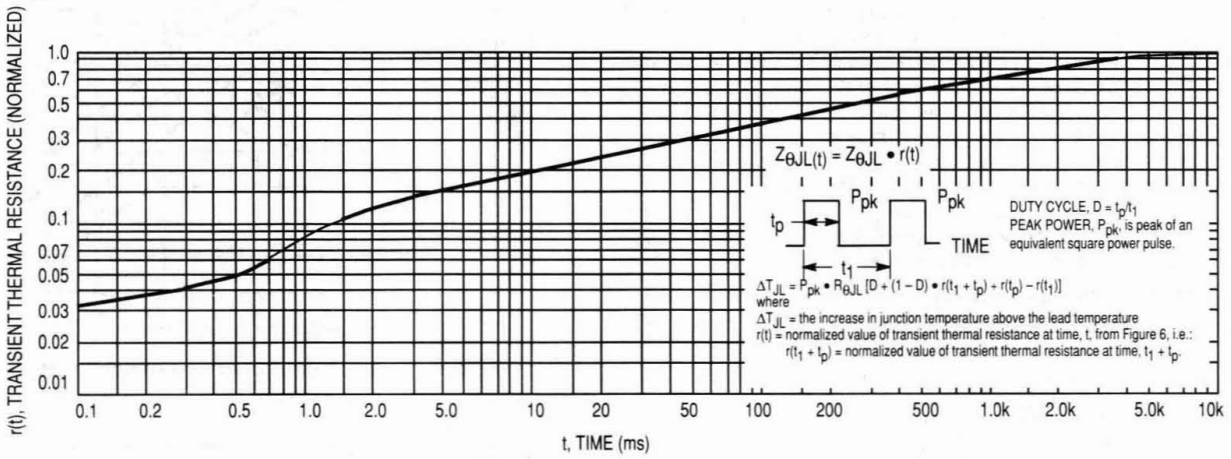

Figure 6. Thermal Response

NOTE 2 — MOUNTING DATA

Data shown for thermal resistance junction–to–ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering, or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

Mounting Method	Lead Length, L (in)				$R_{\theta JA}$
	1/8	1/4	1/2	3/4	
1	52	65	72	85	°C/W
2	67	80	87	100	°C/W
3	50				°C/W

Mounting Method 1

P.C. Board with 1–1/2″ x 1–1/2″ copper surface.



Mounting Method 2



VECTOR PIN MOUNTING

Mounting Method 3

P.C. Board with 1–1/2″ x 1–1/2″ copper surface.



NOTE 3 — THERMAL CIRCUIT MODEL
(For heat conduction through the leads)

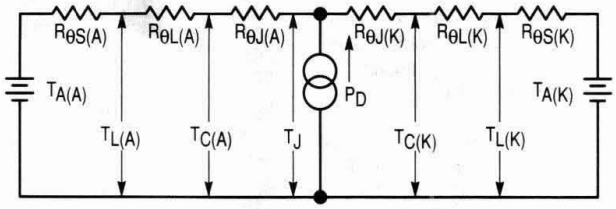

Use of the above model permits junction to lead thermal resistance for any mounting configuration to be found. For a given total lead length, lowest values occur when one side of the rectifier is brought as close as possible to the heatsink. Terms in the model signify:

T_A = Ambient Temperature T_C = Case Temperature
T_L = Lead Temperature T_J = Junction Temperature
$R_{\theta S}$ = Thermal Resistance, Heatsink to Ambient
$R_{\theta L}$ = Thermal Resistance, Lead to Heatsink
$R_{\theta J}$ = Thermal Resistance, Junction to Case
P_D = Power Dissipation

(Subscripts A and K refer to anode and cathode sides, respectively.)
Values for thermal resistance components are:
$R_{\theta L}$ = 100°C/W/in typically and 120°C/W/in maximum
$R_{\theta J}$ = 36°C/W typically and 46°C/W maximum.

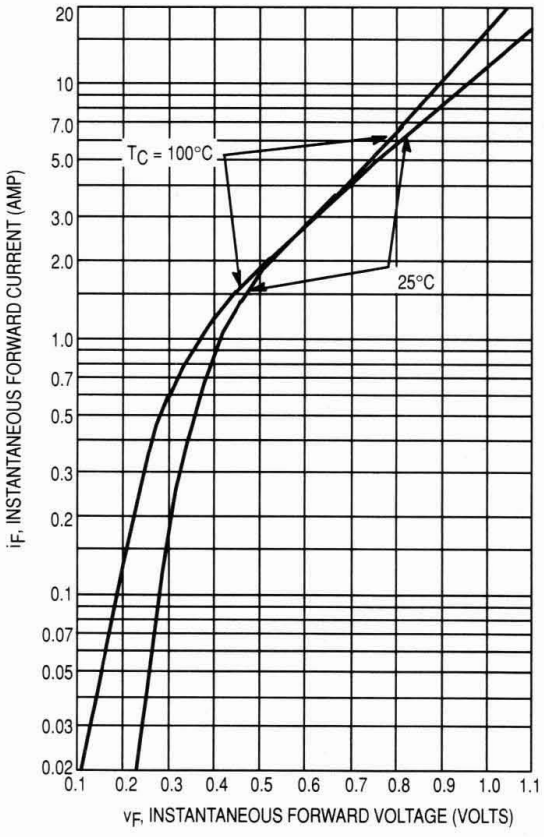

Figure 7. Typical Forward Voltage

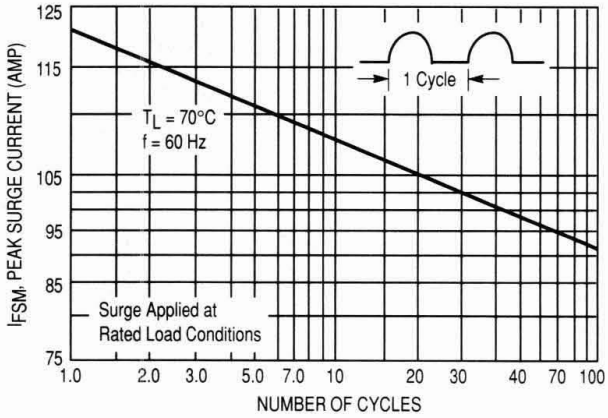

Figure 8. Maximum Non–Repetitive Surge Current

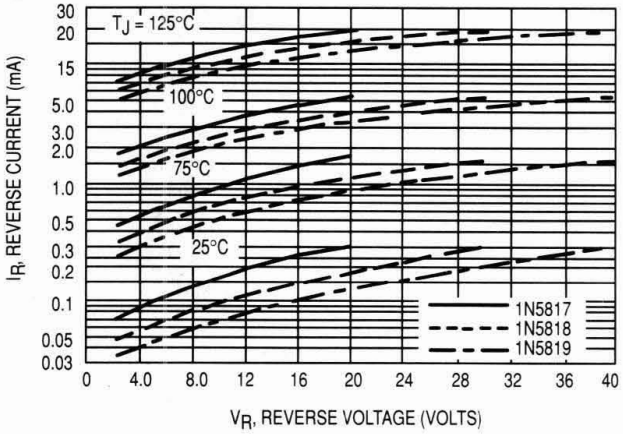

Figure 9. Typical Reverse Current

NOTE 4 — HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 10.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 percent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss: it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

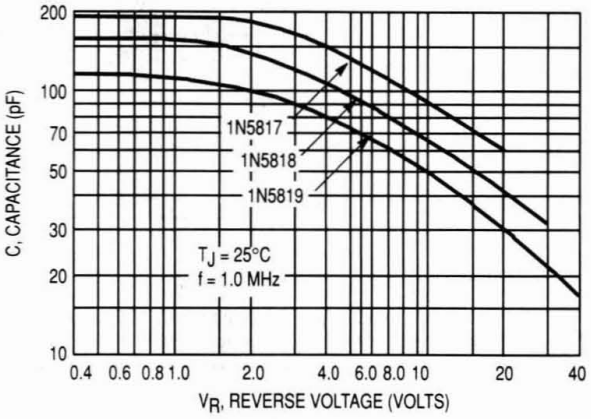

Figure 10. Typical Capacitance

MBR150
MBR160

Axial Lead Rectifiers

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

- Low Reverse Current
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency
- Highly Stable Oxide Passivated Junction

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 1000 per bag.
- Available Tape and Reeled, 5000 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: B150, B160

MBR160 is a Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 1 AMPERE 50, 60 VOLTS

CASE 59-04 PLASTIC

MAXIMUM RATINGS

Rating	Symbol	MBR150	MBR160	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	60	Volts
RMS Reverse Voltage	$V_{R(RMS)}$	35	42	Volts
Average Rectified Forward Current (2) ($V_{R(equiv)} \leq 0.2\ V_{R(dc)}$, T_L = 90°C, $R_{\theta JA}$ = 80°C/W, P.C. Board Mounting, see Note 3, T_A = 55°C)	I_O	1		Amp
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, half-wave, single phase, 60 Hz, T_L = 70°C)	I_{FSM}	25 (for one cycle)		Amps
Operating and Storage Junction Temperature Range (Reverse Voltage applied)	T_J, T_{stg}	−65 to +150		°C
Peak Operating Junction Temperature (Forward Current applied)	$T_{J(pk)}$	150		°C

THERMAL CHARACTERISTICS (Notes 3 and 4)

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	80	°C/W

ELECTRICAL CHARACTERISTICS (T_L = 25°C unless otherwise noted) (2)

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (1) (i_F = 0.1 A) (i_F = 1 A) (i_F = 3 A)	v_F	 0.550 0.750 1.000	Volt
Maximum Instantaneous Reverse Current @ Rated dc Voltage (1) (T_L = 25°C) (T_L = 100°C)	i_R	 0.5 5	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.
(2) Lead Temperature reference is cathode lead 1/32″ from case.

Rev 1

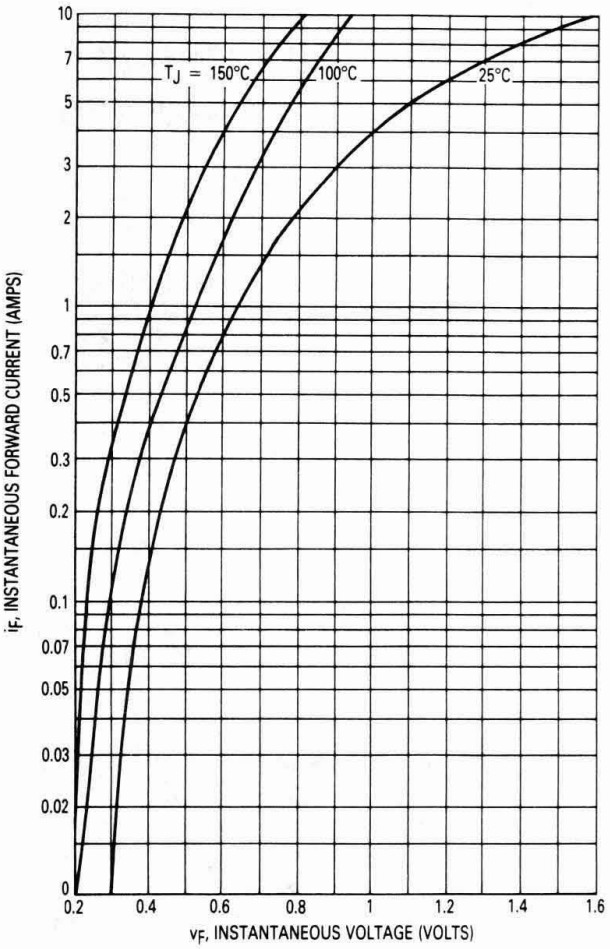

Figure 1. Typical Forward Voltage

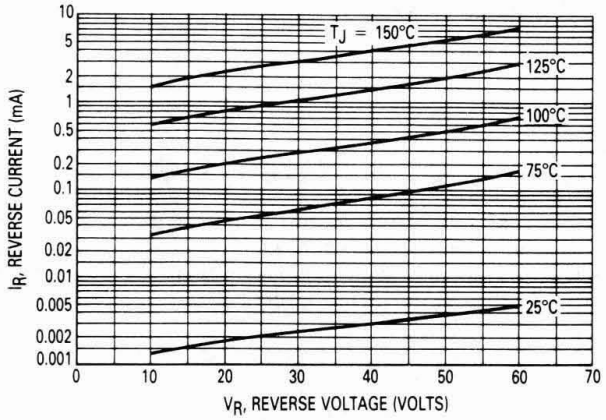

Figure 2. Typical Reverse Current*

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R.

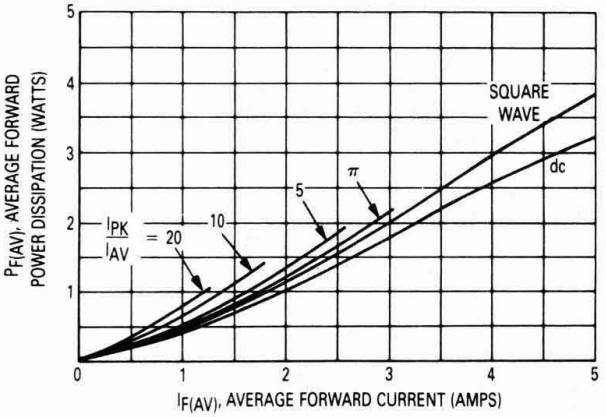

Figure 3. Forward Power Dissipation

THERMAL CHARACTERISTICS

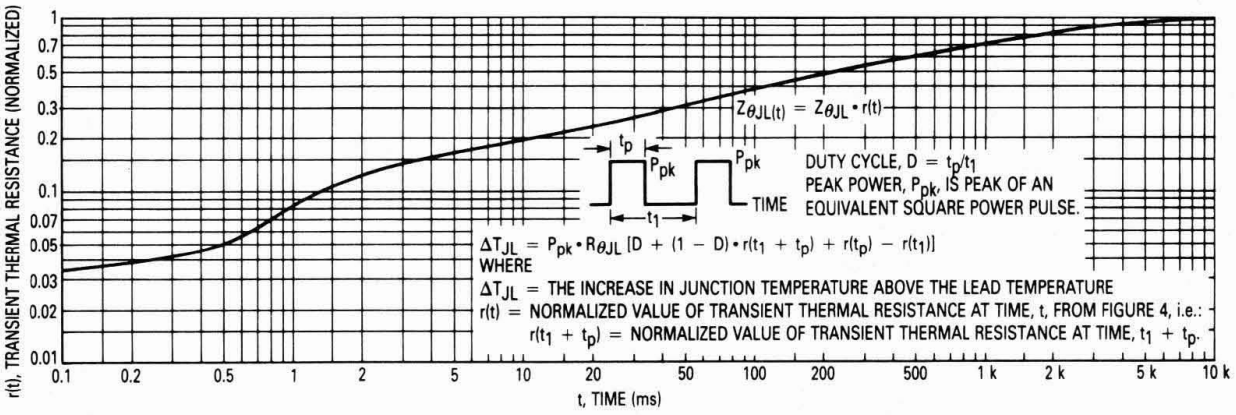

Figure 4. Thermal Response

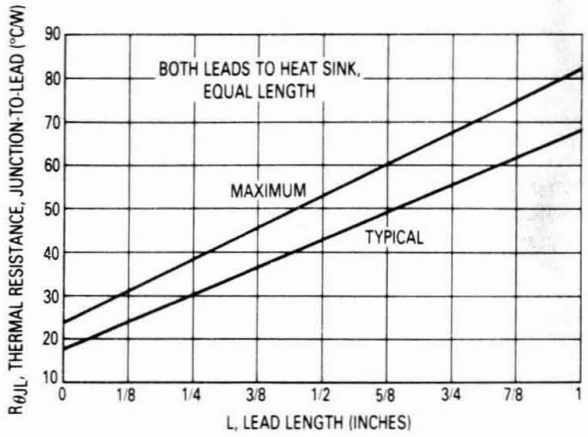

Figure 5. Steady-State Thermal Resistance

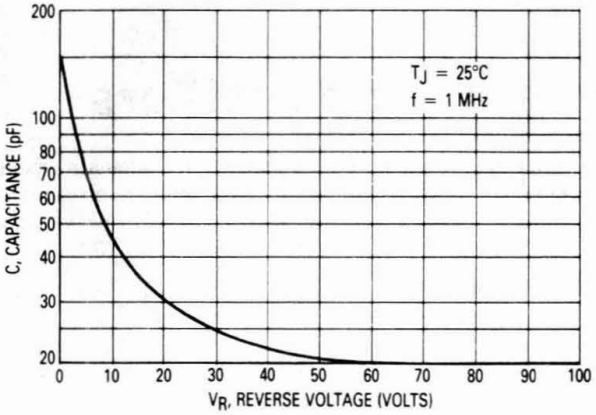

Figure 6. Typical Capacitance

NOTE 3 — MOUNTING DATA:

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mounting shown is to be used as a typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.

Typical Values for $R_{\theta JA}$ in Still Air

Mounting Method	Lead Length, L (in)				$R_{\theta JA}$
	1/8	1/4	1/2	3/4	
1	52	65	72	85	°C/W
2	67	80	87	100	°C/W
3			50		°C/W

Mounting Method 1
P.C. Board with 1-1/2" x 1-1/2" copper surface.



Mounting Method 2



VECTOR PIN MOUNTING

Mounting Method 3
P.C. Board with 1-1/2" x 1-1/2" copper surface.



NOTE 4 — THERMAL CIRCUIT MODEL:
(For heat conduction through the leads)

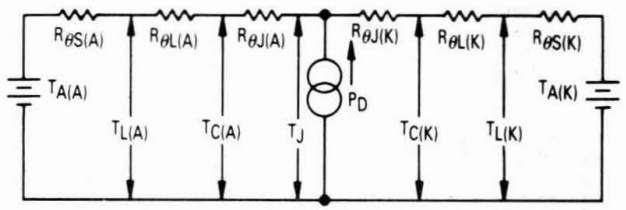

Use of the above model permits junction to lead thermal resistance for any mounting configuration to be found. For a given total lead length, lowest values occur when one side of the rectifier is brought as close as possible to the heat sink. Terms in the model signify:

T_A = Ambient Temperature T_C = Case Temperature
T_L = Lead Temperature T_J = Junction Temperature
$R_{\theta S}$ = Thermal Resistance, Heat Sink to Ambient
$R_{\theta L}$ = Thermal Resistance, Lead to Heat Sink
$R_{\theta J}$ = Thermal Resistance, Junction to Case
P_D = Power Dissipation

(Subscripts A and K refer to anode and cathode sides, respectively.) Values for thermal resistance components are:
$R_{\theta L}$ = 100°C/W/in typically and 120°C/W/in maximum.
$R_{\theta J}$ = 36°C/W typically and 46°C/W maximum.

NOTE 5 — HIGH FREQUENCY OPERATION:

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 6.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximatley 70 percent at 2 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss: it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

Axial Lead Rectifiers

MBR170
MBR180
MBR190
MBR1100

MBR1100 is a
Motorola Preferred Device

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

- Low Reverse Current
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency
- Highly Stable Oxide Passivated Junction
- Guard-Ring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- High Surge Capacity

SCHOTTKY BARRIER RECTIFIERS
1 AMPERE
70, 80, 90, 100 VOLTS

CASE 59-04
PLASTIC

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 1000 per bag.
- Available Tape and Reeled, 5000 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: B170, B180, B190, B1100

MAXIMUM RATINGS

Rating	Symbol	MBR170	MBR180	MBR190	MBR1100	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	70	80	90	100	Volts
Average Rectified Forward Current ($V_{R(equiv)} \leq 0.2\ V_R(dc)$, $R_{\theta JA}$ = 50°C/W, P.C. Board Mounting, see Note 1, T_A = 120°C)	I_O	1				Amp
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, half-wave, single phase, 60 Hz)	I_{FSM}	50				Amps
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150				°C
Voltage Rate of Change (Rated V_R)	dv/dt	10				V/ns

THERMAL CHARACTERISTICS (See Note 2)

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	See Note 1	°C/W

ELECTRICAL CHARACTERISTICS (T_L = 25°C unless otherwise noted)

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage* (i_F = 1 A, T_L = 25°C) (i_F = 1 A, T_L = 100°C)	v_F	 0.79 0.69	Volt
Maximum Instantaneous Reverse Current @ Rated dc Voltage* (T_L = 25°C) (T_L = 100°C)	i_R	 0.5 5	mA

*Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 1

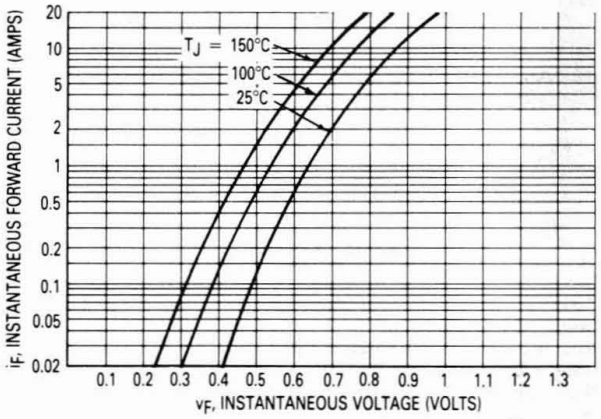

Figure 1. Typical Forward Voltage

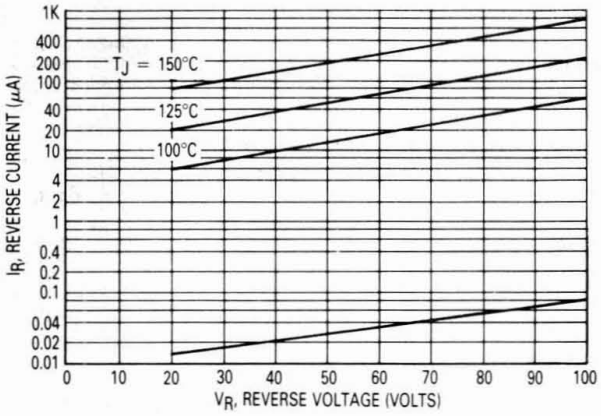

Figure 2. Typical Reverse Current*

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R.

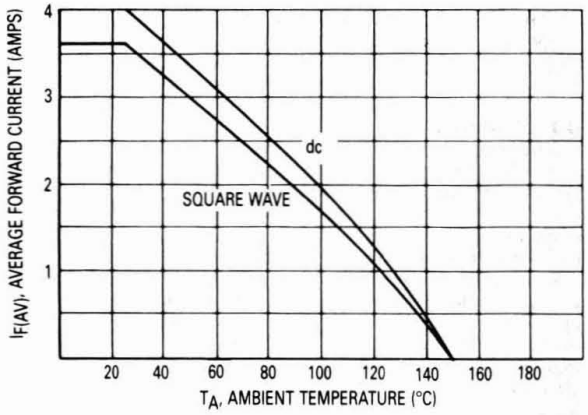

Figure 3. Current Derating (Mounting method 3 per note 1.)

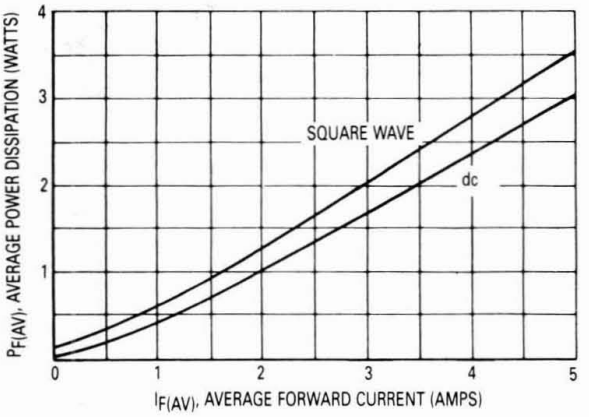

Figure 4. Power Dissipation

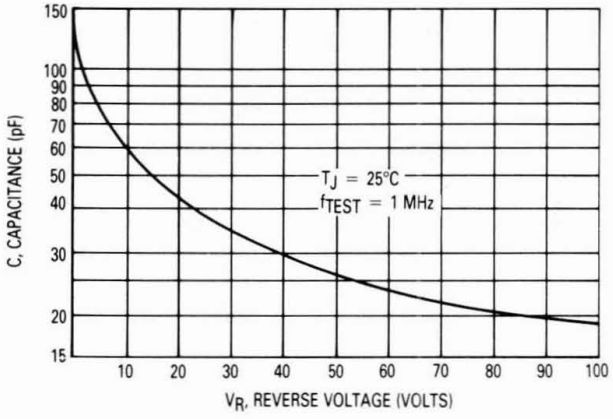

Figure 5. Typical Capacitance

NOTE 1 — MOUNTING DATA:

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.

Typical Values for $R_{\theta JA}$ in Still Air

Mounting Method	Lead Length, L (in)				$R_{\theta JA}$
	1/8	1/4	1/2	3/4	
1	52	65	72	85	°C/W
2	67	80	87	100	°C/W
3			50		°C/W

Mounting Method 1
P.C. Board with
1-1/2" x 1-1/2"
copper surface.



Mounting Method 2



VECTOR PIN MOUNTING

Mounting Method 3
P.C. Board with
1-1/2" x 1-1/2"
copper surface.



NOTE 2 — THERMAL CIRCUIT MODEL:
(For heat conduction through the leads)

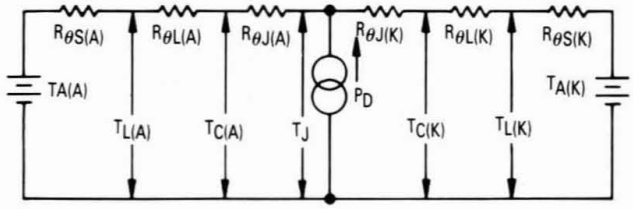

Use of the above model permits junction to lead thermal resistance for any mounting configuration to be found. For a given total lead length, lowest values occur when one side of the rectifier is brought as close as possible to the heat sink. Terms in the model signify:

T_A = Ambient Temperature T_C = Case Temperature
T_L = Lead Temperature T_J = Junction Temperature
$R_{\theta S}$ = Thermal Resistance, Heat Sink to Ambient
$R_{\theta L}$ = Thermal Resistance, Lead to Heat Sink
$R_{\theta J}$ = Thermal Resistance, Junction to Case
P_D = Power Dissipation

(Subscripts A and K refer to anode and cathode sides, respectively.) Values for thermal resistance components are:
$R_{\theta L}$ = 100°C/W/in typically and 120°C/W/in maximum.
$R_{\theta J}$ = 36°C/W typically and 46°C/W maximum.

NOTE 3 — HIGH FREQUENCY OPERATION:

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 5.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 percent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss: it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

1N5820
1N5821
1N5822

1N5820 and 1N5822 are
Motorola Preferred Devices

Designer's Data Sheet

Axial Lead Rectifiers

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features chrome barrier metal, epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

- Extremely Low v_F
- Low Power Loss/High Efficiency
- Low Stored Charge, Majority Carrier Conduction

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.1 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16" from case
- Shipped in plastic bags, 5,000 per bag.
- Available Tape and Reeled, 1500 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: 1N5820, 1N5821, 1N5822

SCHOTTKY BARRIER RECTIFIERS

3.0 AMPERES
20, 30, 40 VOLTS

CASE 267-03
PLASTIC

Rating	Symbol	1N5820	1N5821	1N5822	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	V
Non-Repetitive Peak Reverse Voltage	V_{RSM}	24	36	48	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectified Forward Current (2) $V_{R(equiv)} \leq 0.2\ V_{R(dc)}$, $T_L = 95^oC$ ($R_{\theta JA} = 28^oC/W$, P.C. Board Mounting, see Note 2)	I_O	← 3.0 →			A
Ambient Temperature Rated $V_{R(dc)}$, $P_{F(AV)} = 0$ $R_{\theta JA} = 28^oC/W$	T_A	90	85	80	°C
Non-Repetitive Peak Surge Current (Surge applied at rated load conditions, half wave, single phase 60 Hz, $T_L = 75^oC$)	I_{FSM}	← 80 (for one cycle) →			A
Operating and Storage Junction Temperature Range (Reverse Voltage applied)	T_J, T_{stg}	← −65 to +125 →			°C
Peak Operating Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	← 150 →			°C

***THERMAL CHARACTERISTICS** (Note 2)

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	28	°C/W

***ELECTRICAL CHARACTERISTICS** ($T_L = 25^oC$ unless otherwise noted) (2)

Characteristic	Symbol	1N5820	1N5821	1N5822	Unit
Maximum Instantaneous Forward Voltage (1)	v_F				V
(i_F = 1.0 Amp)		0.370	0.380	0.390	
(i_F = 3.0 Amp)		0.475	0.500	0.525	
(i_F = 9.4 Amp)		0.850	0.900	0.950	
Maximum Instantaneous Reverse Current @ Rated dc Voltage (1)	i_R				mA
$T_L = 25^oC$		2.0	2.0	2.0	
$T_L = 100^oC$		20	20	20	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%.
(2) Lead Temperature reference is cathode lead 1/32" from case.
*Indicates JEDEC Registered Data for 1N5820-22.

Rev 2

NOTE 1 – DETERMINING MAXIMUM RATINGS

Reverse power dissipation and the possibility of thermal runaway must be considered when operating this rectifier at reverse voltages above 0.1 V_{RWM}. Proper derating may be accomplished by use of equation (1).

$$T_{A(max)} = T_{J(max)} - R_{\theta JA}P_{F(AV)} - R_{\theta JA}P_{R(AV)} \quad (1)$$

where $T_{A(max)}$ = Maximum allowable ambient temperature
$T_{J(max)}$ = Maximum allowable junction temperature (125°C or the temperature at which thermal runaway occurs, whichever is lowest)
$P_{F(AV)}$ = Average forward power dissipation
$P_{R(AV)}$ = Average reverse power dissipation
$R_{\theta JA}$ = Junction-to-ambient thermal resistance

Figures 1, 2, and 3 permit easier use of equation (1) by taking reverse power dissipation and thermal runaway into consideration. The figures solve for a reference temperature as determined by equation (2).

$$T_R = T_{J(max)} - R_{\theta JA}P_{R(AV)} \quad (2)$$

Substituting equation (2) into equation (1) yields:

$$T_{A(max)} = T_R - R_{\theta JA}P_{F(AV)} \quad (3)$$

Inspection of equations (2) and (3) reveals that T_R is the ambient temperature at which thermal runaway occurs or where $T_J = 125°C$, when forward power is zero. The transition from one boundary condition to the other is evident on the curves of Figures 1, 2, and 3 as a difference in the rate of change of the slope in the vicinity of 115°C. The data of Figures 1, 2, and 3 is based upon dc conditions. For use in common rectifier circuits, Table 1 indicates suggested factors for an equivalent dc voltage to use for conservative design, that is:

$$V_{R(equiv)} = V_{(FM)} \times F \quad (4)$$

The factor F is derived by considering the properties of the various rectifier circuits and the reverse characteristics of Schottky diodes.

EXAMPLE: Find $T_{A(max)}$ for 1N5821 operated in a 12-volt dc supply using a bridge circuit with capacitive filter such that $I_{DC} = 2.0$ A ($I_{F(AV)} = 1.0$ A), $I_{(FM)}/I_{(AV)} = 10$, Input Voltage = 10 $V_{(rms)}$, $R_{\theta JA} = 40°C/W$.

Step 1. Find $V_{R(equiv)}$. Read F = 0.65 from Table 1,
$\therefore V_{R(equiv)} = (1.41)(10)(0.65) = 9.2$ V.

Step 2. Find T_R from Figure 2. Read $T_R = 108°C$
@ $V_R = 9.2$ V and $R_{\theta JA} = 40°C/W$.

Step 3. Find $P_{F(AV)}$ from Figure 6. **Read $P_{F(AV)} = 0.85$ W
@ $\frac{I_{(FM)}}{I_{(AV)}} = 10$ and $I_{F(AV)} = 1.0$ A.

Step 4. Find $T_{A(max)}$ from equation (3).
$T_{A(max)} = 108 - (0.85)(40) = 74°C$.

**Values given are for the 1N5821. Power is slightly lower for the 1N5820 because of its lower forward voltage, and higher for the 1N5822. Variations will be similar for the MBR-prefix devices, using $P_{F(AV)}$ from Figure 7.

TABLE 1 – VALUES FOR FACTOR F

Circuit	Half Wave		Full Wave, Bridge		Full Wave, Center Tapped*†	
Load	Resistive	Capacitive*	Resistive	Capacitive	Resistive	Capacitive
Sine Wave	0.5	1.3	0.5	0.65	1.0	1.3
Square Wave	0.75	1.5	0.75	0.75	1.5	1.5

*Note that $V_{R(PK)} \approx 2.0\ V_{in(PK)}$. †Use line to center tap voltage for V_{in}.

FIGURE 1 — MAXIMUM REFERENCE TEMPERATURE
1N5820

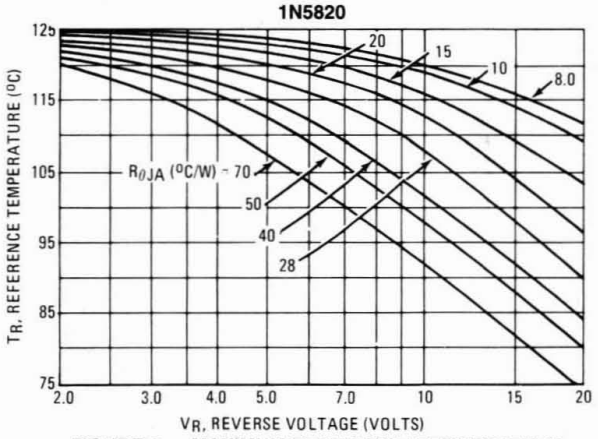

FIGURE 2 — MAXIMUM REFERENCE TEMPERATURE
1N5821

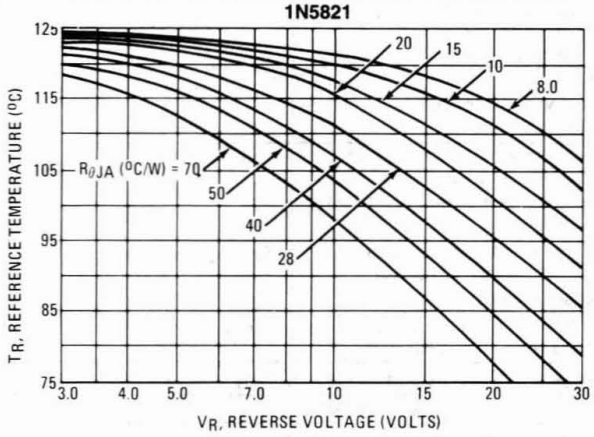

FIGURE 3 — MAXIMUM REFERENCE TEMPERATURE
1N5822

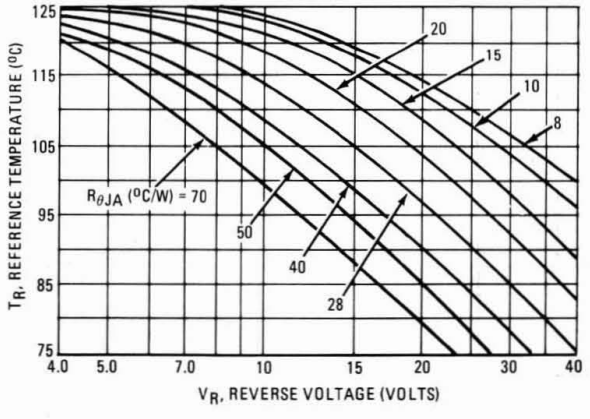

FIGURE 4 — STEADY-STATE THERMAL RESISTANCE

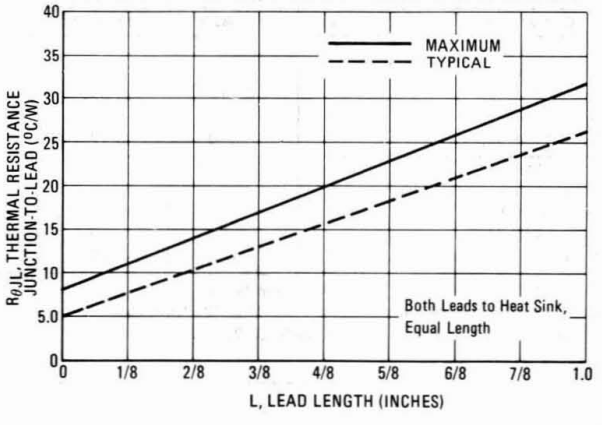

FIGURE 5 – THERMAL RESPONSE

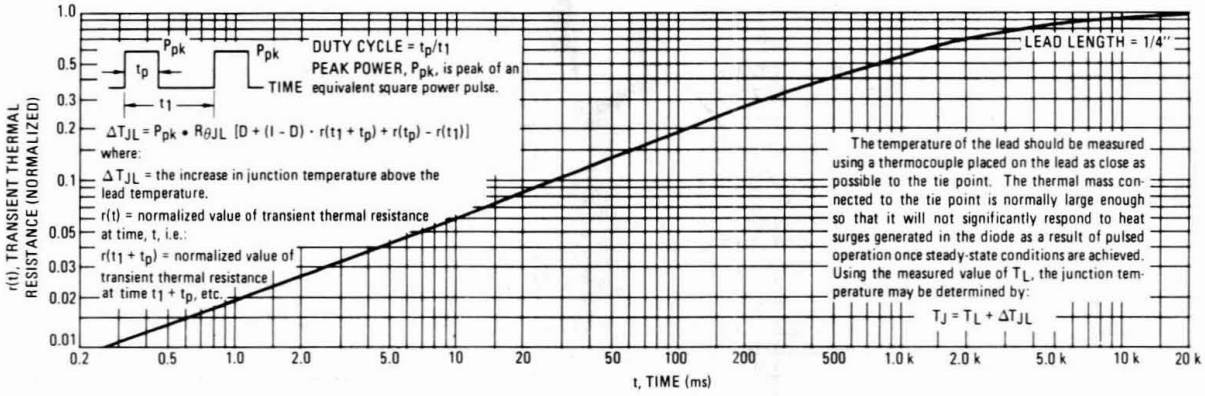

FIGURE 6 – FORWARD POWER DISSIPATION
1N5820-22

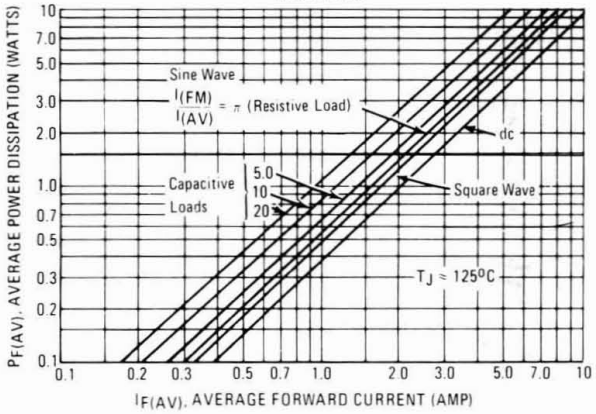

NOTE 3 – APPROXIMATE THERMAL CIRCUIT MODEL

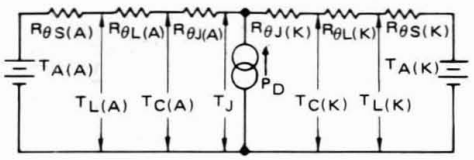

Use of the above model permits junction to lead thermal resistance for any mounting configuration to be found. For a given total lead length, lowest values occur when one side of the rectifier is brought as close as possible to the heat sink. Terms in the model signify:

T_A = Ambient Temperature T_C = Case Temperature
T_L = Lead Temperature T_J = Junction Temperature
$R_{\theta S}$ = Thermal Resistance, Heat Sink to Ambient
$R_{\theta L}$ = Thermal Resistance, Lead to Heat Sink
$R_{\theta J}$ = Thermal Resistance, Junction to Case
P_D = Total Power Dissipation = $P_F + P_R$
P_F = Forward Power Dissipation
P_R = Reverse Power Dissipation

(Subscripts (A) and (K) refer to anode and cathode sides, respectively.) Values for thermal resistance components are:

$R_{\theta L}$ = 42°C/W/in typically and 48°C/W/in maximum
$R_{\theta J}$ = 10°C/W typically and 16°C/W maximum

The maximum lead temperature may be found as follows:

$$T_L = T_{J(max)} - \Delta T_{JL}$$

where $\Delta T_{JL} \approx R_{\theta JL} \cdot P_D$

NOTE 2 – MOUNTING DATA

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering, or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

Mounting Method	Lead Length, L (in)				$R_{\theta JA}$
	1/8	1/4	1/2	3/4	
1	50	51	53	55	°C/W
2	58	59	61	63	°C/W
3	28				°C/W

Mounting Method 1
P.C. Board where available copper surface is small.



Mounting Method 2
Vector Push-In Terminals T-28



Mounting Method 3
P.C. Board with with 2-1/2" X 2-1/2" copper surface.



FIGURE 8 – TYPICAL FORWARD VOLTAGE

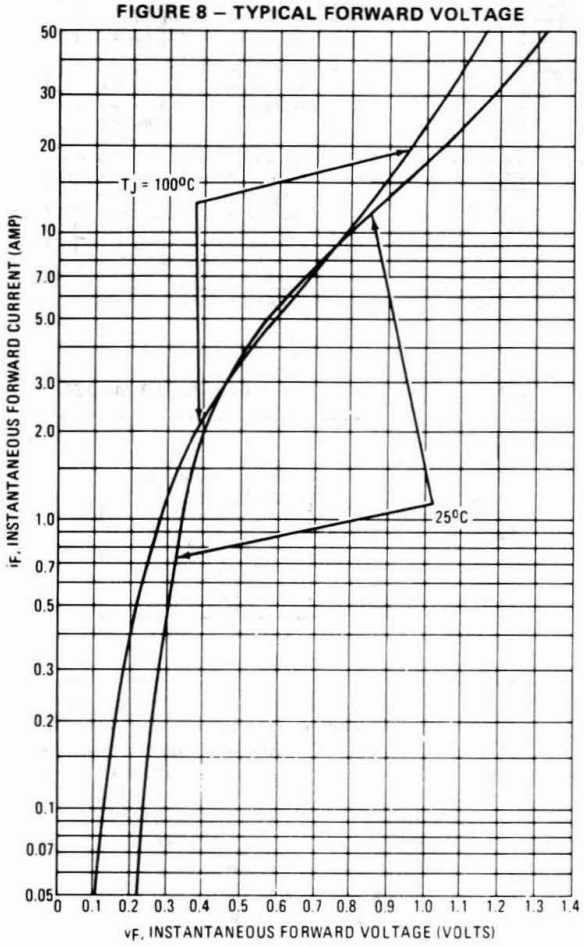

FIGURE 9 – MAXIMUM NON-REPETITIVE SURGE CURRENT

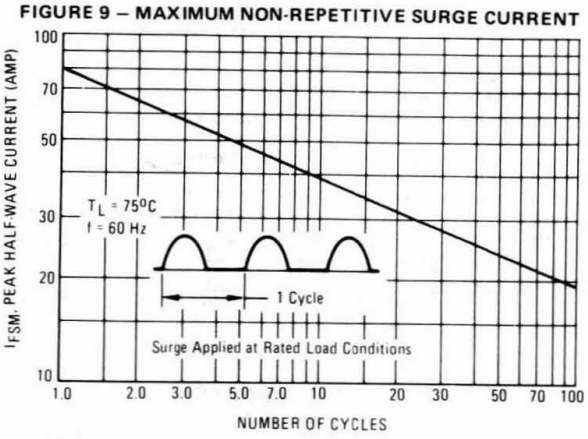

FIGURE 10 – TYPICAL REVERSE CURRENT

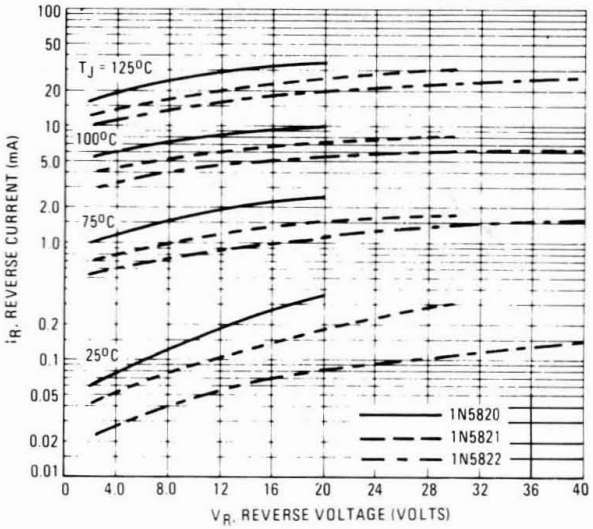

FIGURE 11 – TYPICAL CAPACITANCE

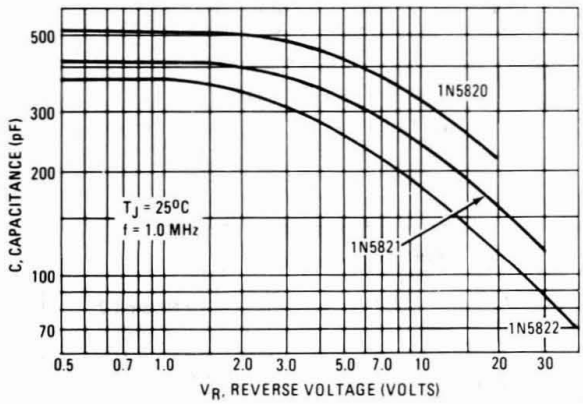

NOTE 4 – HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 11.)

MBR320 MBR340 MBR330 MBR350 MBR360

MBR340 and MBR360 are
Motorola Preferred Devices

Axial Lead Rectifiers

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

- Extremely Low v_F
- Low Power Loss/High Efficiency
- Highly Stable Oxide Passivated Junction
- Low Stored Charge, Majority Carrier Conduction

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.1 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 5,000 per bag.
- Available Tape and Reeled, 1500 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: B320, B330, B340, B350, B360

SCHOTTKY BARRIER RECTIFIERS

3.0 AMPERES
20, 30, 40, 50, 60 VOLTS

CASE 267-03
PLASTIC

MAXIMUM RATINGS

Rating	Symbol	MBR320	MBR330	MBR340	MBR350	MBR360	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	50	60	V
Average Rectified Forward Current T_A = 65°C ($R_{\theta JA}$ = 28°C/W, P.C. Board Mounting, see Note 3)	I_O	3.0					A
Nonrepetitive Peak Surge Current (2) (Surge applied at rated load conditions, half wave, single phase 60 Hz, T_L = 75°C)	I_{FSM}	80					A
Operating and Storage Junction Temperature Range (Reverse Voltage applied)	T_J, T_{stg}	−65 to 150					°C
Peak Operating Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	150					°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient, (see Note 3, Mounting Method 3)	$R_{\theta JA}$	28	°C/W

ELECTRICAL CHARACTERISTICS (T_L = 25°C unless otherwise noted)(2)

Characteristic	Symbol	MBR320	MBR330	MBR340	MBR350	MBR360	Unit
Maximum Instantaneous Forward Voltage (1) (i_F = 1.0 Amp) (i_F = 3.0 Amp) (i_F = 9.4 Amp)	v_F		0.500 0.600 0.850		0.600 0.740 1.080		V
Maximum Instantaneous Reverse Current @ Rated dc Voltage (1) T_L = 25°C T_L = 100°C	i_R			0.60 20			mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%.
(2) Lead Temperature reference is cathode lead 1/32″ from case.

Rev 1

MBR320, 330 AND 340

FIGURE 1 — TYPICAL FORWARD VOLTAGE

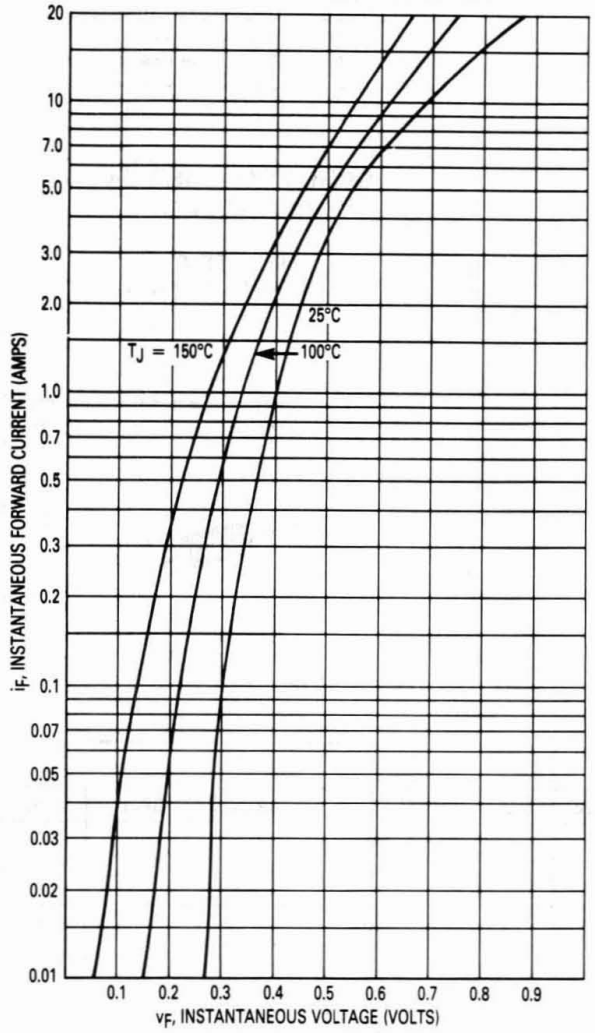

FIGURE 2 — TYPICAL REVERSE CURRENT*

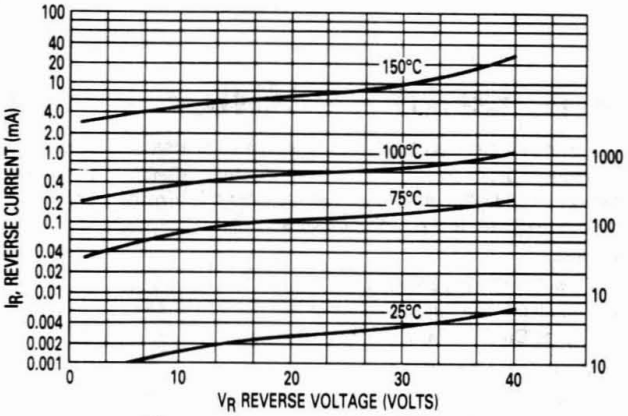

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R.

FIGURE 3 — CURRENT DERATING (MOUNTING METHOD #3 PER NOTE 3)

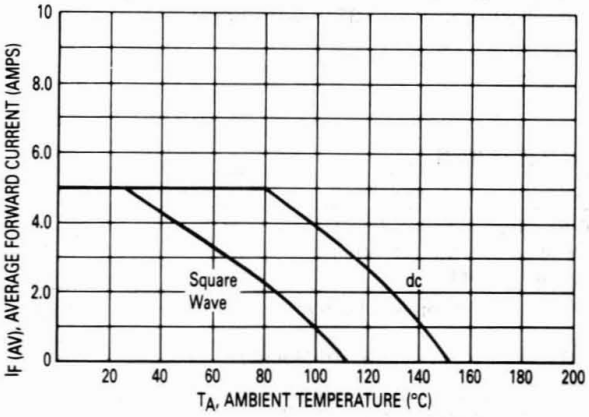

FIGURE 4 — POWER DISSIPATION

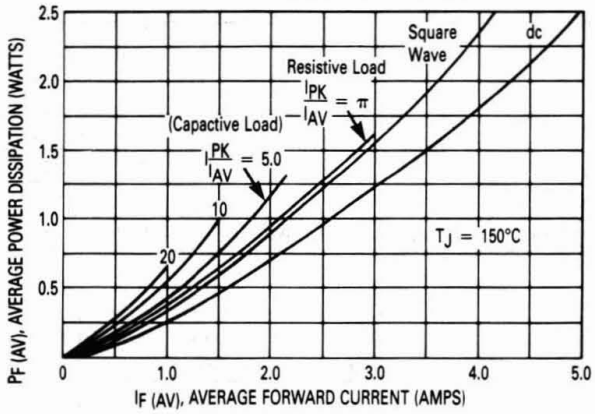

FIGURE 5 — TYPICAL CAPACITANCE

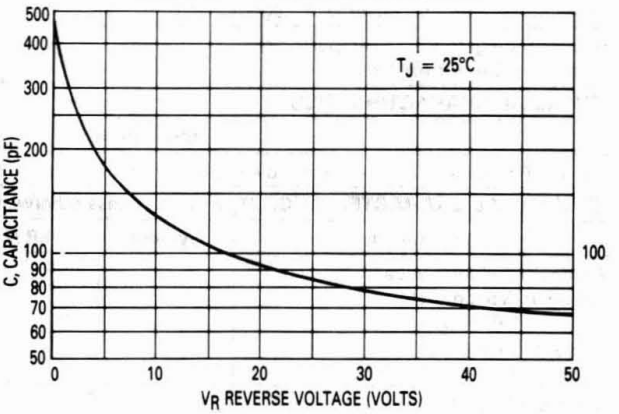

MBR350 AND 360

FIGURE 6 — TYPICAL FORWARD VOLTAGE

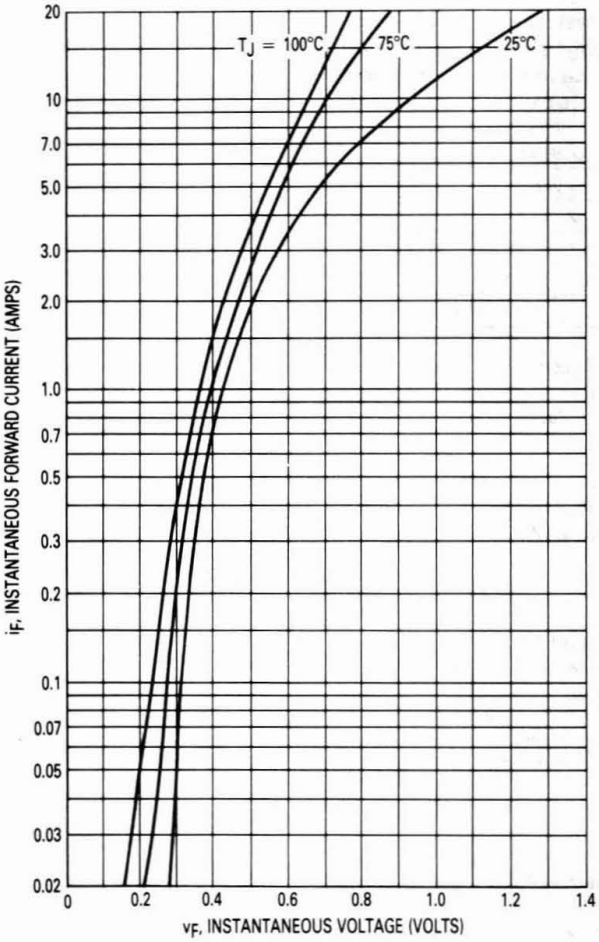

FIGURE 7 — TYPICAL REVERSE CURRENT*

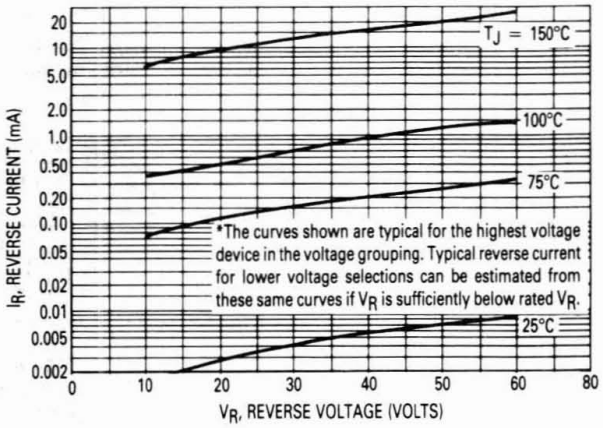

FIGURE 8 — CURRENT DERATING AMBIENT (MOUNTING METHOD #3 PER NOTE 3)

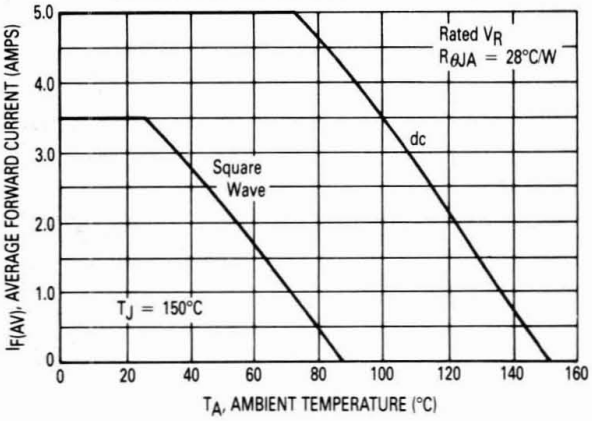

FIGURE 9 — POWER DISSIPATION

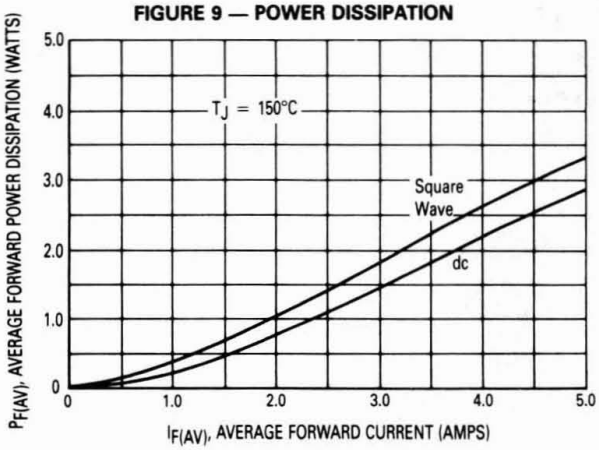

FIGURE 10 — TYPICAL CAPACITANCE

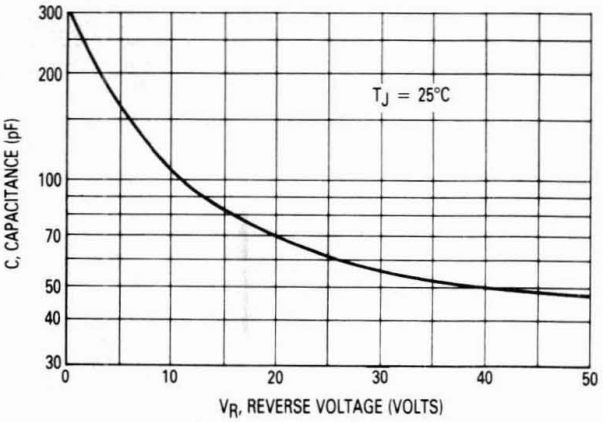

NOTE 3 — MOUNTING DATA

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering, or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

Mounting Method	Lead Length, L (in)				$R_{\theta JA}$
	1/8	1/4	1/2	3/4	
1	50	51	53	55	°C/W
2	58	59	61	63	°C/W
3	28				°C/W

Mounting Method 1
P.C. Board where available copper surface is small.



Mounting Method 2
Vector Push-In Terminals T-28



Mounting Method 3
P.C. Board with 2-1/2" × 2-1/2" copper surface.



Axial Lead Rectifiers

MBR370
MBR380
MBR390
MBR3100

MBR3100 is a
Motorola Preferred Device

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

- Low Reverse Current
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency
- Highly Stable Oxide Passivated Junction
- Guard-Ring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- High Surge Capacity

SCHOTTKY BARRIER RECTIFIERS
3 AMPERES
70, 80, 90, 100 VOLTS



CASE 267-03
PLASTIC

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.1 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 5,000 per bag.
- Available Tape and Reeled, 1500 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: B370, B380, B390, B3100

MAXIMUM RATINGS

Rating	Symbol	MBR370	MBR380	MBR390	MBR3100	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	70	80	90	100	V
Average Rectified Forward Current T_A = 100°C ($R_{\theta JA}$ = 28°C/W, P.C. Board Mounting, see Note 1)	I_O	3				A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, half-wave, single phase, 60 Hz)	I_{FSM}	150				A
Operating and Storage Junction Temperature Range (Reverse Voltage applied)	T_J, T_{stg}	−65 to +150				°C
Voltage Rate of Change (Rated V_R)	dv/dt	10				V/ns

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient (see Note 1, Mounting Method 3)	$R_{\theta JA}$	28	°C/W

ELECTRICAL CHARACTERISTICS (T_L = 25°C unless otherwise noted)

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage* (i_F = 3 Amps, T_L = 25°C) (i_F = 3 Amps, T_L = 100°C)	v_F	 0.79 0.69	V
Maximum Instantaneous Reverse Current @ Rated dc Voltage* (T_L = 25°C) (T_L = 100°C)	i_R	 0.6 20	mA

*Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 1

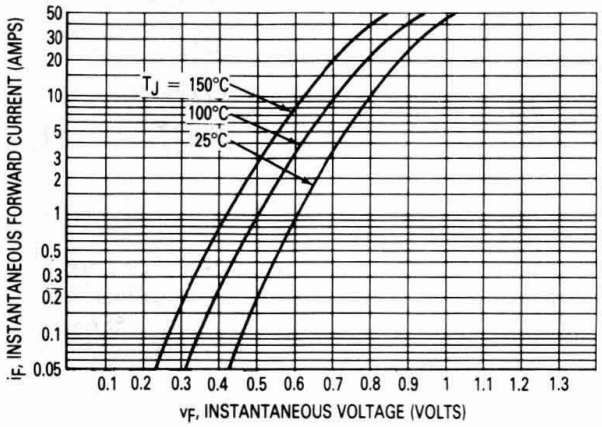

Figure 1. Typical Forward Voltage

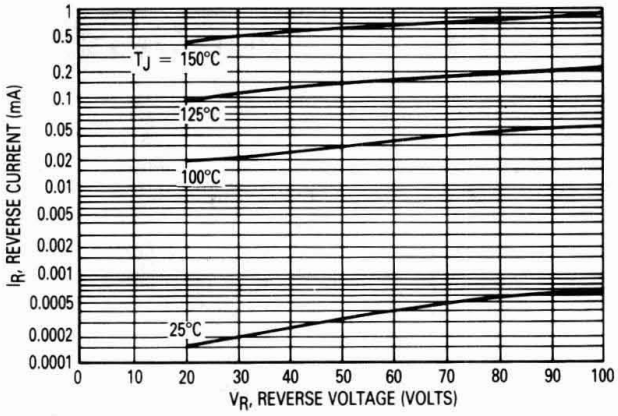

Figure 2. Typical Reverse Current*

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R.

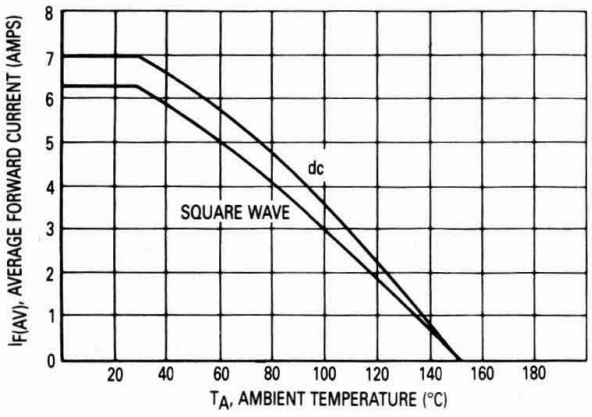

Figure 3. Current Derating (Mounting method 3 per note 1.)

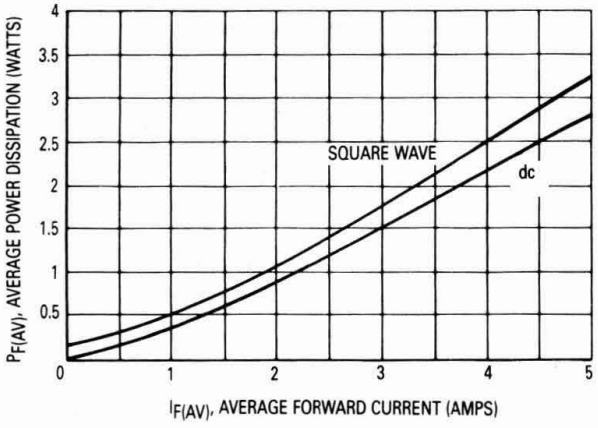

Figure 4. Power Dissipation

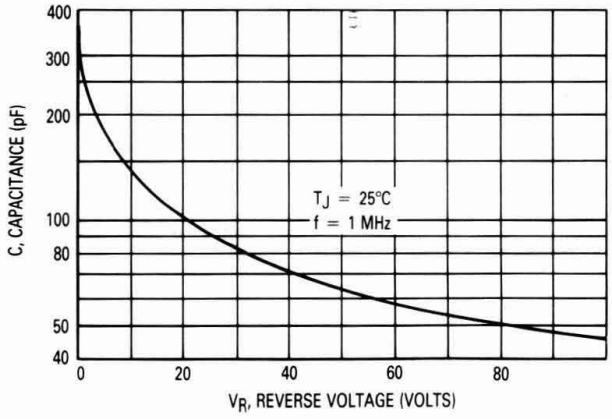

Figure 5. Typical Capacitance

NOTE 1 — MOUNTING DATA:

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.

Typical Values for $R_{\theta JA}$ in Still Air

Mounting Method	Lead Length, L (in)				$R_{\theta JA}$
	1/8	1/4	1/2	3/4	
1	50	51	53	55	°C/W
2	58	59	61	63	°C/W
3			28		°C/W

Mounting Method 1
P.C. Board where available copper surface is small.



Mounting Method 2
Vector Push-In Terminals T-28



Mounting Method 3
P.C. Board with 2-1/2" x 2-1/2" copper surface.



MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

1N5823, 1N5824 1N5825

1N5823 and 1N5825 are
Motorola Preferred Devices

Designer's Data Sheet

Power Rectifiers

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features chrome barrier metal, epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free-wheeling diodes, and polarity-protection diodes.

- Extremely Low v_F
- Low Power Loss/High Efficiency
- Low Stored Charge, Majority Carrier Conduction

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 2.4 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Polarity: Cathode to Case
- Shipped 50 units per tray
- Marking: 1N5823, 1N5824, 1N5825

SCHOTTKY BARRIER RECTIFIERS

5 AMPERE
20, 30, 40 VOLTS



CASE 60-01
METAL

***MAXIMUM RATINGS**

Rating	Symbol	1N5823	1N5824	1N5825	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	Volts
Non-Repetitive Peak Reverse Voltage	V_{RSM}	24	36	48	Volts
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	Volts
Average Rectified Forward Current $V_{R(equiv)} \leq 0.2\ V_{R\ (dc)}$, T_C = 75°C $V_{R(equiv)} \leq 0.2\ V_{R\ (dc)}$, T_L = 80°C $R_{\theta JA}$ = 25°C/W, P.C. Board Mounting, See Note 3)	I_O	← 15 →			Amp ← 5.0 →
Ambient Temperature Rated $V_{R\ (dc)}$, $P_{F(AV)}$ = 0 $R_{\theta JA}$ = 25°C/W	T_A	65	60	55	°C
Non-Repetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase 60 Hz)	I_{FSM}	← 500 (for 1 cycle) →			Amp
Operating and Storage Junction Temperature Range (Reverse Voltage applied)	T_J, T_{stg}	← −65 to +125 →			°C
Peak Operating Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	← 150 →			°C

***THERMAL CHARACTERISTICS**

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.0	°C/W

***ELECTRICAL CHARACTERISTICS** (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	1N5823	1N5824	1N5825	Unit
Maximum Instantaneous Forward Voltage (1) (i_F = 3.0 Amp) (i_F = 5.0 Amp) (i_F = 15.7 Amp)	v_F	 0.330 0.360 0.470	 0.340 0.370 0.490	 0.350 0.380 0.520	Volts
Maximum Instantaneous Reverse Current @ rated dc Voltage T_C = 25°C T_C = 100°C	i_R	 10 100	 10 125	 10 150	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0% *Indicates JEDEC Registered Data for 1N5823–1N5825

Rev 1

NOTE 1: DETERMINING MAXIMUM RATINGS

Reverse power dissipation and the possibility of thermal runaway must be considered when operating this rectifier at reverse voltages above 0.1 V_{RWM}. Proper derating may be accomplished by use of equation (1):

$$T_{A(max)} = T_{J(max)} - R_{\theta JA} P_{F(AV)} - R_{\theta JA} P_{R(AV)} \quad (1)$$

where

$T_{A(max)}$ = Maximum allowable ambient temperature

$T_{J(max)}$ = Maximum allowable junction temperature (125°C or the temperature at which thermal runaway occurs, whichever is lowest).

$P_{F(AV)}$ = Average forward power dissipation

$P_{R(AV)}$ = Average reverse power dissipation

$R_{\theta JA}$ = Junction-to-ambient thermal resistance

Figures 1, 2 and 3 permit easier use of equation (1) by taking reverse power dissipation and thermal runaway into consideration. The figures solve for a reference temperature as determined by equation (2):

$$T_R = T_{J(max)} - R_{\theta JA} P_{R(AV)} \quad (2)$$

Substituting equation (2) into equation (1) yields:

$$T_{A(max)} = T_R - R_{\theta JA} P_{F(AV)} \quad (3)$$

Inspection of equations (2) and (3) reveals that T_R is the ambient temperature at which thermal runaway occurs or where T_J = 125°C, when forward power is zero. The transition from one boundary condition to the other is evident on the curves of Figures 1, 2 and 3 as a difference in the rate of change of the slope in the vicinity of 115°C. The data of Figures 1, 2 and 3 is based upon dc conditions. For use in common rectifier circuits, Table I indicates suggested factors for an equivalent dc voltage to use for conservative design; i.e.:

$$V_{R(equiv)} = V_{IN(PK)} \times F \quad (4)$$

The Factor F is derived by considering the properties of the various rectifier circuits and the reverse characteristics of Schottky diodes.

Example: Find $T_{A(max)}$ for 1N5825 operated in a 12-Volt dc supply using a bridge circuit with capacitive filter such that I_{DC} = 10 A ($I_{F(AV)}$ = 5 A), $I_{(PK)}/I_{(AV)}$ = 10, Input Voltage = 10 V(rms), $R_{\theta JA}$ = 10°C/W.

Step 1: Find $V_{R(equiv)}$. Read F = 0.65 from Table I ∴ $V_{R(equiv)} = (1.41)(10)(0.65) = 9.2$ V

Step 2: Find T_R from Figure 3. Read T_R = 113°C @ V_R = 9.2 V & $R_{\theta JA}$ = 10°C/W.

Step 3: Find $P_{F(AV)}$ from Figure 4.** Read $P_{F(AV)}$ = 5.5 W @ $\frac{I_{(PK)}}{I_{(AV)}}$ = 10 & $I_{F(AV)}$ = 5 A

Step 4: Find $T_{A(max)}$ from equation (3). $T_{A(max)} = 113 - (10)(5.5) = 58$°C.

** Value given are for the 1N5825. Power is slightly lower for the other units because of their lower forward voltage.

TABLE I – VALUES FOR FACTOR F

Circuit	Half Wave		Full Wave, Bridge		Full Wave, Center Tapped *†	
Load	Resistive	Capacitive*	Resistive	Capacitive	Resistive	Capacitive
Sine Wave	0.5	1.3	0.5	0.65	1.0	1.3
Square Wave	0.75	1.5	0.75	0.75	1.5	1.5

*Note that $V_{R(PK)} \approx 2\ V_{in(PK)}$ †Use line to center tap voltage for V_{in}.

FIGURE 1 – MAXIMUM REFERENCE TEMPERATURE – 1N5823

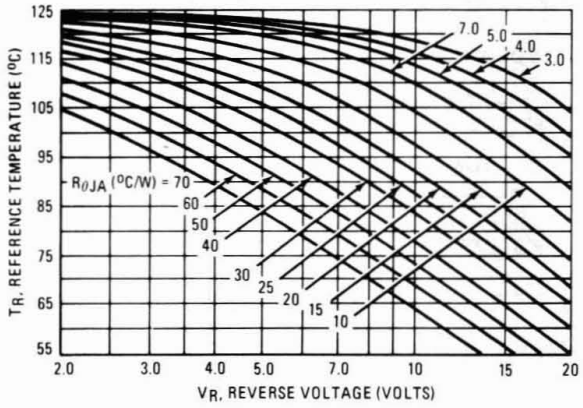

FIGURE 2 – MAXIMUM REFERENCE TEMPERATURE – 1N5824

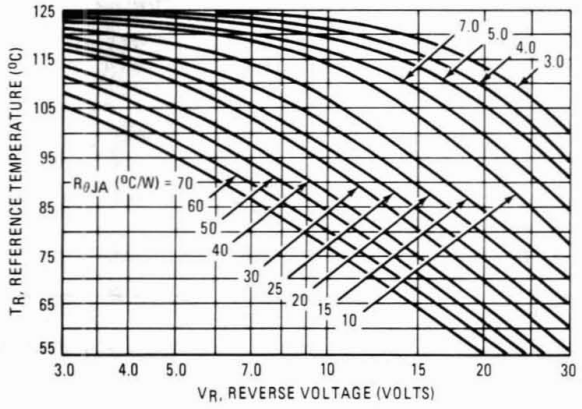

FIGURE 3 – MAXIMUM REFERENCE TEMPERATURE 1N5825 AND MBR5825H, H1

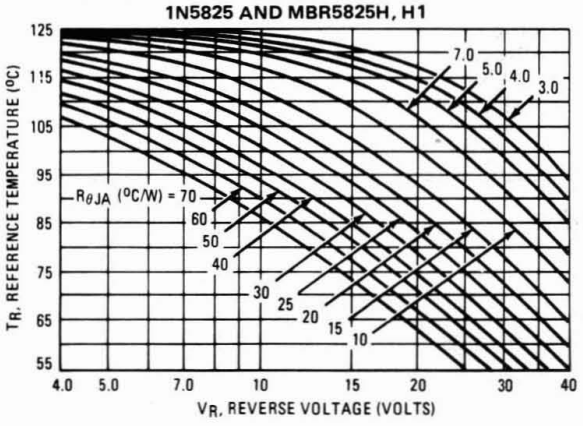

FIGURE 4 – FORWARD POWER DISSIPATION

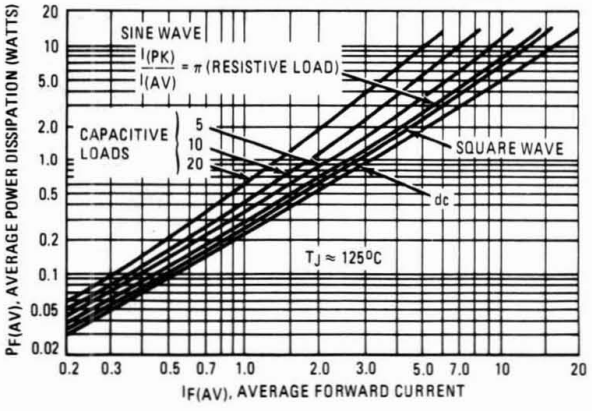

THERMAL CHARACTERISTICS

FIGURE 5 – THERMAL RESPONSE

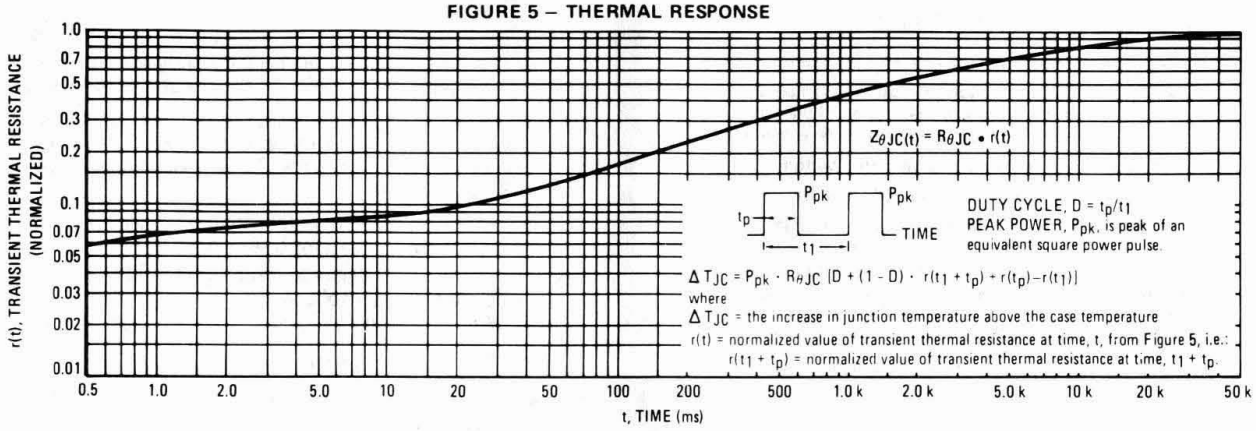

3

NOTE 2 – FINDING JUNCTION TEMPERATURE



DUTY CYCLE, D = t_p/t_1
PEAK POWER, P_{pk}, is peak of an equivalent square power pulse.

To determine maximum junction temperature of the diode in a given situation, the following procedure is recommended:

The temperature of the case should be measured using a thermocouple placed on the case at the temperature reference point (see Note 3). The thermal mass connected to the case is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of T_C, the junction temperature may be determined by:

$$T_J = T_C + \Delta T_{JC}$$

where ΔT_{JC} is the increase in junction temperature above the case temperature. It may be determined by:

$$\Delta T_{JC} = P_{pk} \cdot R_{\theta JC} [D + (1 - D) \cdot r(t_1 + t_p) + r(t_p) - r(t_1)]$$

where
r(t) = normalized value of transient thermal resistance at time, t, from Figure 5, i.e.:
$r(t_1 + t_p)$ = normalized value of transient thermal resistance at time $t_1 + t_p$.

NOTE 3 – MOUNTING DATA

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

MOUNTING METHOD	LEAD LENGTH, L (IN) 1/4	LEAD LENGTH, L (IN) 1	$R_{\theta JA}$
1	55	60	°C/W
2	65	70	°C/W
3	25		°C/W

MOUNTING METHOD 1



MOUNTING METHOD 2



Vector pin mounting

MOUNTING METHOD 3

P. C. Board with 2 1/2" x 2 1/2" copper surface



FIGURE 6 – APPROXIMATE THERMAL CIRCUIT MODEL

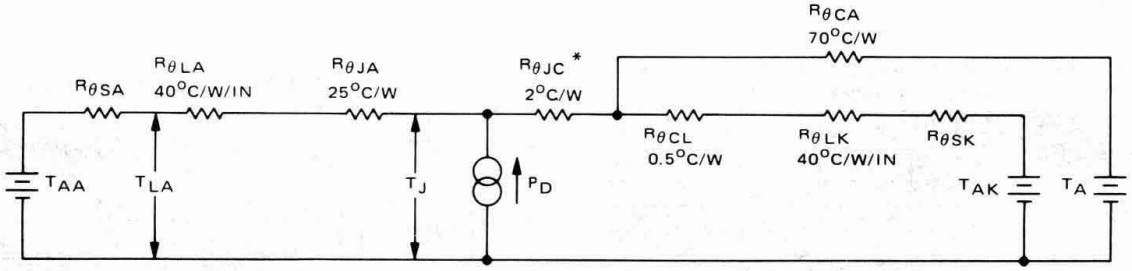

Use of the above model permits calculation of average junction temperature for any mounting situation. Lowest values of thermal resistance will occur when the cathode lead is brought as close as possible to a heat dissipator; as heat conduction through the anode lead is small. Terms in the model are defined as follows:

***Case temperature reference is at cathode end.**

TEMPERATURES

T_A = Ambient
T_{AA} = Anode Heat Sink Ambient
T_{AK} = Cathode Heat Sink Ambient
T_{LA} = Anode Lead
T_{LK} = Cathode Lead
T_J = Junction

THERMAL RESISTANCES

$R_{\theta CA}$ = Case to Ambient
$R_{\theta SA}$ = Anode Lead Heat Sink to Ambient
$R_{\theta SK}$ = Cathode Lead Heat Sink to Ambient
$R_{\theta LA}$ = Anode Lead
$R_{\theta LK}$ = Cathode Lead
$R_{\theta CL}$ = Case to Cathode Lead
$R_{\theta JC}$ = Junction to Case
$R_{\theta JA}$ = Junction to Anode Lead (S bend)

FIGURE 7 – TYPICAL FORWARD VOLTAGE

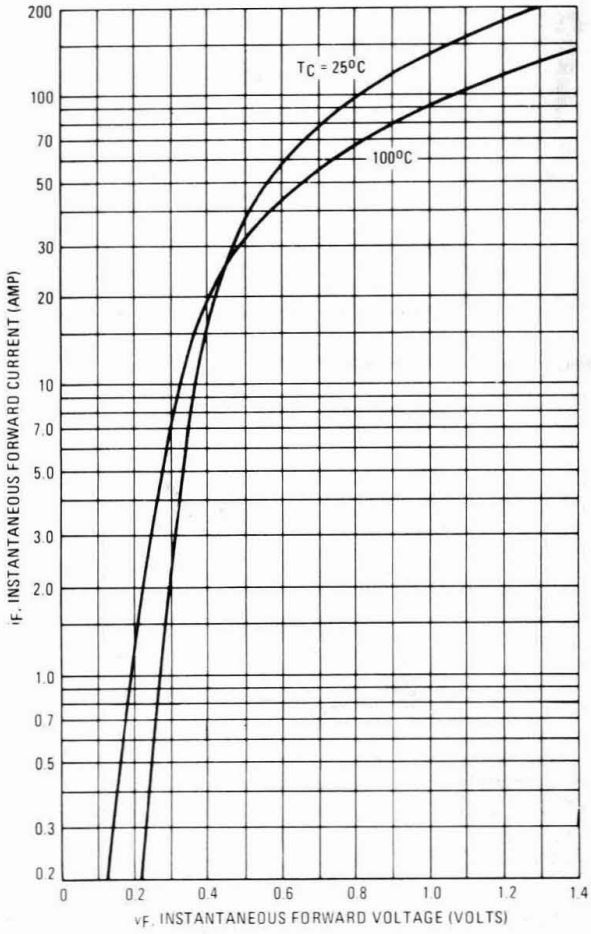

FIGURE 8 – MAXIMUM SURGE CAPABILITY

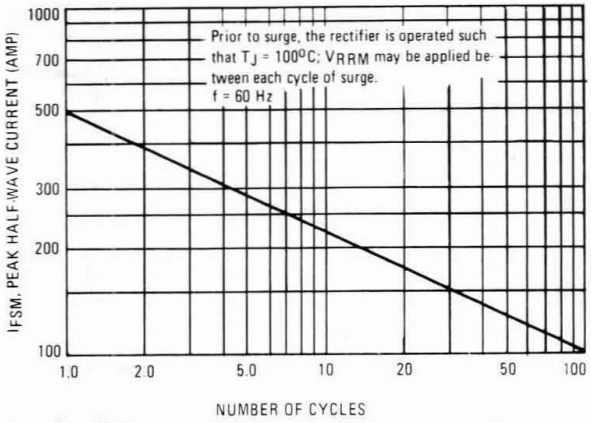

FIGURE 9 – TYPICAL REVERSE CURRENT

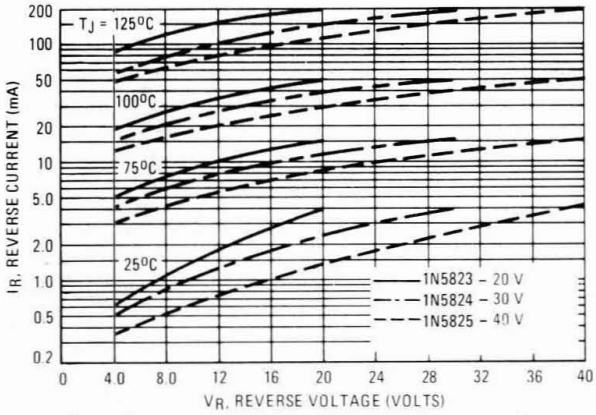

FIGURE 10 – CAPACITANCE

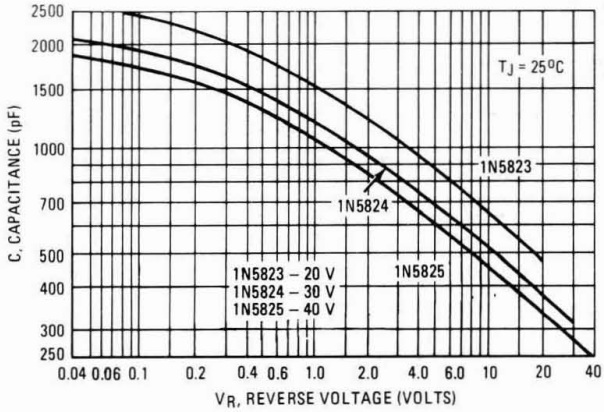

NOTE 4 – HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 10).

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

MBR1535CT
MBR1545CT

MBR1545CT is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Center-Tap Configuration
- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche
- Epoxy Meets UL94, VO at 1/8″

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B1535, B1545

SCHOTTKY BARRIER RECTIFIERS

15 AMPERES
35 and 45 VOLTS



CASE 221A-06
TO-220AB
PLASTIC

MAXIMUM RATINGS

Rating		Symbol	MBR1535CT	MBR1545CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	35	45	Volts
Average Rectified Forward Current T_C = 105°C (Rated V_R)	Per Diode Per Device	$I_{F(AV)}$	7.5 15	7.5 15	Amps
Peak Repetitive Forward Current, T_C = 105°C (Rated V_R, Square Wave, 20 kHz) Per Diode		I_{FRM}	15	15	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	150	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)		I_{RRM}	1.0	1.0	Amps
Operating Junction Temperature		T_J	-65 to +150	-65 to +150	°C
Storage Temperature		T_{stg}	-65 to +175	-65 to +175	°C
Voltage Rate of Change (Rated V_R)		dv/dt	1000	10000	V/μs

THERMAL CHARACTERISTICS PER DIODE

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.0	3.0	°C/W
Maximum Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	60	60	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Maximum Instantaneous Forward Voltage (1) (i_F = 7.5 Amp, T_C = 125°C) (i_F = 15 Amp, T_C = 125°C) (i_F = 15 Amp, T_C = 25°C)	v_F	 0.57 0.72 0.84	 0.57 0.72 0.84	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 15 0.1	 15 0.1	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 1

FIGURE 1 — TYPICAL FORWARD VOLTAGE

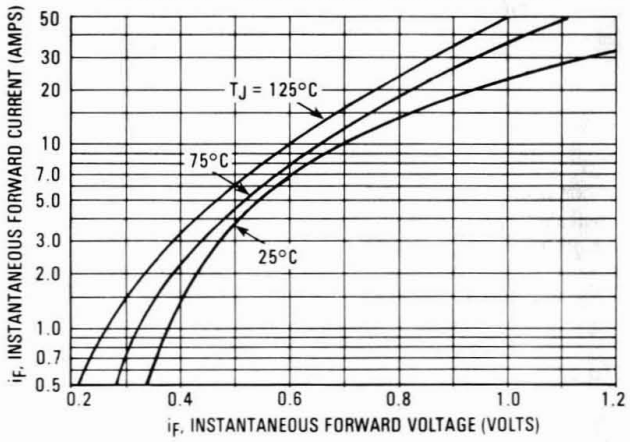

FIGURE 2 — TYPICAL REVERSE CURRENT

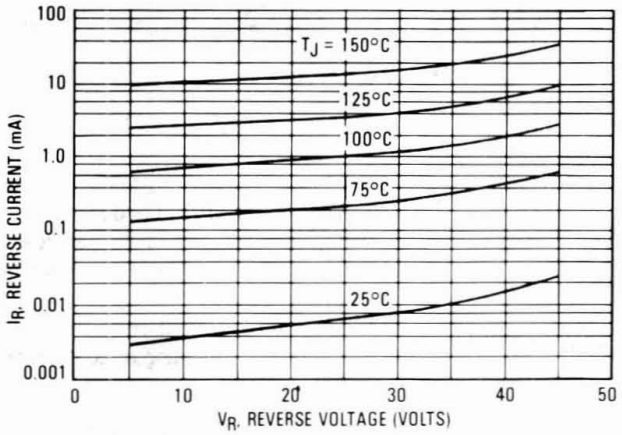

3

FIGURE 3 — CURRENT DERATING, CASE

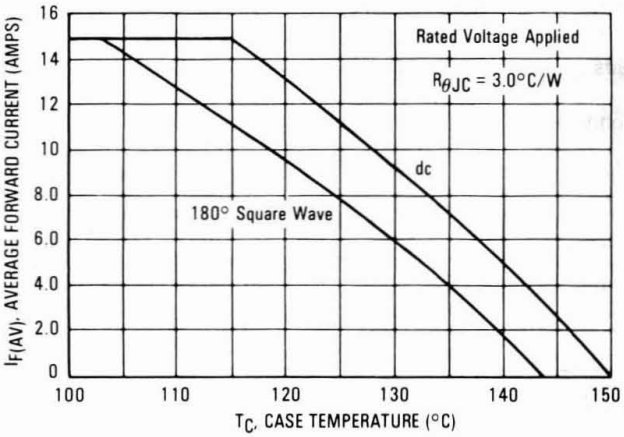

FIGURE 4 — CURRENT DERATING, AMBIENT

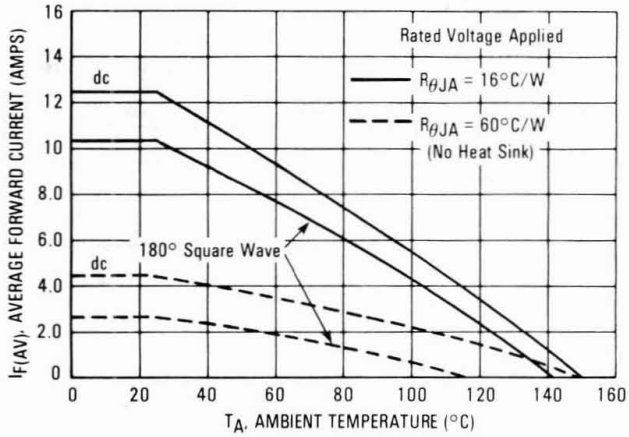

FIGURE 5 — POWER DISSIPATION

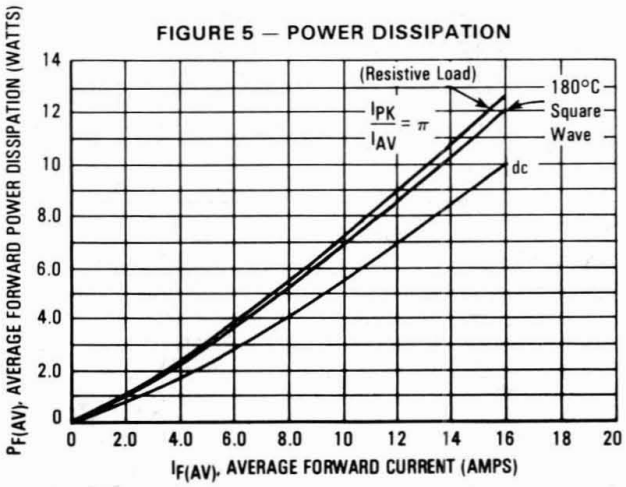

SWITCHMODE Dual Schottky Power Rectifiers

MBR2015CTL
MBR2030CTL

MBR2030CTL is a Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 20 AMPERES 15 and 30 VOLTS

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use as rectifiers in very low-voltage, high-frequency switching power supplies, free wheeling diodes and polarity protection diodes.

- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop (0.4 Max @ 10 A, T_C = 150°C)
- Matched Dual Die Construction (10 A per Leg or 20 A per Package)
- High Junction Temperature Capability
- High dv/dt Capability
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection
- Epoxy Meets UL94, VO at 1/8″





CASE 221A-06
TO-220AB

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B2015, B2030

MAXIMUM RATINGS (Per Leg)

Rating	Symbol	MBR2015CTL	MBR2030CTL	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	15	30	Volts
Average Rectified Forward Current	$I_{F(AV)}$	10		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150		Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0		Amp
Operating Junction Temperature	T_J	−65 to +150		°C
Storage Temperature	T_{stg}	−65 to +175		°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000		V/μs

THERMAL CHARACTERISTICS (Per Leg)

Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.0		°C/W

ELECTRICAL CHARACTERISTICS (Per Leg)

Maximum Instantaneous Forward Voltage (1) (i_F = 10 Amp, T_C = 25°C) (i_F = 10 Amp, T_C = 150°C) (i_F = 20 Amp, T_C = 25°C) (i_F = 20 Amp, T_C = 150°C)	v_F	 0.52 0.40 0.58 0.48		Volts
Maximum Instantaneous Reverse Current (1) (Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 100°C) (Rated DC Voltage, T_C = 125°C)	i_R	 5.0 40 75		mA

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

Rev 2

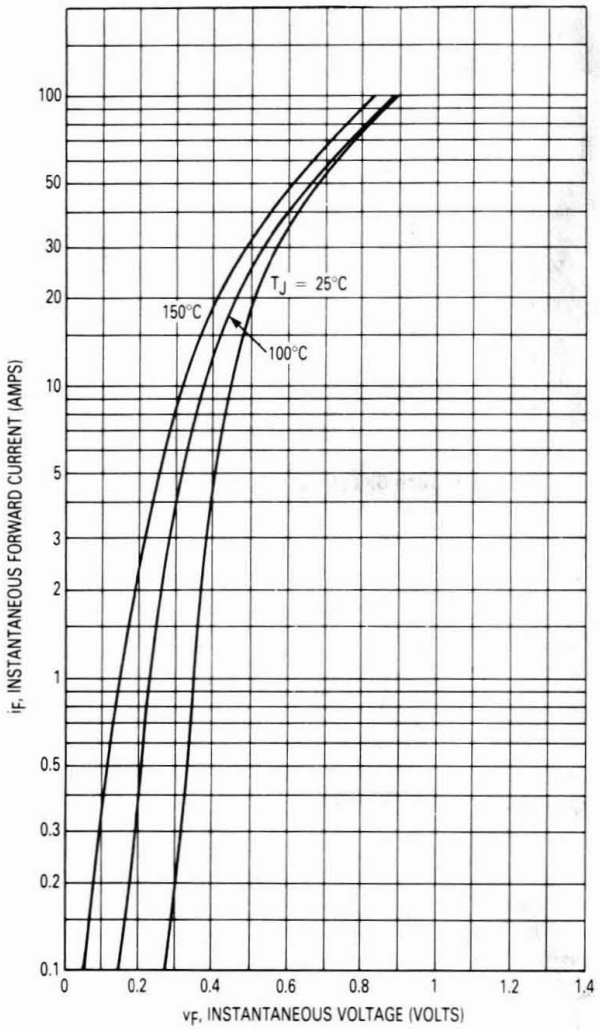

Figure 1. Typical Forward Voltage (Per Leg)

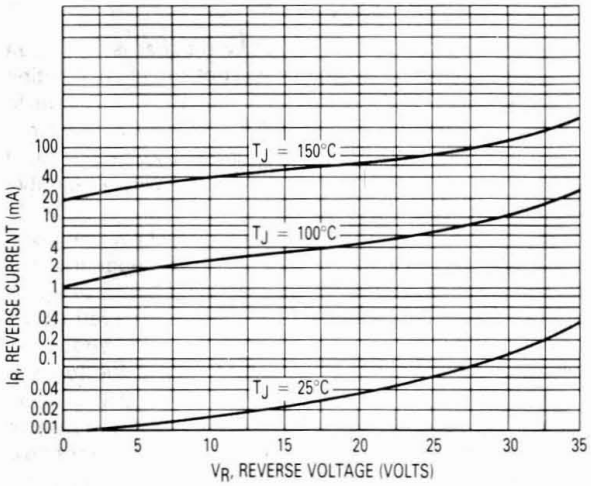

Figure 2. Typical Reverse Current (Per Leg)

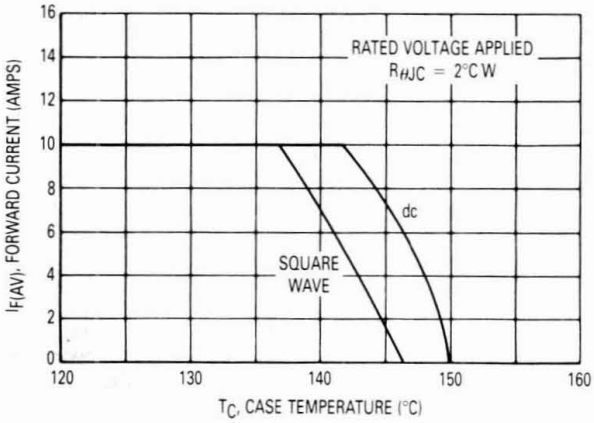

Figure 3. Current Derating, Case

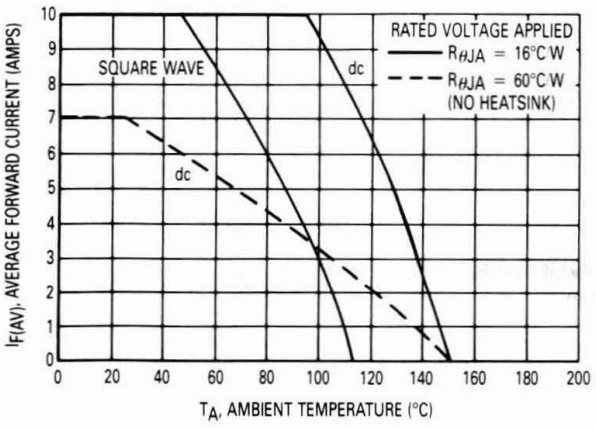

Figure 4. Current Derating, Ambient

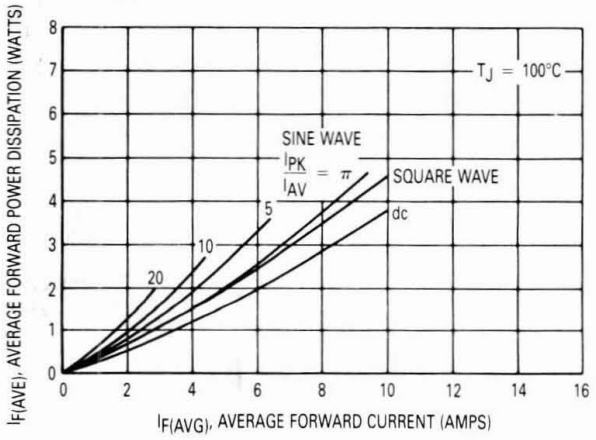

Figure 5. Forward Power Dissipation

HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 6.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 percent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

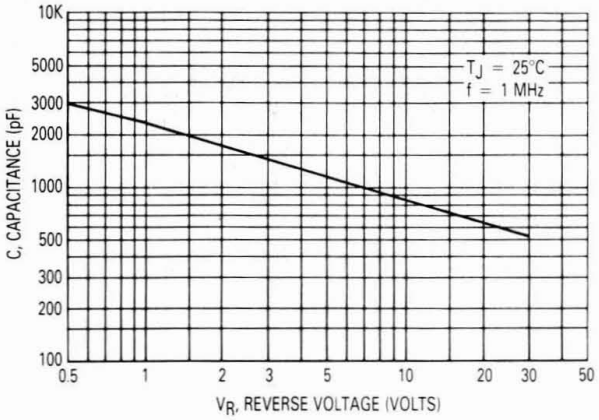

Figure 6. Typical Capacitance

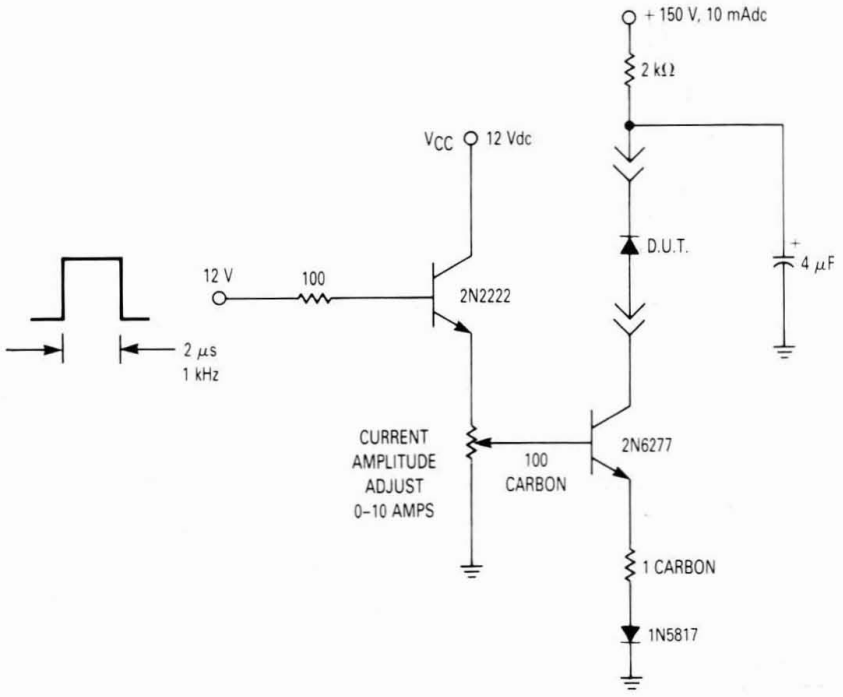

Figure 7. Test Circuit for dv/dt and Reverse Surge Current

MBR2035CT
MBR2045CT

MBR2045CT is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche
- Epoxy Meets UL94, VO at 1/8″

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B2035, B2045

SCHOTTKY BARRIER
RECTIFIERS

20 AMPERES
35 and 45 VOLTS



CASE 221A-06
TO-220AB
PLASTIC

MAXIMUM RATINGS

Rating	Symbol	MBR2035CT	MBR2045CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 135°C	$I_{F(AV)}$	20	20	Amps
Peak Repetitive Forward Current Per Diode Leg (Rated V_R, Square Wave, 20 kHz) T_C = 135°C	I_{FRM}	20	20	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz) See Figure 11	I_{RRM}	1.0	1.0	Amps
Operating Junction Temperature	T_J	-65 to +150	-65 to +150	°C
Storage Temperature	T_{stg}	-65 to +175	-65 to +175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	10000	V/μs

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.0	2.0	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 10 Amp, T_C = 125°C) (i_F = 20 Amp, T_C = 125°C) (i_F = 20 Amp, T_C = 25°C)	v_F	 0.57 0.72 0.84	 0.57 0.72 0.84	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 15 0.1	 15 0.1	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 2

FIGURE 1 —MAXIMUM FORWARD VOLTAGE

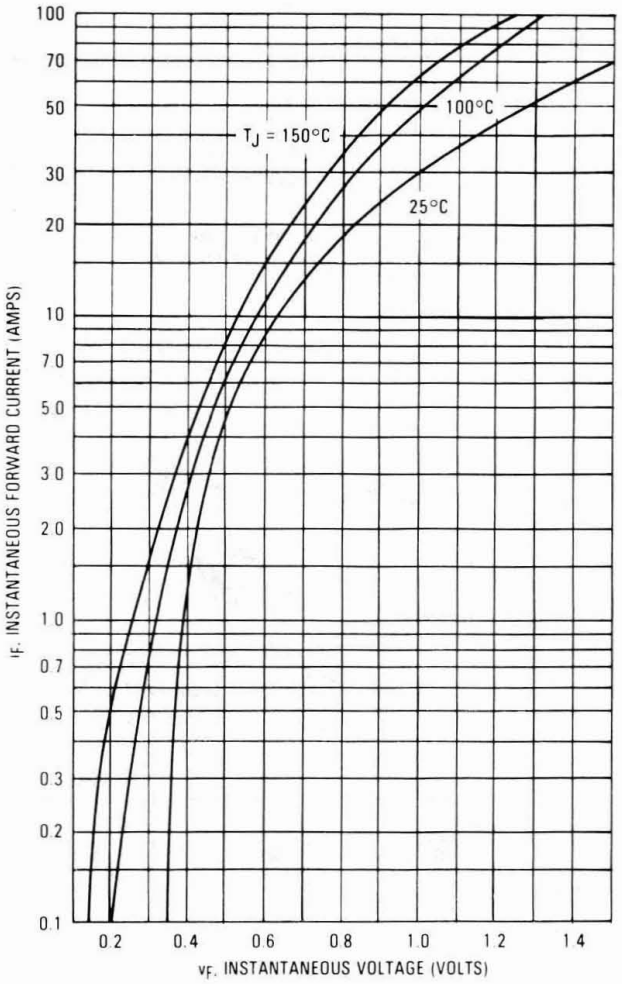

FIGURE 2 —TYPICAL FORWARD VOLTAGE

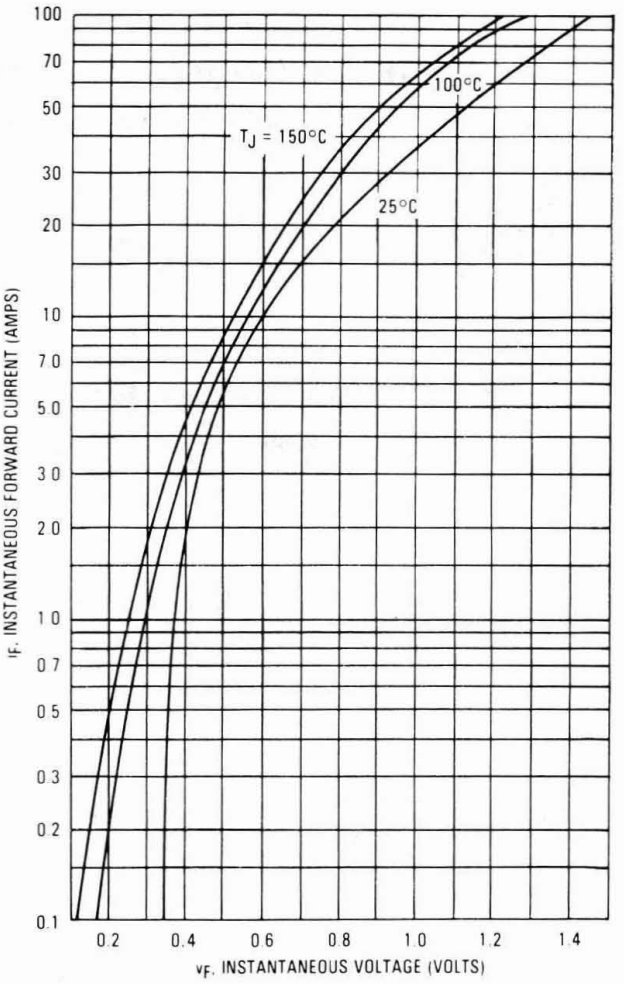

FIGURE 3 — MAXIMUM REVERSE CURRENT

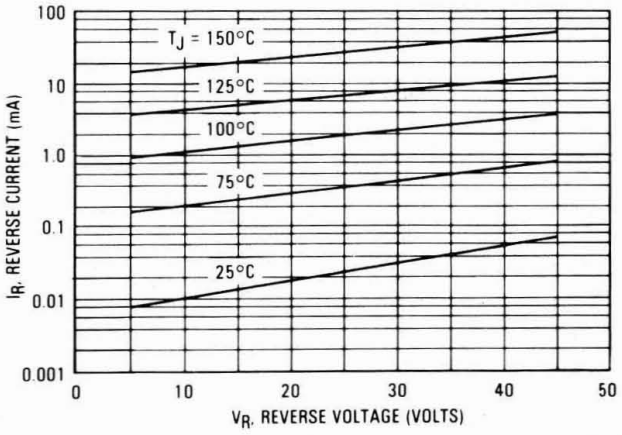

FIGURE 4 — MAXIMUM SURGE CAPABILITY

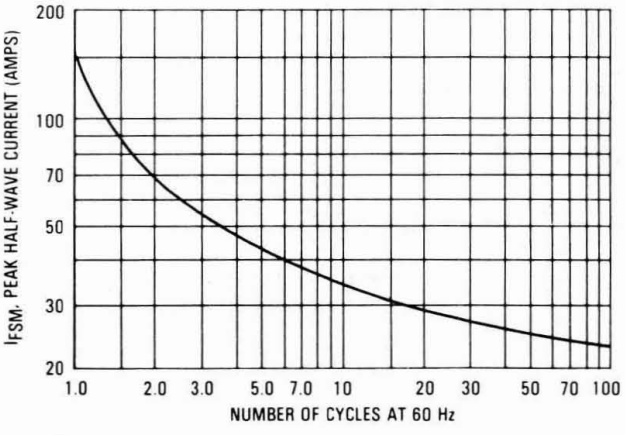

FIGURE 5 — CURRENT DERATING, INFINITE HEATSINK

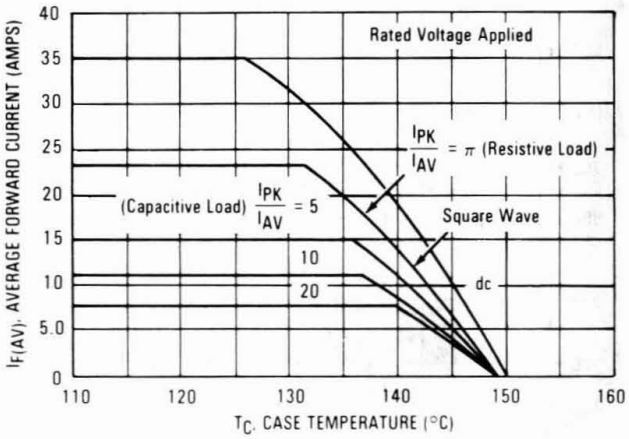

FIGURE 6 — CURRENT DERATING, $R_{\theta JA}$ = 16° C/W

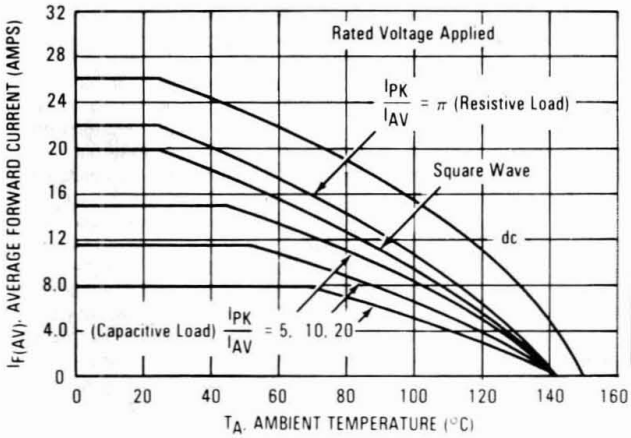

FIGURE 7 — FORWARD POWER DISSIPATION

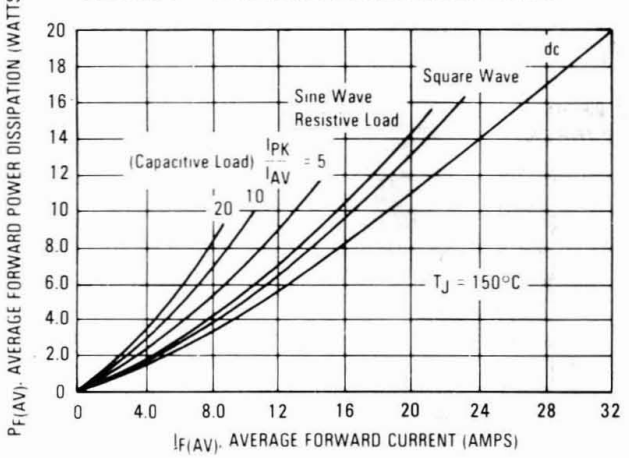

FIGURE 8 — CURRENT DERATING, FREE AIR

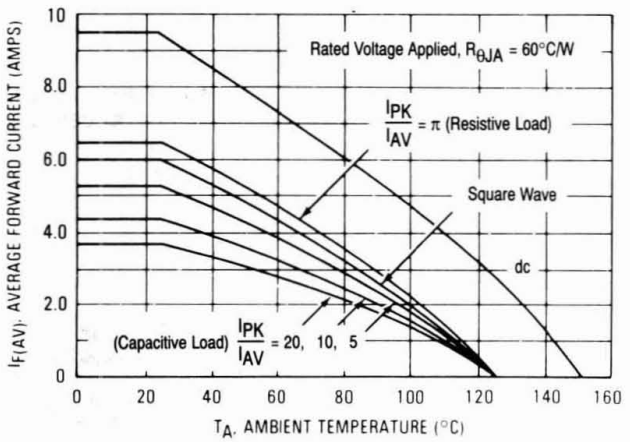

FIGURE 9 — THERMAL RESPONSE

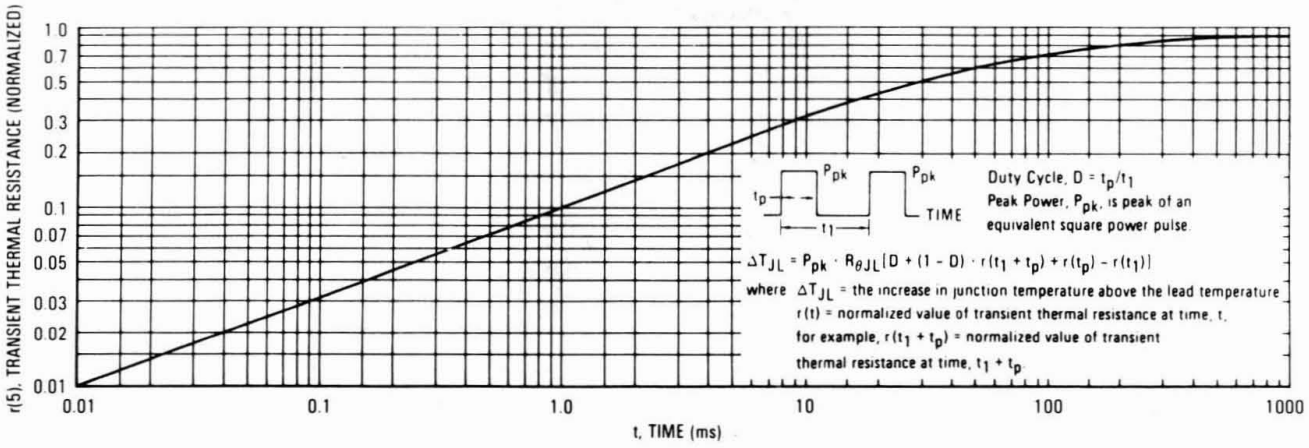

HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 10.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficieny is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

3

FIGURE 10 — CAPACITANCE

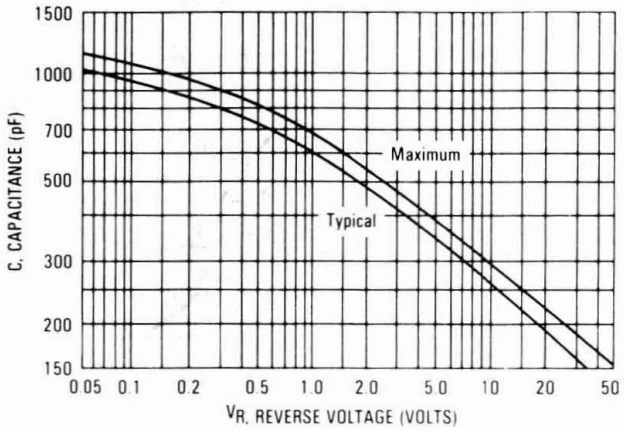

FIGURE 11 — TEST CIRCUIT FOR dv/dt AND REVERSE SURGE CURRENT

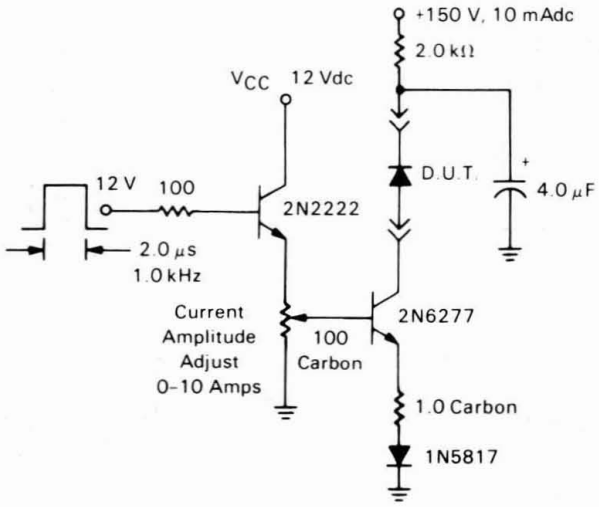

Switchmode Power Rectifiers

MBR2060CT
MBR2070CT
MBR2080CT
MBR2090CT
MBR20100CT

MBR2060CT and MBR20100CT are Motorola Preferred Devices

SCHOTTKY BARRIER RECTIFIERS 20 AMPERES 60–100 VOLTS

3

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- 20 Amps Total (10 Amps Per Diode Leg)
- Guard-Ring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche
- Epoxy Meets UL94, VO at 1/8″
- Low Power Loss/High Efficiency
- High Surge Capacity
- Low Stored Charge Majority Carrier Conduction



Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B2060, B2070, B2080, B2090, B20100



CASE 221A-06
TO-220AB
PLASTIC

MAXIMUM RATINGS PER DIODE LEG

Rating	Symbol	MBR					Unit
		2060CT	2070CT	2080CT	2090CT	20100CT	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	60	70	80	90	100	Volts
Average Rectified Forward Current (Rated V_R) T_C = 133°C	$I_{F(AV)}$	10					Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 133°C	I_{FRM}	20					Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150					Amps
Peak Repetitive Reverse Surge Current (2 μs, 1 kHz)	I_{RRM}	0.5					Amp
Operating Junction Temperature	T_J	−65 to +150					°C
Storage Temperature	T_{stg}	−65 to +175					°C
Voltage Rate of Change (Rated V_R)	dv/dt	10,000					V/μs

THERMAL CHARACTERISTICS

Maximum Thermal Resistance — Junction to Case — Junction to Ambient	$R_{\theta JC}$ $R_{\theta JA}$	2 60	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE LEG

Maximum Instantaneous Forward Voltage (1) (i_F = 10 Amp, T_C = 125°C) (i_F = 10 Amp, T_C = 25°C) (i_F = 20 Amp, T_C = 125°C) (i_F = 20 Amp, T_C = 25°C)	v_F	 0.75 0.85 0.85 0.95	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 6 0.1	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Rev 2

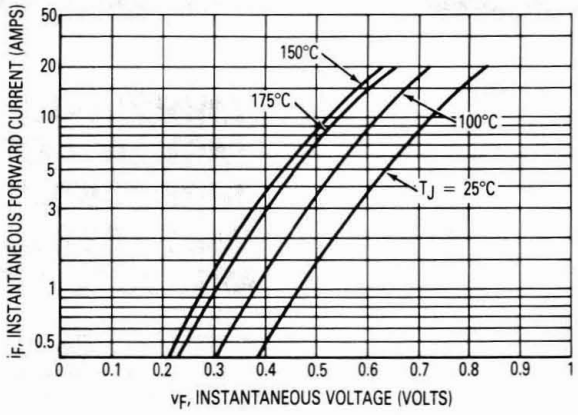

Figure 1. Typical Forward Voltage Per Diode

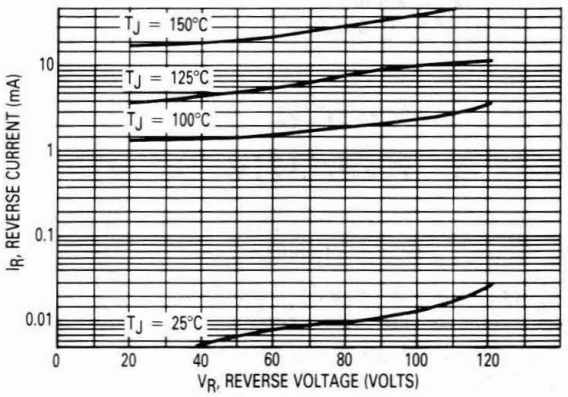

Figure 2. Typical Reverse Current Per Diode

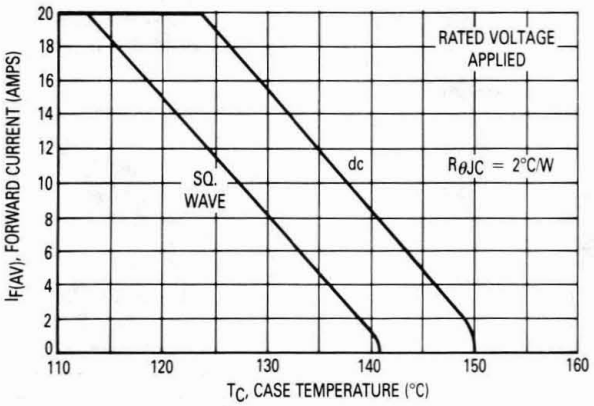

Figure 3. Current Derating, Case

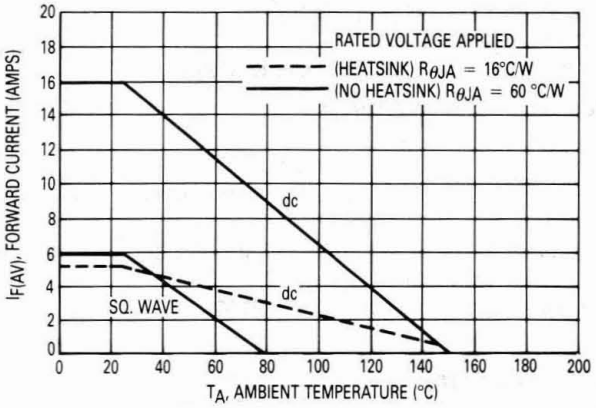

Figure 4. Current Derating, Ambient

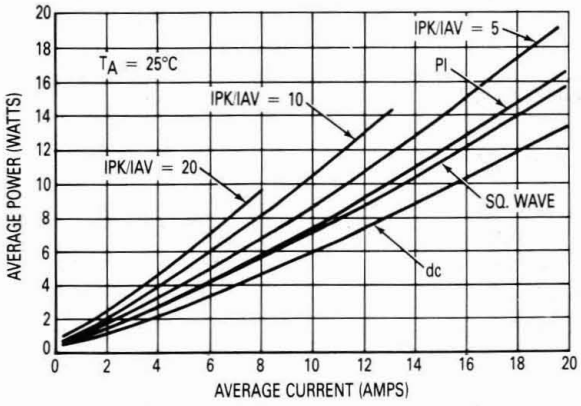

Figure 5. Average Power Dissipation and Average Current

Switchmode™ Power
Dual Schottky Rectifier

MBR20200CT

. . . using Schottky Barrier technology with a platinum barrier metal. This state–of–the–art device is designed for use in high frequency switching power supplies and converters with up to 48 volt outputs. They block up to 200 volts and offer improved Schottky performance at frequencies from 250 kHz to 5.0 MHz.

- **200 Volt Blocking Voltage**
- Low Forward Voltage Drop
- Guardring for Stress Protection and High dv/dt Capability (10,000 V/μs)
- Dual Diode Construction — Terminals 1 and 3 Must be Connected for Parallel Operation at Full Rating

SCHOTTKY BARRIER RECTIFIER 20 AMPERES 200 VOLTS



CASE 221A–06 (TO–220)

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B20200

MAXIMUM RATINGS (PER LEG)

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Current (Rated V_R) T_C = 125°C — Per Leg Per Package	$I_{F(AV)}$	10 20	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz) T_C = 90°C	I_{FRM}	20	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	Amp
Operating Junction Temperature	T_J	–65 to +150	°C
Storage Temperature	T_{stg}	–65 to +175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10,000	V/μs

THERMAL CHARACTERISTICS (PER LEG)

Thermal Resistance — Junction to Case	$R_{\theta JC}$	2.0	°C/W

ELECTRICAL CHARACTERISTICS (PER LEG)

Maximum Instantaneous Forward Voltage (1)	(I_F = 10 Amps, T_C = 25°C) (I_F = 10 Amps, T_C = 125°C) (I_F = 20 Amps, T_C = 25°C) (I_F = 20 Amps, T_C = 125°C)	V_F	0.9 0.8 1.0 0.9	Volts
Maximum Instantaneous Reverse Current (1)	(Rated dc Voltage, T_C = 25°C) (Rated dc Voltage, T_C = 125°C)	I_R	1.0 50	mA

DYNAMIC CHARACTERISTICS (PER LEG)

Capacitance (V_R = –5.0 V, T_C = 25°C, Frequency = 1.0 MHz)	C_T	500	pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.

Rev 1

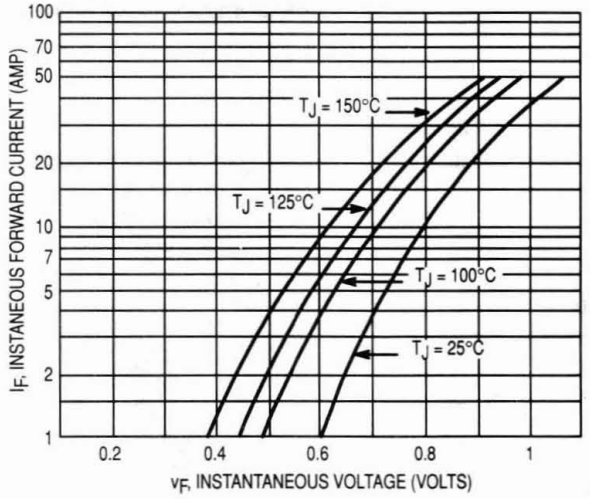

Figure 1. Typical Forward Voltage (Per Leg)

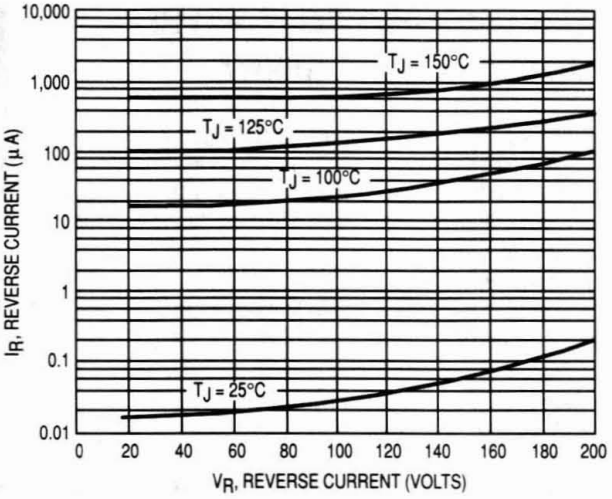

Figure 2. Typical Reverse Current (Per Leg)

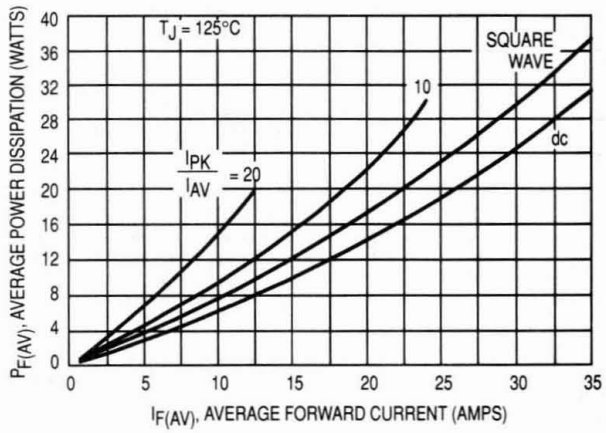

Figure 3. Forward Power Dissipation

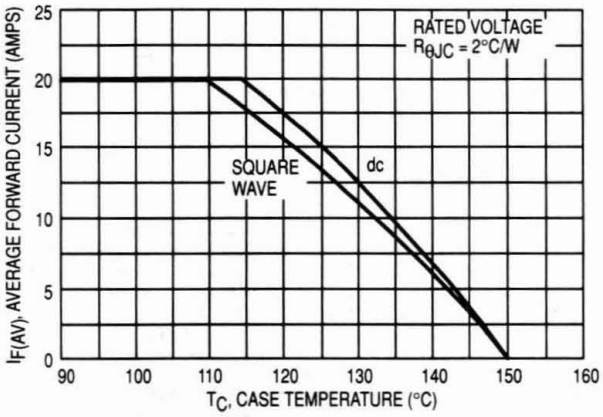

Figure 4. Current Derating, Case

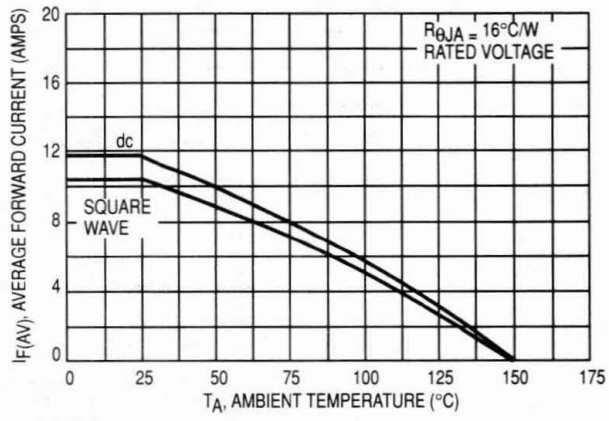

Figure 5. Current Derating, Ambient

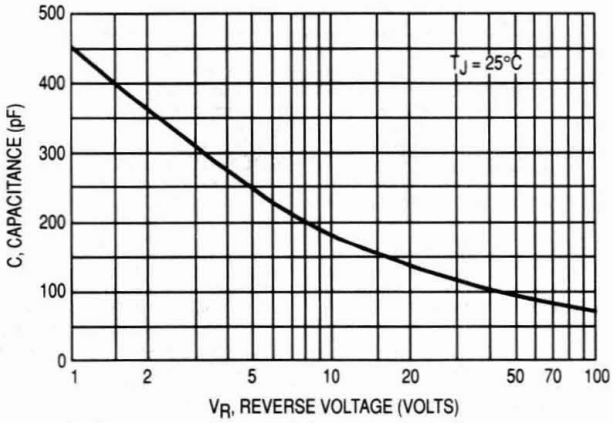

Figure 6. Typical Capacitance (Per Leg)

Advance Information

SWITCHMODE™ Power Rectifiers

MBR2515L

SCHOTTKY BARRIER RECTIFIER 25 AMPERES 15 VOLTS

. . . employing the Schottky Barrier principle in a large metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use in low voltage, high frequency switching power supplies, low voltage converters, OR'ing diodes, and polarity protection devices.

- Very Low Forward Voltage (0.28 V Maximum @ 19 Amps, 70°C)
- Guardring for Stress Protection
- Highly Stable Oxide Passivated Junction (100°C Operating Junction Temperature)
- Epoxy Meets UL94, VO at 1/8″



CASE 221B–03, STYLE 1 (TO–220AC)

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 Units Per Plastic Tube
- Marking: B2515L

MAXIMUM RATINGS (Per Leg)

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	15	Volts
Average Rectified Forward Current (Rated V_R) T_C = 90°C	$I_{F(AV)}$	25	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz) T_C = 90°C	I_{FRM}	30	Amps
Non Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	Amps
Operating Junction Temperature	T_J	−65 to +100	°C
Storage Temperature	T_{stg}	−65 to +125	°C

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case	$R_{\theta JC}$	2.0	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (I_F = 25 Amps, T_J = 25°C) (I_F = 25 Amps, T_J = 70°C) (I_F = 19 Amps, T_J = 70°C)	V_F	 0.45 0.42 0.28	Volts
Maximum Instantaneous Reverse Current (1) (Rated DC Voltage, T_J = 25°C) (Rated DC Voltage, T_J = 70°C)	I_R	 15 200	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Switchmode™ Power Rectifier

MBR2535CTL

SCHOTTKY BARRIER RECTIFIER 25 AMPERES 35 VOLTS

. . . employing the Schottky Barrier principle in a large metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use in low voltage, high frequency switching power supplies, free wheeling diodes, and polarity protection diodes.

- Very Low Forward Voltage (0.55 V Maximum @ 25 Amps)
- Matched Dual Die Construction (12.5 A per Leg or 25 A per Package)
- Guardring for Stress Protection
- Highly Stable Oxide Passivated Junction (125°C Operating Junction Temperature)
- Epoxy Meets UL94, VO at 1/8″



Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B2535L

CASE 221A–06 (TO–220AC)

MAXIMUM RATINGS (PER LEG)

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35 35 35	Volts
Average Rectified Forward Current (Rated V_R) T_C = 110°C	$I_{F(AV)}$	12.5	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz) T_C = 95°C	I_{FRM}	25	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	Amp
Operating Junction Temperature	T_J	–65 to +125	°C
Storage Temperature	T_{stg}	–65 to +150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10,000	V/μs
Controlled Avalanche Energy	W_{aval}	20	mJ

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case	$R_{\theta JC}$	2.0	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (I_F = 25 Amps, T_J = 25°C) (I_F = 12.5 Amps, T_J = 25°C) (I_F = 12.5 Amps, T_J = 125°C)	V_F	 0.55 0.47 0.41	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 25°C) (Rated dc Voltage, T_J = 125°C)	I_R	 5.0 500	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.

Rev 1

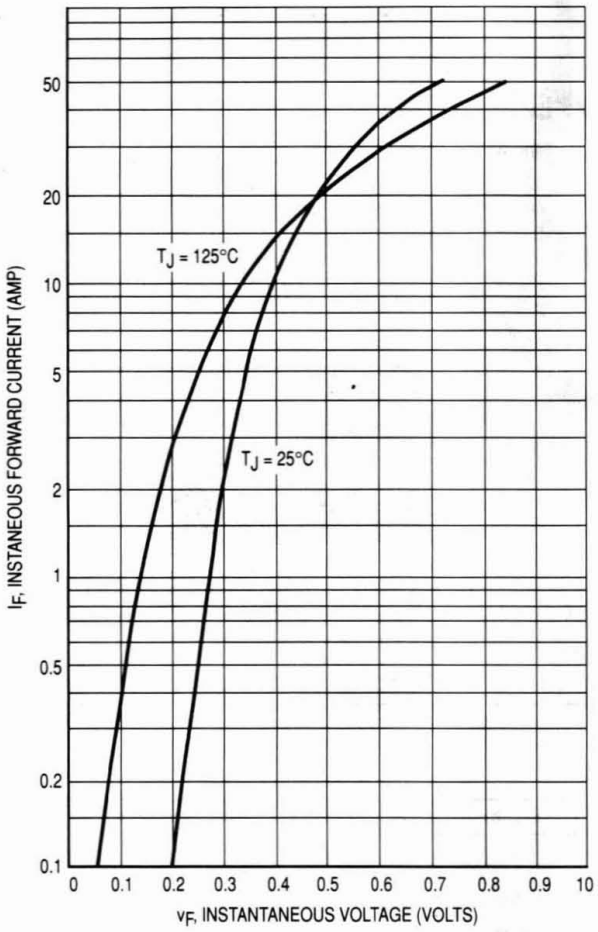

Figure 1. Typical Forward Voltage, Per Leg

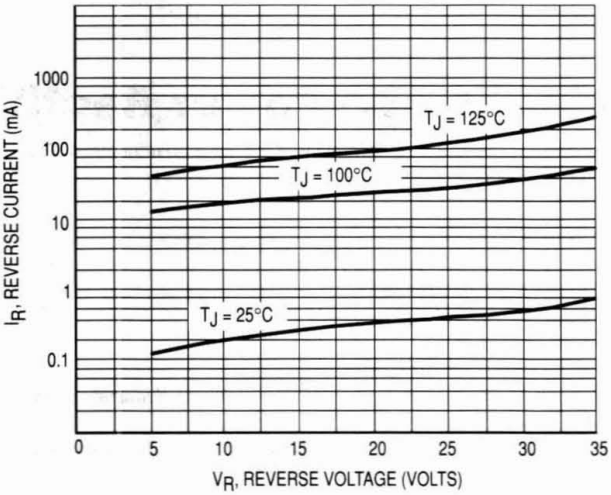

Figure 2. Typical Reverse Current, Per Leg

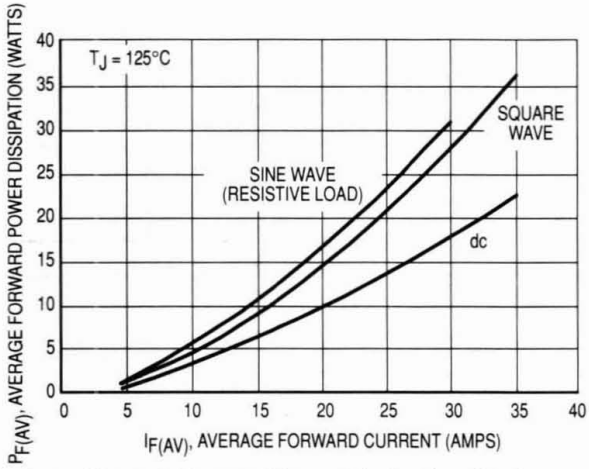

Figure 3. Forward Power Dissipation, Per Leg

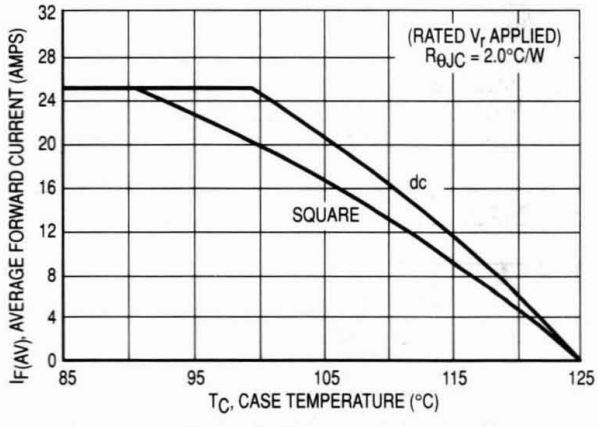

Figure 4. Current Derating

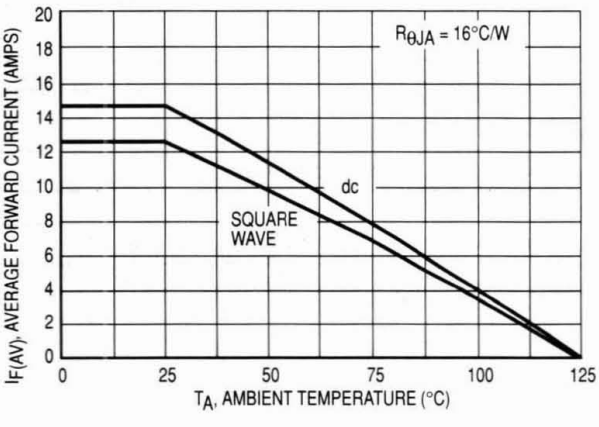

Figure 5. Current Derating Ambient, Per Leg

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MBR2535CT
MBR2545CT

MBR2545CT is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B2535, B2545

SCHOTTKY BARRIER RECTIFIERS

30 AMPERES
35 and 45 VOLTS

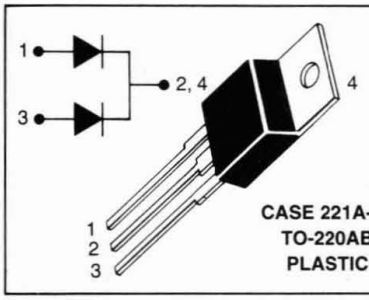

CASE 221A-06
TO-220AB
PLASTIC

MAXIMUM RATINGS

Rating	Symbol	MBR2535CT	MBR2545CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 130°C	$I_{F(AV)}$	30	30	Amps
Peak Repetitive Forward Current Per Diode Leg (Rated V_R, Square Wave, 20 kHz) T_C = 130°C	I_{FRM}	30	30	Amps
Nonrepetitive Peak Surge Current per Diode Leg (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	1.0	Amps
Operating Junction Temperature	T_J	-65 to + 150	-65 to + 150	°C
Storage Temperature	T_{stg}	-65 to +175	-65 to +175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	10000	V/μs
THERMAL CHARACTERISTICS PER DIODE LEG				
Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.5	1.5	°C/W
ELECTRICAL CHARACTERISTICS PER DIODE LEG				
Maximum Instantaneous Forward Voltage (1) (i_F = 30 Amp, T_C = 125°C) (i_F = 30 Amp, T_C = 25°C)	v_F	 0.73 0.82	 0.73 0.82	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 40 0.2	 40 0.2	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 1

FIGURE 1 — TYPICAL FORWARD VOLTAGE

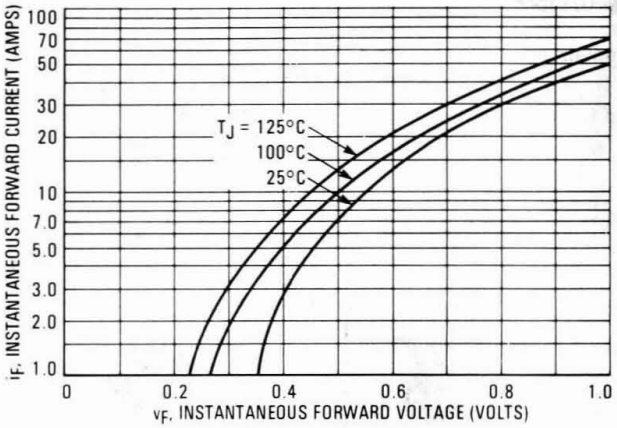

FIGURE 2 — TYPICAL REVERSE CURRENT

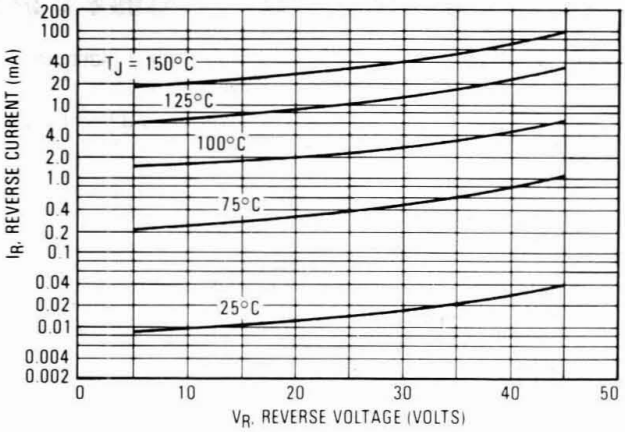

3

FIGURE 3 — CURRENT DERATING, CASE

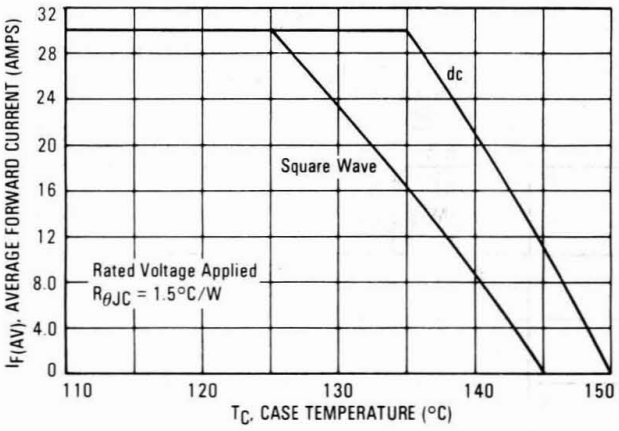

FIGURE 4 — CURRENT DERATING, AMBIENT

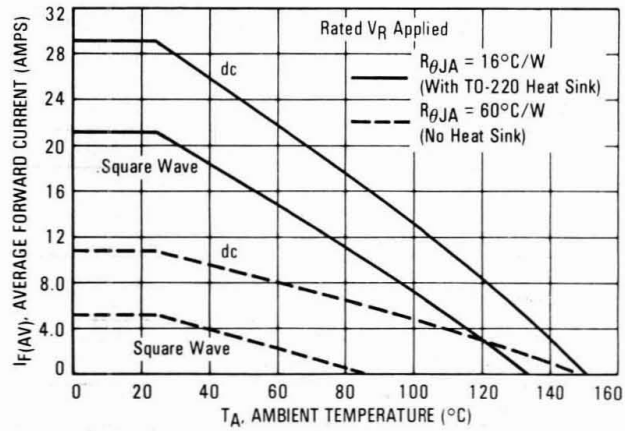

FIGURE 5 — FORWARD POWER DISSIPATION

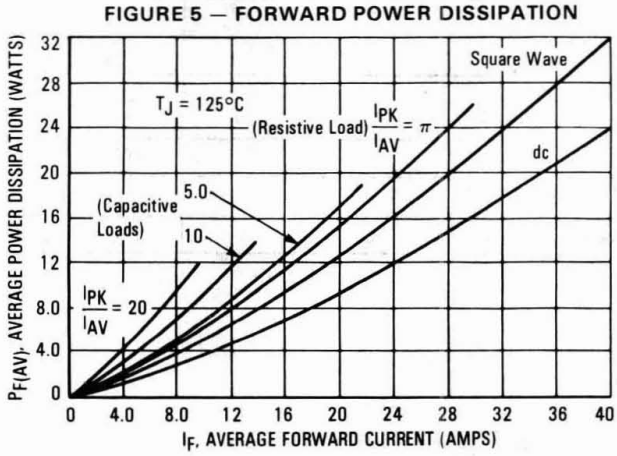

Advance Information

SWITCHMODE™ Power Rectifier

MBR3045ST
Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 30 AMPERES 45 VOLTS

. . . using the Schottky Barrier principle with a platinum barrier metal. This state–of–the–art device has the following features:

- Dual Diode Construction — Terminals 1 and 3 May Be Connected for Parallel Operation at Full Rating
- 45 V Blocking Voltage
- Low Forward Voltage Drop
- Guardring for Stress Protection
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche



CASE 221A–06, STYLE 6 (TO–220AB)

3

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 Units Per Plastic Tube
- Marking: B3045

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	V
Average Rectified Current Per Device T_C = 130°C Per Diode	$I_{F(AV)}$	30 15	A
Peak Repetitive Forward Current, Per Diode (Square Wave, V_R = 45 V, 20 kHz)	I_{FRM}	30	A
Non Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	A
Peak Repetitive Reverse Current, Per Diode (2.0 µs, 1.0 kHz)	I_{RRM}	2.0	A
Operating Junction Temperature	T_J	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +175	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175	°C
Voltage Rate of Change (Rated V_R)	dV/dt	10000	V/µs

THERMAL CHARACTERISTICS PER DIODE

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.5	°C/W

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS PER DIODE

Rating	Symbol	Max	Unit
Instantaneous Forward Voltage (1) (I_F = 30 Amp, T_C = 25°C) (I_F = 30 Amp, T_C = 125°C) (I_F = 20 Amp, T_C = 125°C)	V_F	 0.76 0.72 0.60	V
Instantaneous Reverse Current (1) (V_R = 45 Volts, T_C = 25°C) (V_R = 45 Volts, T_C = 125°C)	I_R	 0.2 40	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

MBR735
MBR745

Switchmode Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche
- Epoxy Meets UL94, VO at 1/8″

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B735, B745

MBR745 is a Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS

7.5 AMPERES
35 and 45 VOLTS



CASE 221B-03
TO-220AC

MAXIMUM RATINGS

Rating	Symbol	MBR735	MBR745	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 105°C	$I_{F(AV)}$	7.5	7.5	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 105°C	I_{FRM}	15	15	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	1.0	Amps
Operating Junction Temperature	T_J	-65 to +150	-65 to +150	°C
Storage Temperature	T_{stg}	-65 to +175	-65 to +175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	10000	V/μs

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.0	3.0	°C/W
Maximum Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	60	60	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 7.5 Amp, T_C = 125°C) (i_F = 15 Amp, T_C = 125°C) (i_F = 15 Amp, T_C = 25°C)	v_F	 0.57 0.72 0.84	 0.57 0.72 0.84	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 15 0.1	 15 0.1	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 1

FIGURE 1 — TYPICAL FORWARD VOLTAGE

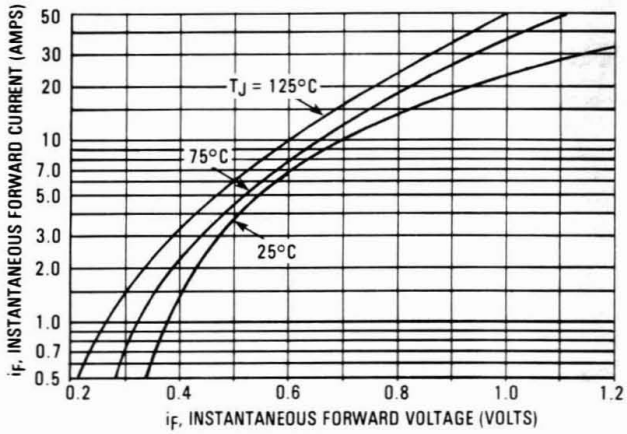

FIGURE 2 — TYPICAL REVERSE CURRENT

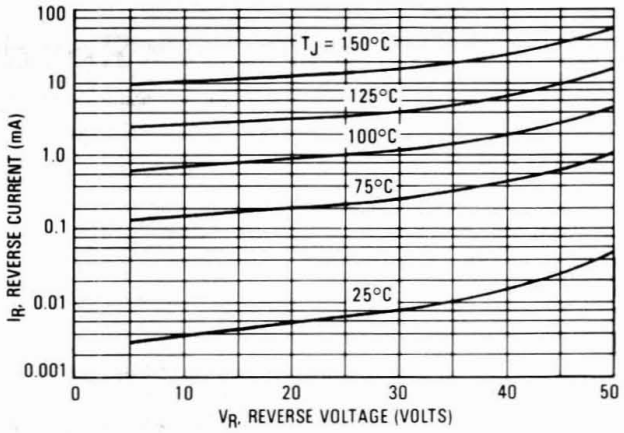

FIGURE 3 — CURRENT DERATING, CASE

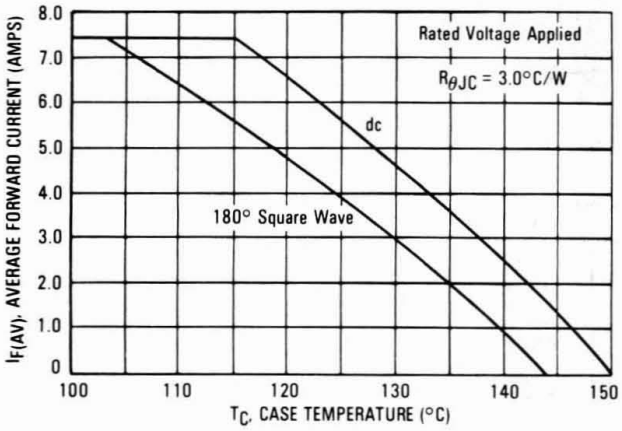

FIGURE 4 — CURRENT DERATING, AMBIENT

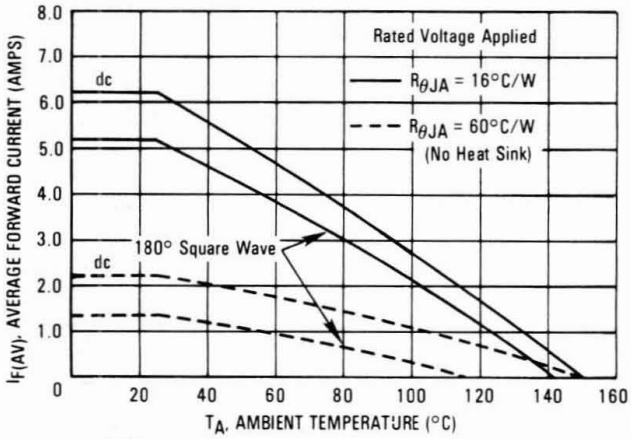

FIGURE 5 — POWER DISSIPATION

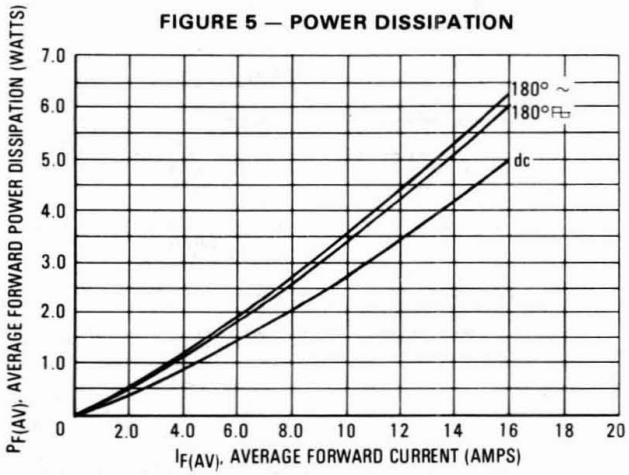

MBR1035
MBR1045

MBR1045 is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche
- Epoxy Meets UL94, VO at 1/8″

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B1035, B1045

SCHOTTKY BARRIER RECTIFIERS

10 AMPERES
20 to 45 VOLTS



CASE 221B-03
TO-220AC
PLASTIC

MAXIMUM RATINGS

Rating	Symbol	MBR1035	MBR1045	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 135°C	$I_{F(AV)}$	10	10	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 135°C	I_{FRM}	20	20	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz) See Figure 12	I_{RRM}	1.0	1.0	Amps
Operating Junction Temperature	T_J	-65 to + 150	-65 to + 150	°C
Storage Temperature	T_{stg}	-65 to +175	-65 to +175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	10000	V/μs

THERMAL CHARACTERISTICS

Characteristic	Symbol	MBR1035	MBR1045	Unit
Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.0	2.0	°C/W

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	MBR1035	MBR1045	Unit
Maximum Instantaneous Forward Voltage (1) (i_F = 10 A, T_C = 125°C) (i_F = 20 A, T_C = 125°C) (i_F = 20 A, T_C = 25°C)	v_F	 0.57 0.72 0.84	 0.57 0.72 0.84	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 15 0.1	 15 0.1	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 2

FIGURE 1 —MAXIMUM FORWARD VOLTAGE

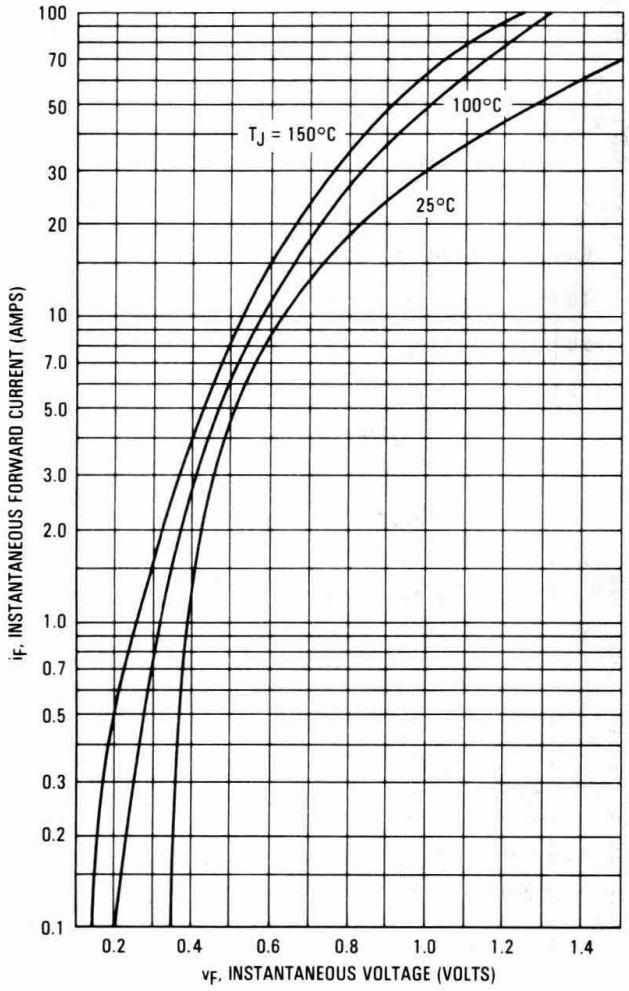

FIGURE 2 —TYPICAL FORWARD VOLTAGE

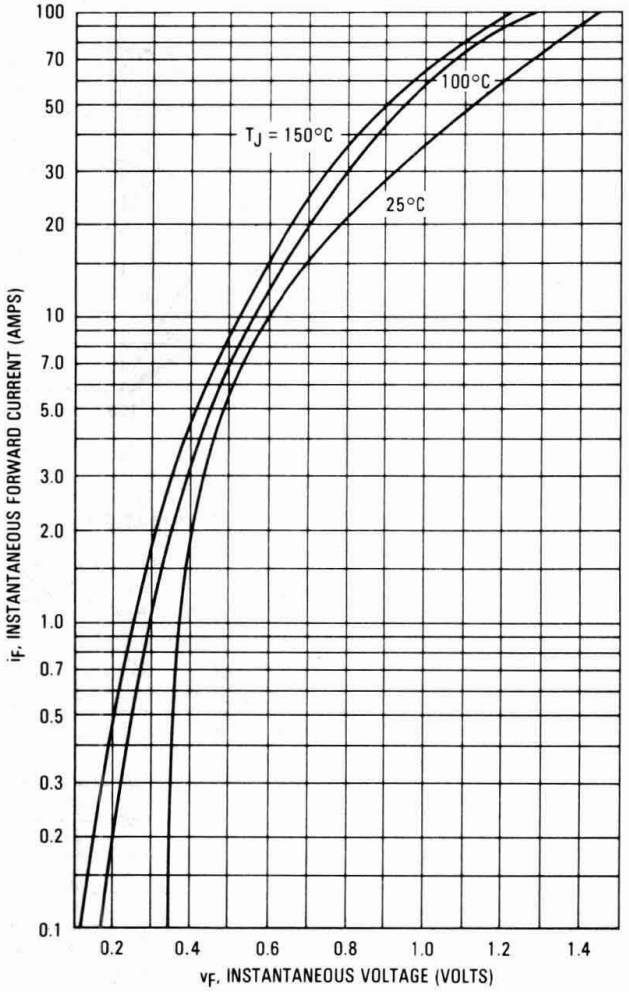

FIGURE 3 — MAXIMUM REVERSE CURRENT

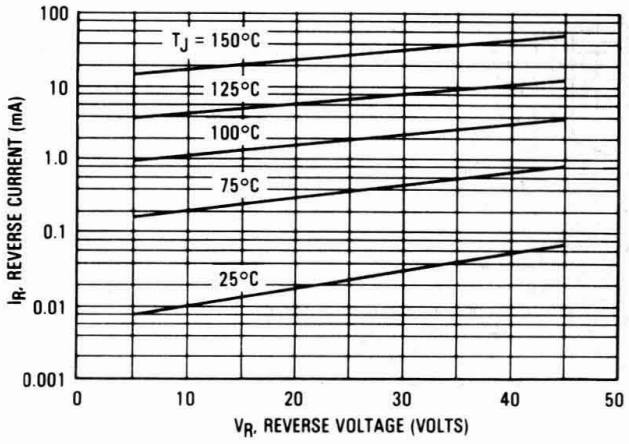

FIGURE 4 — MAXIMUM SURGE CAPABILITY

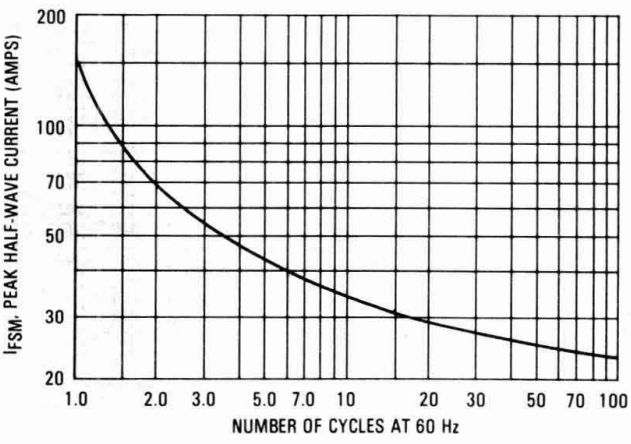

3

FIGURE 5 — CURRENT DERATING, INFINITE HEATSINK

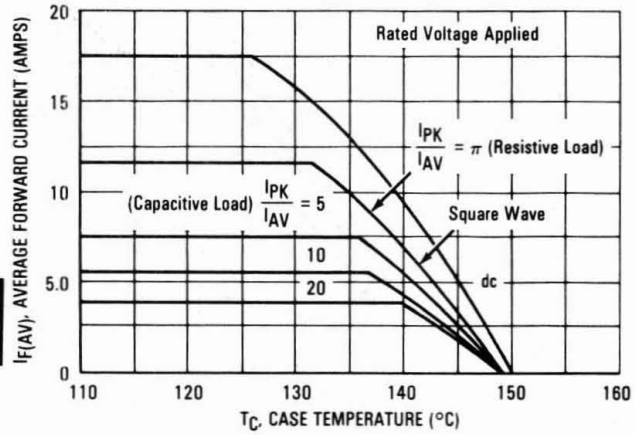

FIGURE 6 — CURRENT DERATING, $R_{\theta JA}$ = 16° C/W

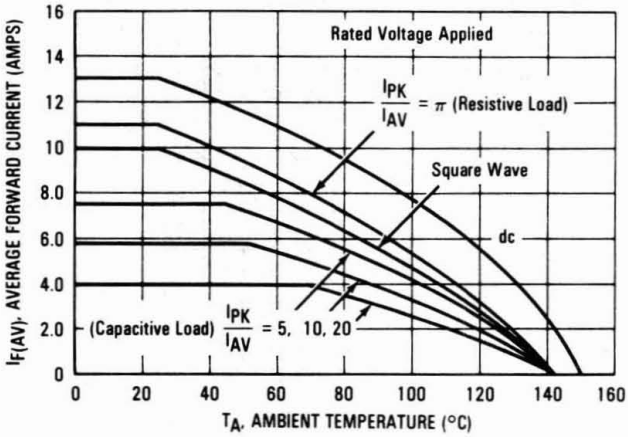

FIGURE 7 — FORWARD POWER DISSIPATION

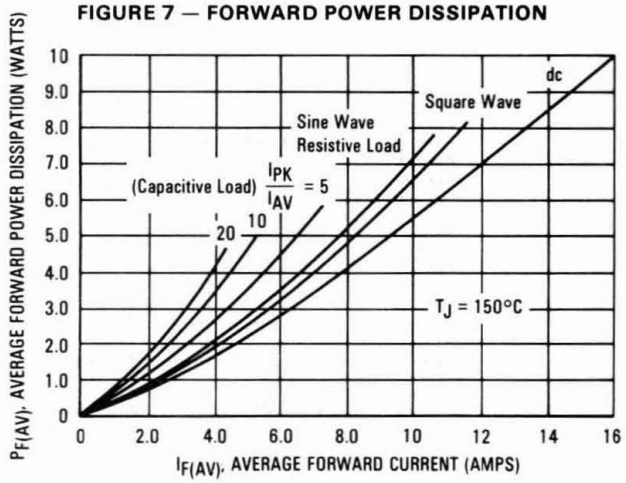

FIGURE 8 — CURRENT DERATING, FREE AIR

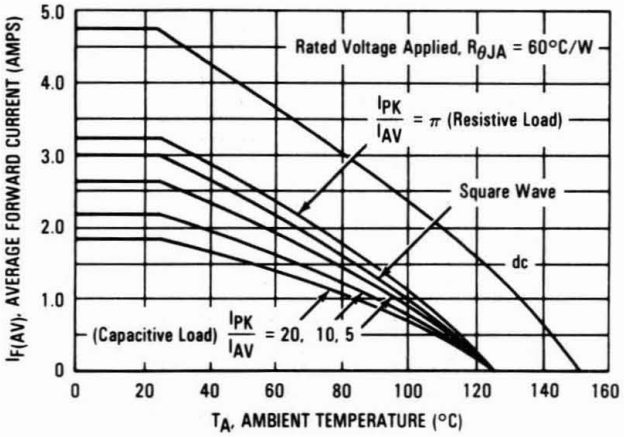

FIGURE 9 — THERMAL RESPONSE

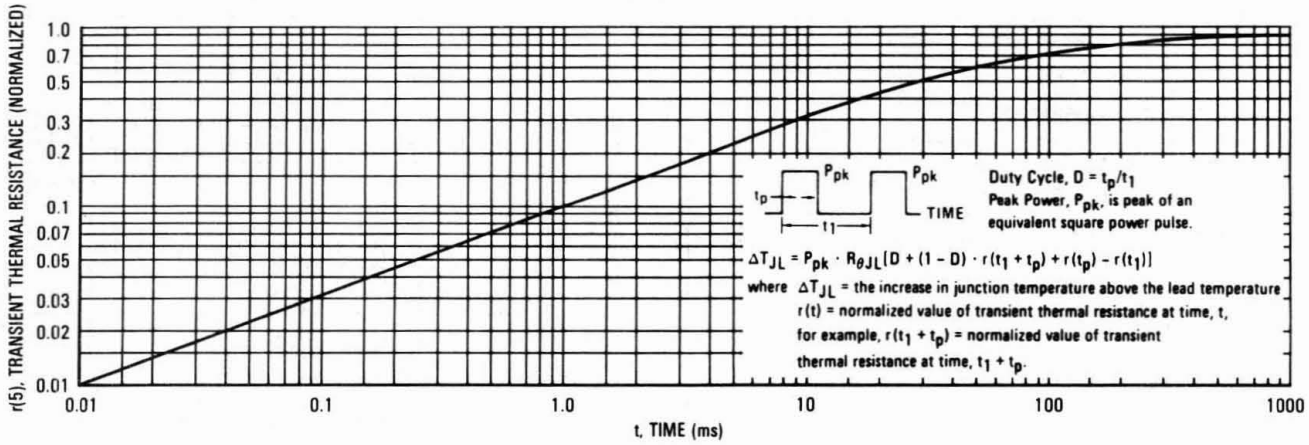

HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 10.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficieny is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

FIGURE 10 — CAPACITANCE

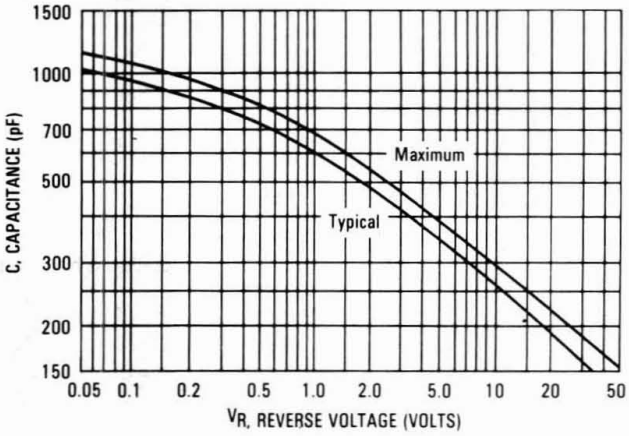

3

FIGURE 11 — SCHOTTKY RECTIFIER

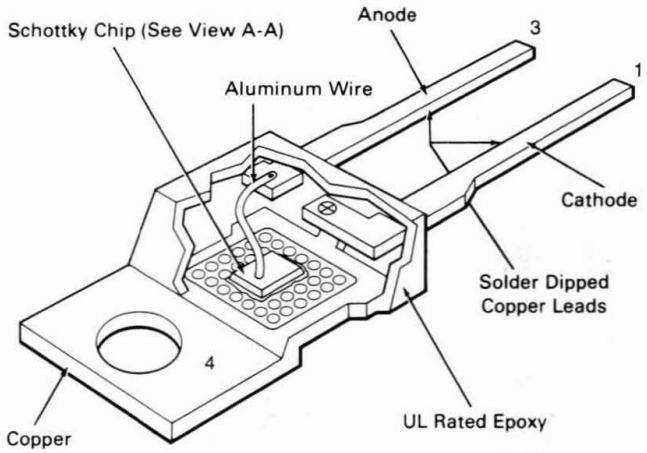

Schottky Chip — View A-A

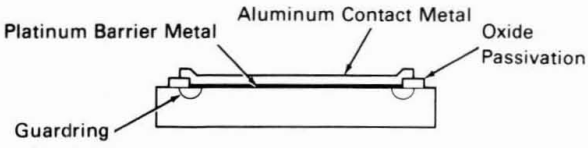

Motorola builds quality and reliability into its Schottky Rectifiers.

First is the chip, which has an interface metal between the barrier metal and aluminum-contact metal to eliminate any possible interaction between the two. The indicated guardring prevents dv/dt problems, so snubbers are not mandatory. The guardring also operates like a zener to absorb over-voltage transients.

Second is the package. The Schottky chip is bonded to the copper heat sink using a specially formulated solder. This gives the unit the capability of passing 10,000 operating thermal-fatigue cycles having a ΔT_J of 100°C. The epoxy molding compound is rated per UL 94, V0 @ 1/8". Wire bonds are 100% tested in assembly as they are made.

Third is the electrical testing, which includes 100% dv/dt at 1600 V/μs and reverse avalanche as part of device characterization.

FIGURE 12 — TEST CIRCUIT FOR dv/dt AND REVERSE SURGE CURRENT

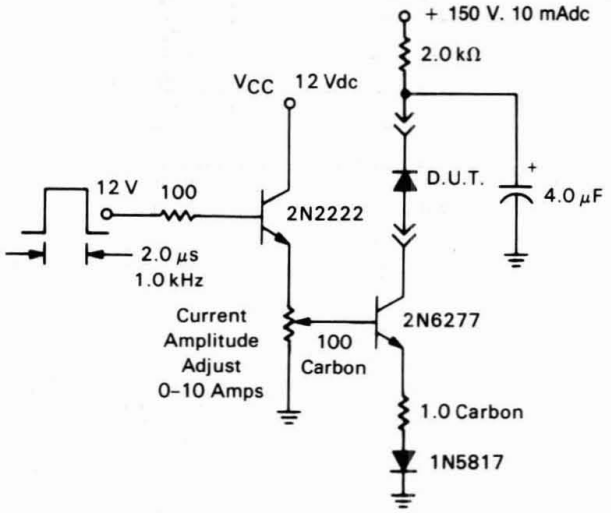

Switchmode Power Rectifiers

MBR1060
MBR1070
MBR1080
MBR1090
MBR10100

MBR1060 and MBR10100 are Motorola Preferred Devices

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Guard-Ring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche
- Epoxy Meets UL94, VO at 1/8″
- Low Power Loss/High Efficiency
- High Surge Capacity
- Low Stored Charge Majority Carrier Conduction

SCHOTTKY BARRIER RECTIFIERS 10 AMPERES 60–100 VOLTS



CASE 221B–03
TO–220AC

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B1060, B1070, B1080, B1090, B10100

MAXIMUM RATINGS

Rating	Symbol	MBR					Unit
		1060	1070	1080	1090	10100	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	60	70	80	90	100	Volts
Average Rectified Forward Current (Rated V_R) T_C = 133°C	$I_{F(AV)}$	10					Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 133°C	I_{FRM}	20					Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150					Amps
Peak Repetitive Reverse Surge Current (2 μs, 1 kHz)	I_{RRM}	0.5					Amp
Operating Junction Temperature	T_J	−65 to +150					°C
Storage Temperature	T_{stg}	−65 to +175					°C
Voltage Rate of Change (Rated V_R)	dv/dt	10,000					V/μs

THERMAL CHARACTERISTICS

Maximum Thermal Resistance — Junction to Case — Junction to Ambient	$R_{\theta JC}$ $R_{\theta JA}$	2 60	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 10 Amp, T_C = 125°C) (i_F = 10 Amp, T_C = 25°C) (i_F = 20 Amp, T_C = 125°C) (i_F = 20 Amp, T_C = 25°C)	v_F	 0.7 0.8 0.85 0.95	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 6.0 0.10	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Rev 2

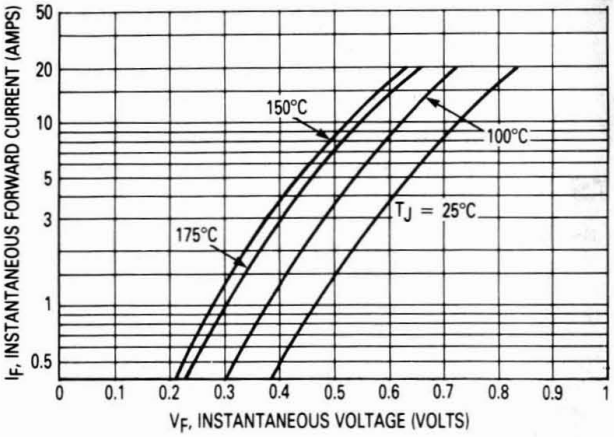

Figure 1. Typical Forward Voltage

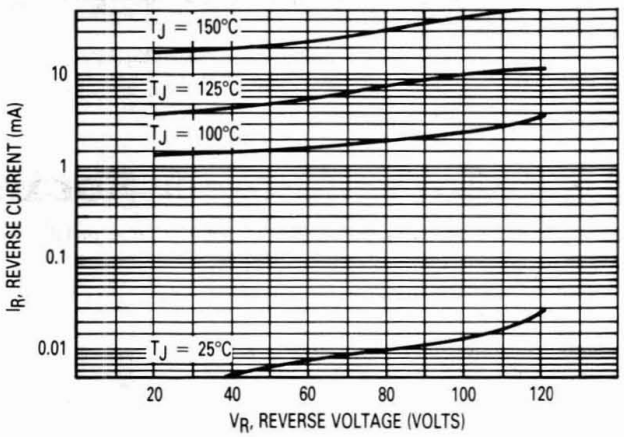

Figure 2. Typical Reverse Current

3

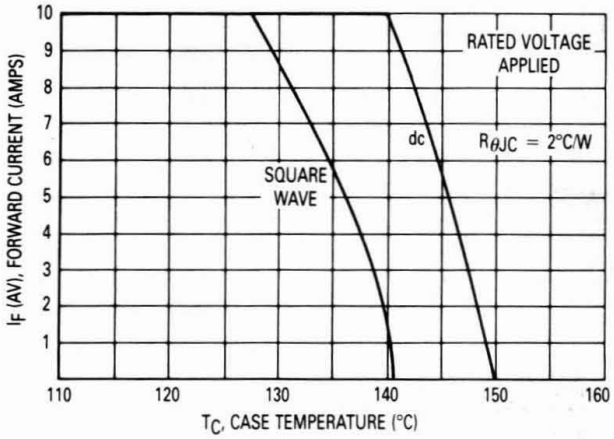

Figure 3. Current Derating, Case

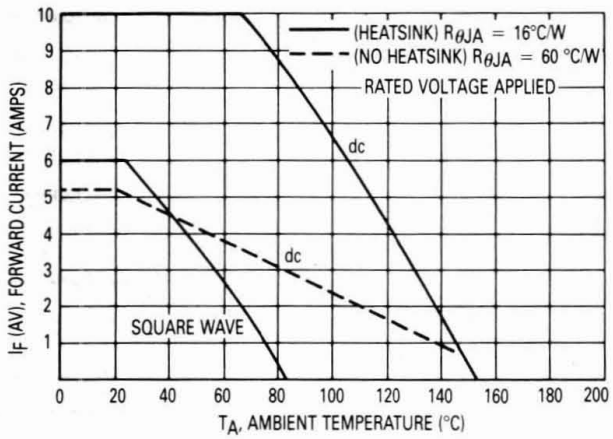

Figure 4. Current Derating, Ambient

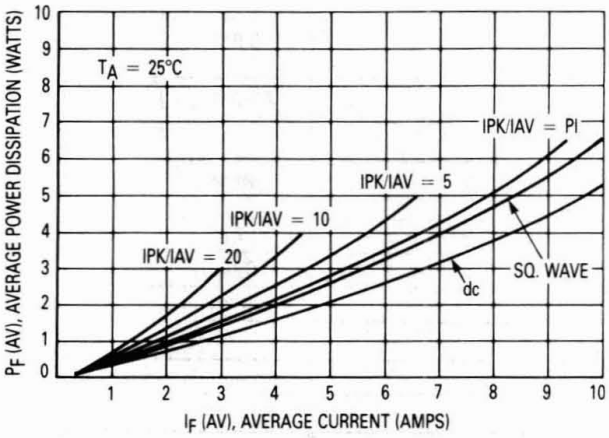

Figure 5. Forward Power Dissipation

MBR1635
MBR1645

MBR1645 is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B1635, B1645

SCHOTTKY BARRIER RECTIFIERS

16 AMPERES
35 and 45 VOLTS



CASE 221B-03
TO-220AC

MAXIMUM RATINGS

Rating	Symbol	MBR1635	MBR1645	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 125°C	$I_{F(AV)}$	16	16	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 125°C	I_{FRM}	32	32	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	150	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	1.0	1.0	Amps
Operating Junction Temperature	T_J	−65 to +150	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +175	−65 to +175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	10000	V/μs

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.5	1.5	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 16 Amp, T_C = 125°C) (i_F = 16 Amp, T_C = 25°C)	v_F	 0.57 0.63	 0.57 0.63	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 40 0.2	 40 0.2	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 1

FIGURE 1 — TYPICAL FORWARD VOLTAGE

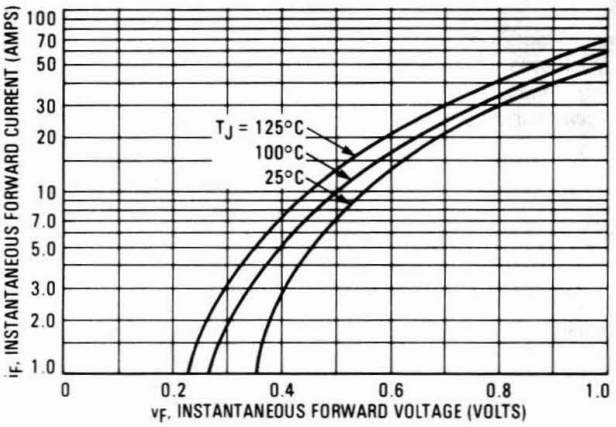

FIGURE 2 — TYPICAL REVERSE CURRENT

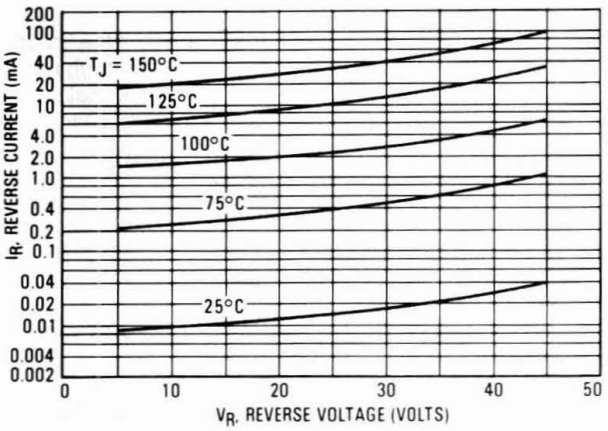

3

FIGURE 3 — CURRENT DERATING, CASE

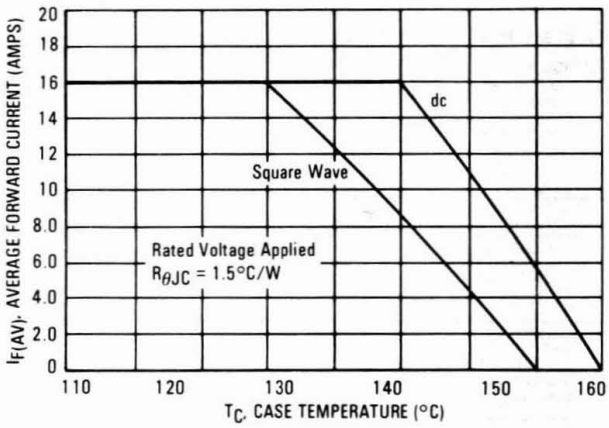

FIGURE 4 — CURRENT DERATING, AMBIENT

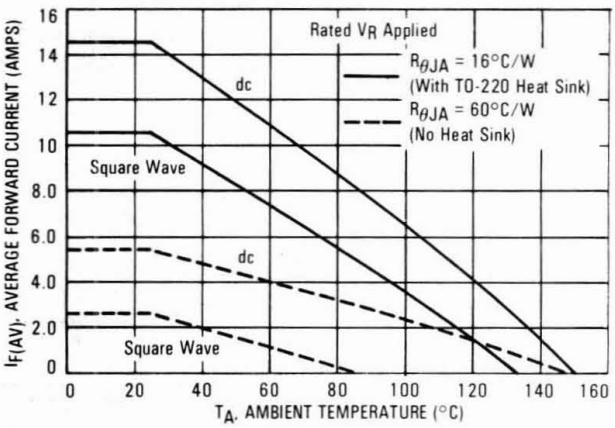

FIGURE 5 — FORWARD POWER DISSIPATION

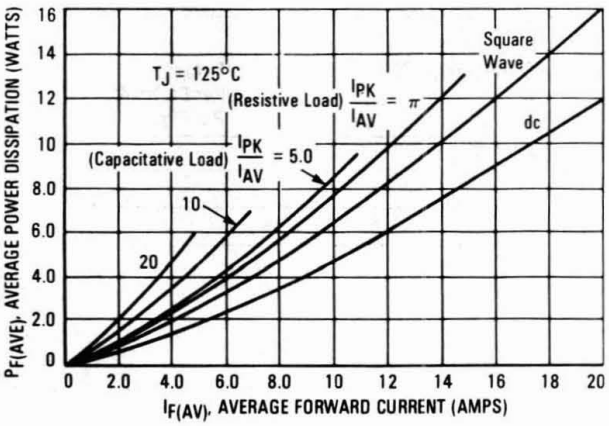

SWITCHMODE™ Schottky Power Rectifiers

MBRF1545CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 15 AMPERES 45 VOLTS



CASE 221D–02
ISOLATED TO–220

The SWITCHMODE Power Rectifier employs the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use as rectifiers in very low–voltage, high–frequency switching power supplies, free wheeling diodes and polarity protection diodes.

- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop
- Matched Dual Die Construction
- High Junction Temperature Capability
- High dv/dt Capability
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection
- Epoxy Meets UL94, VO at 1/8″
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)



Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B1545

MAXIMUM RATINGS, PER LEG

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	45	Volts
Average Rectified Forward Current (Rated V_R), T_C = 105°C	Total Device	$I_{F(AV)}$	7.5 15	Amps
Peak Repetitive Forward Current, T_C = 105°C (Rated V_R, Square Wave, 20 kHz) Per Diode		I_{FRM}	15	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 µs, 1.0 kHz)		I_{RRM}	1.0	Amp
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/µs
RMS Isolation Voltage (t = 1 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 3 Per Figure 4(1) Per Figure 5	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.1	°C/W
Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 seconds	T_L	260	°C

(1) UL Recognized mounting method is per Figure 4.
(2) Proper strike and creepage distance must be provided.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (3) (i_F = 15 Amp, T_C = 25°C) (i_F = 15 Amp, T_C = 125°C) (i_F = 7.5 Amp, T_C = 125°C)	v_F	 0.84 0.72 0.57	Volts
Maximum Instantaneous Reverse Current (3) (Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 125°C)	i_R	 0.1 15	mA

(3) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

3

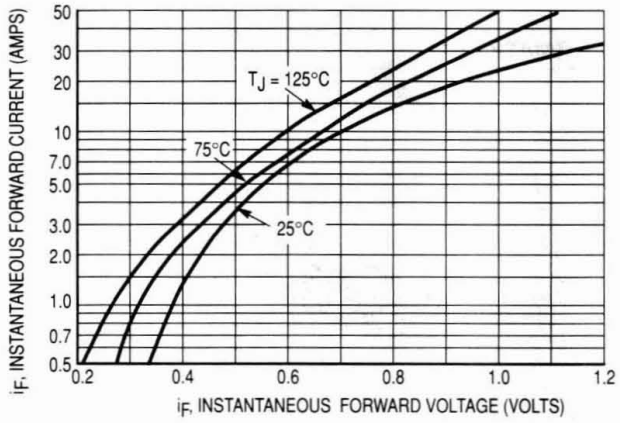

Figure 1. Typical Forward Voltage

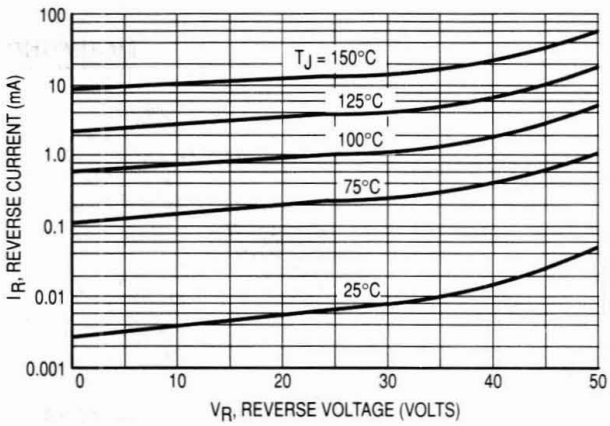

Figure 2. Typical Reverse Current

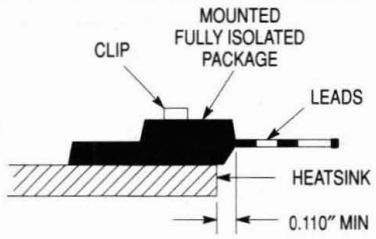

Figure 3. Clip Mounting Position for Isolation Test Number 1

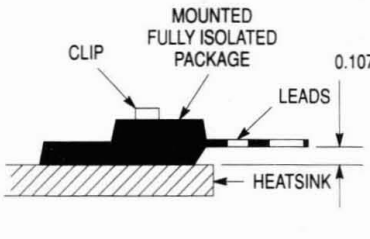

Figure 4. Clip Mounting Position for Isolation Test Number 2

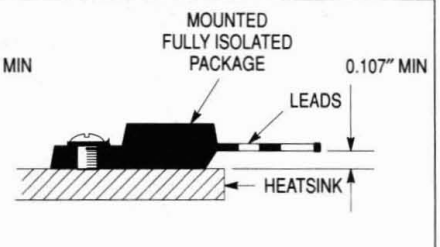

Figure 5. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

3

MOUNTING INFORMATION**

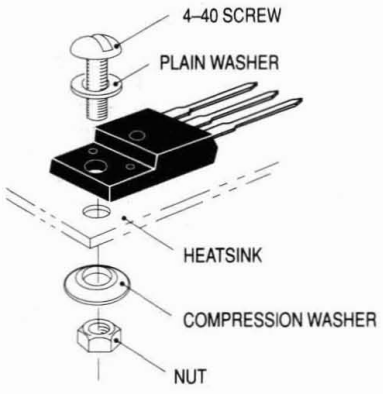

6a. Screw–Mounted

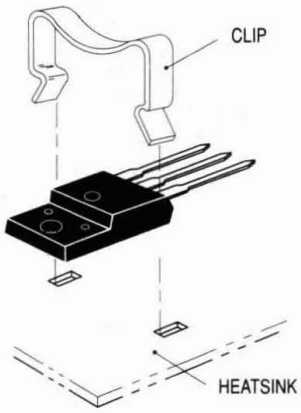

6b. Clip–Mounted

Figure 6. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

SWITCHMODE™ Schottky Power Rectifiers

MBRF2045CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 20 AMPERES 45 VOLTS

3

The SWITCHMODE Power Rectifier employs the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use as rectifiers in very low–voltage, high–frequency switching power supplies, free wheeling diodes and polarity protection diodes.

- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop
- Matched Dual Die Construction
- High Junction Temperature Capability
- High dv/dt Capability
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection
- Epoxy Meets UL94, VO at 1/8″
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)





CASE 221D–02
ISOLATED TO–220

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B2045

MAXIMUM RATINGS, PER LEG

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	45	Volts
Average Rectified Forward Current (Rated V_R), T_C = 135°C	Total Device	$I_{F(AV)}$	10 20	Amps
Peak Repetitive Forward Current Per Diode Leg (Rated V_R, Square Wave, 20 kHz), T_C = 135°C		I_{FRM}	20	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)		I_{RRM}	1.0	Amp
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/μs
RMS Isolation Voltage (t = 1 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 5 Per Figure 6(1) Per Figure 7	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.0	°C/W
Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 seconds	T_L	260	°C

(1) UL recognized mounting method is per Figure 6.
(2) Proper strike and creepage distance must be provided.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (3)	v_F		Volts
(i_F = 20 Amp, T_C = 25°C)		0.84	
(i_F = 20 Amp, T_C = 125°C)		0.72	
(i_F = 10 Amp, T_C = 125°C)		0.57	
Maximum Instantaneous Reverse Current (3)	i_R		mA
(Rated DC Voltage, T_C = 25°C)		0.1	
(Rated DC Voltage, T_C = 125°C)		15	

(3) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.

3

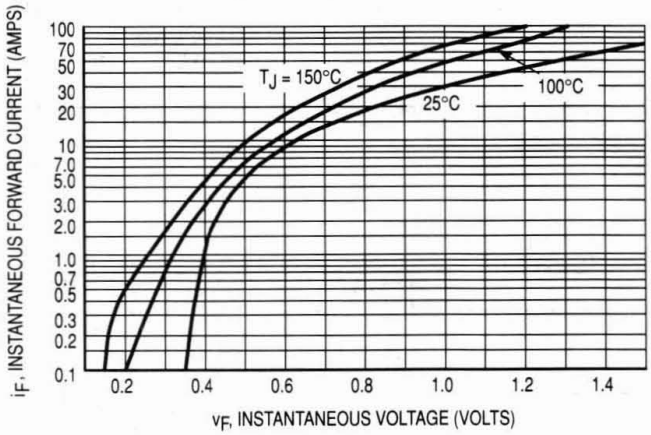

Figure 1. Maximum Forward Voltage

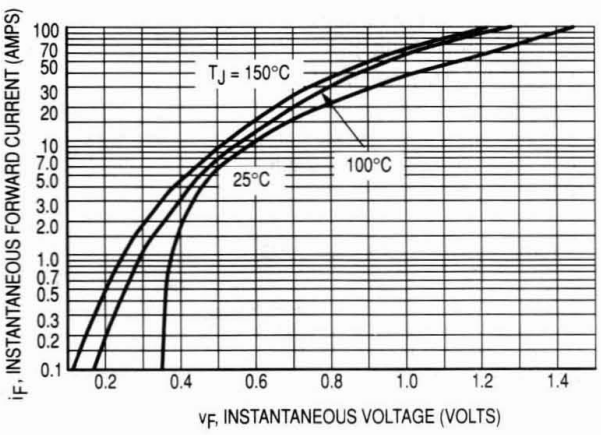

Figure 2. Typical Forward Voltage

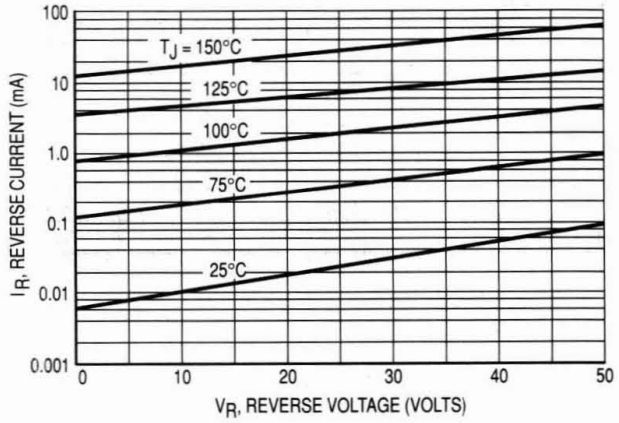

Figure 3. Maximum Reverse Current

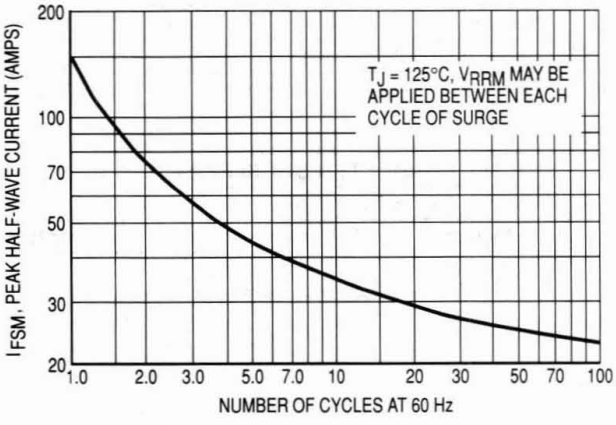

Figure 4. Maximum Surge Capability

TEST CONDITIONS FOR ISOLATION TESTS*

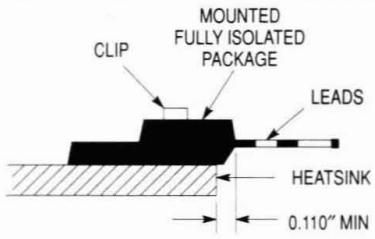

Figure 5. Clip Mounting Position for Isolation Test Number 1

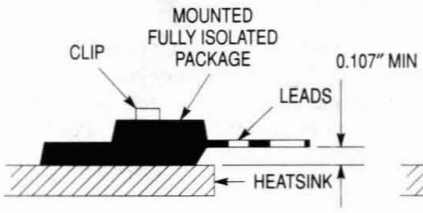

Figure 6. Clip Mounting Position for Isolation Test Number 2

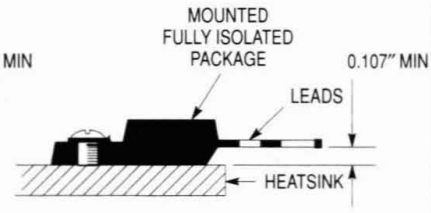

Figure 7. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

MOUNTING INFORMATION**

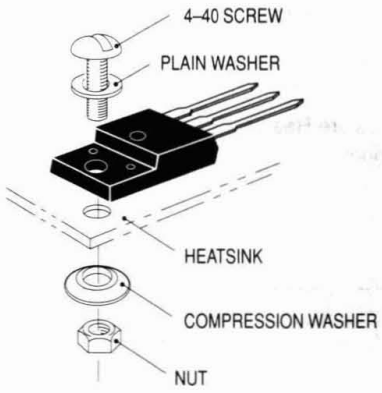

8a. Screw–Mounted

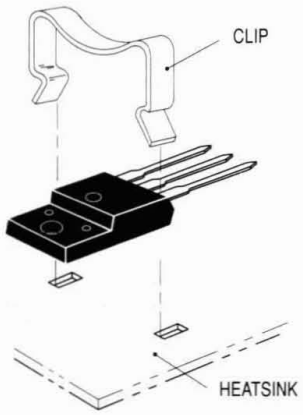

8b. Clip–Mounted

Figure 8. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

SWITCHMODE™ Schottky Power Rectifiers

MBRF2060CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 20 AMPERES 60 VOLTS



CASE 221D–02 ISOLATED TO–220

The SWITCHMODE Power Rectifier employs the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use as rectifiers in very low–voltage, high–frequency switching power supplies, free wheeling diodes and polarity protection diodes.

- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop
- Matched Dual Die Construction
- High Junction Temperature Capability
- High dv/dt Capability
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection
- Epoxy Meets UL94, V_O at 1/8″
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)



Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B2060

MAXIMUM RATINGS, PER LEG

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	60	Volts
Average Rectified Forward Current (Rated V_R), T_C = 133°C	Total Device	$I_{F(AV)}$	10 20	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 133°C		I_{FRM}	20	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)		I_{RRM}	0.5	Amp
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/μs
RMS Isolation Voltage (t = 1.0 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 3 Per Figure 4(1) Per Figure 5	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.0	°C/W
Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 Seconds	T_L	260	°C

(1) UL Recognized mounting method is per Figure 4.
(2) Proper strike and creepage distance must be provided.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (3)	v_F		Volts
(i_F = 10 Amp, T_C = 25°C)		0.85	
(i_F = 10 Amp, T_C = 125°C)		0.75	
(i_F = 20 Amp, T_C = 25°C)		0.95	
(i_F = 20 Amp, T_C = 125°C)		0.85	
Maximum Instantaneous Reverse Current (3)	i_R		mA
(Rated DC Voltage, T_C = 25°C)		0.15	
(Rated DC Voltage, T_C = 125°C)		150	

(3)Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

3

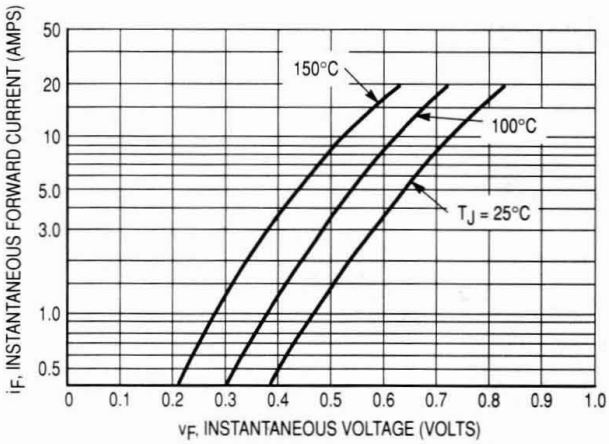

Figure 1. Typical Forward Voltage Per Diode

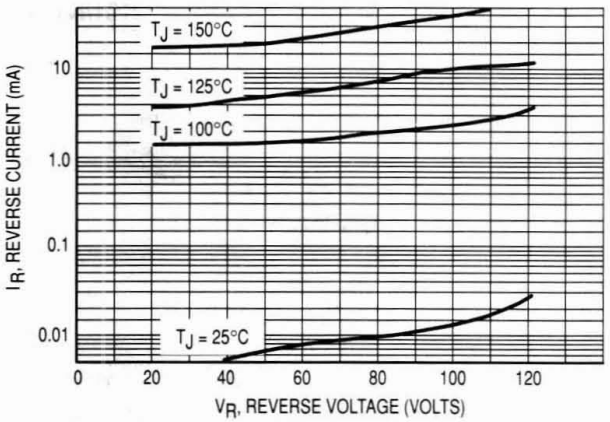

Figure 2. Typical Reverse Current Per Diode

TEST CONDITIONS FOR ISOLATION TESTS*

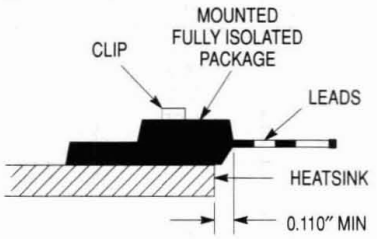

Figure 3. Clip Mounting Position for Isolation Test Number 1

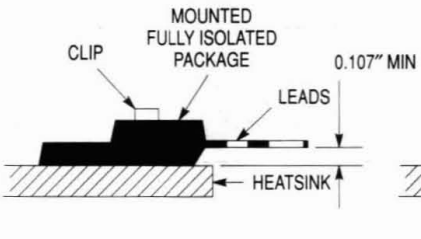

Figure 4. Clip Mounting Position for Isolation Test Number 2

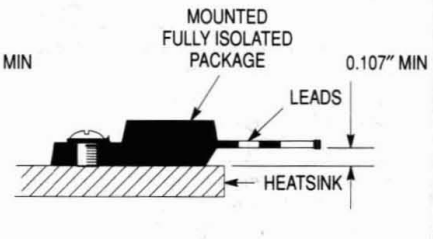

Figure 5. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

MOUNTING INFORMATION**

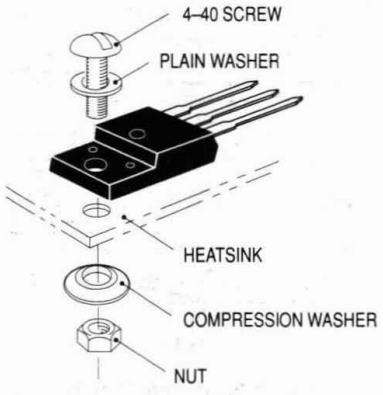

6a. Screw–Mounted

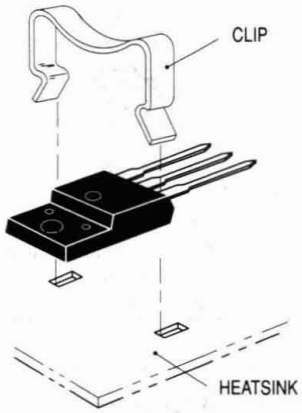

6b. Clip–Mounted

Figure 6. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

SWITCHMODE™ Schottky Power Rectifiers

MBRF20100CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 20 AMPERES 100 VOLTS

The SWITCHMODE Power Rectifier employs the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use as rectifiers in very low–voltage, high–frequency switching power supplies, free wheeling diodes and polarity protection diodes.

- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop
- Matched Dual Die Construction
- High Junction Temperature Capability
- High dv/dt Capability
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection
- Epoxy Meets UL94, V_O at 1/8″
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)





CASE 221D–02 ISOLATED TO–220

3

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B20100

MAXIMUM RATINGS, PER LEG

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	100	Volts
Average Rectified Forward Current (Rated V_R), T_C = 133°C	Total Device	$I_{F(AV)}$	10 20	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 133°C		I_{FRM}	20	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)		I_{RRM}	0.5	Amp
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/μs
RMS Isolation Voltage (t = 1.0 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 3 Per Figure 4(1) Per Figure 5	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance — Junction to Case	$R_{\theta JC}$	3.5	°C/W
Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 Seconds	T_L	260	°C

(1) UL Recognized mounting method is per Figure 4.
(2) Proper strike and creepage distance must be provided.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (3) (i_F = 10 Amp, T_C = 25°C) (i_F = 10 Amp, T_C = 125°C) (i_F = 20 Amp, T_C = 25°C) (i_F = 20 Amp, T_C = 125°C)	v_F	 0.85 0.75 0.95 0.85	Volts
Maximum Instantaneous Reverse Current (3) (Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 125°C)	i_R	 0.15 150	mA

(3) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

3

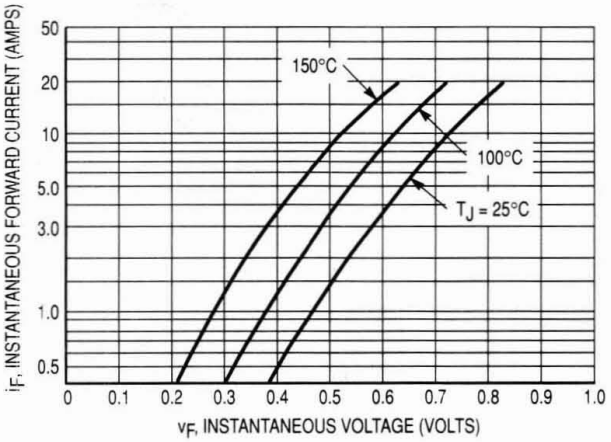

Figure 1. Typical Forward Voltage Per Diode

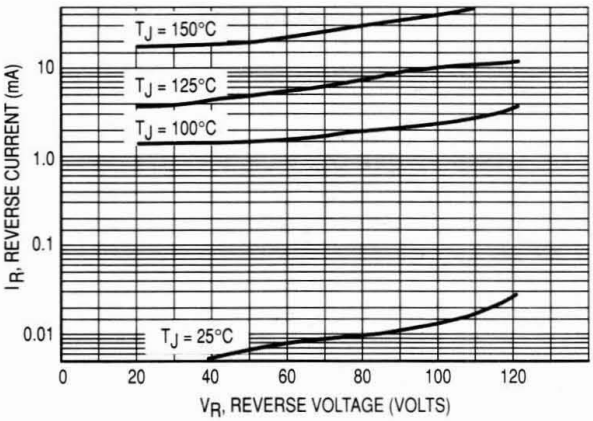

Figure 2. Typical Reverse Current Per Diode

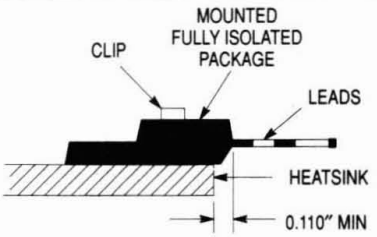

Figure 3. Clip Mounting Position for Isolation Test Number 1

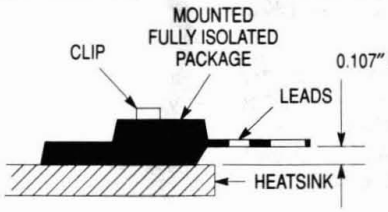

Figure 4. Clip Mounting Position for Isolation Test Number 2

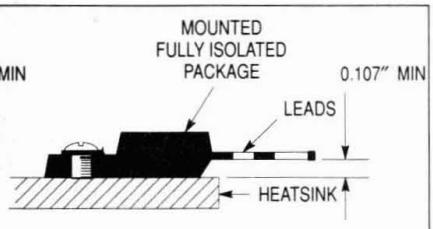

Figure 5. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

3

MOUNTING INFORMATION**

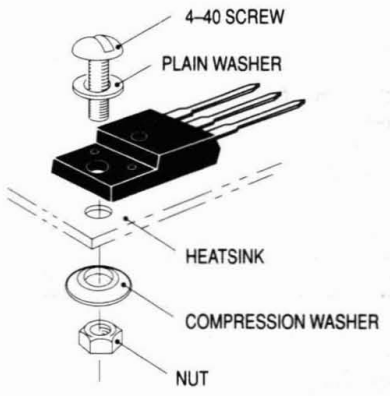

6a. Screw–Mounted

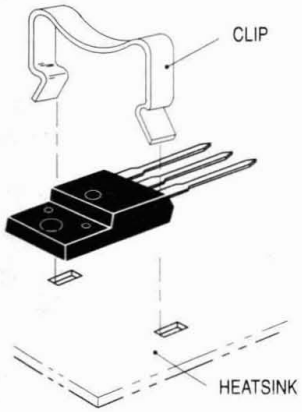

6b. Clip–Mounted

Figure 6. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

SWITCHMODE™ Schottky Power Rectifiers

MBRF20200CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 20 AMPERES 150 and 200 VOLTS



CASE 221D–02 ISOLATED TO–220

The SWITCHMODE Power Rectifier employs the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use as rectifiers in very low–voltage, high–frequency switching power supplies, free wheeling diodes and polarity protection diodes.

- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop
- Matched Dual Die Construction
- High Junction Temperature Capability
- High dv/dt Capability
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection
- Epoxy Meets UL94, V_O at 1/8″
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369



Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B20200

MAXIMUM RATINGS, PER LEG

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Current (Rated V_R) T_C = 125°C	Per Leg Per Package	$I_{F(AV)}$	10 20	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz) T_C = 90°C		I_{FRM}	20	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)		I_{RRM}	1.0	Amp
Operating Junction Temperature and Storage Temperature		T_J, T_{stg}	−65 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10,000	V/μs

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

THERMAL CHARACTERISTICS, PER LEG

Rating	Symbol	Value	Unit
Thermal Resistance — Junction to Case	$R_{\theta JC}$	3.5	°C/W

ELECTRICAL CHARACTERISTICS, PER LEG

Maximum Instantaneous Forward Voltage (1)	v_F		Volts
(i_F = 10 Amp, T_C = 25°C)		0.9	
(i_F = 10 Amp, T_C = 125°C)		0.8	
(i_F = 20 Amp, T_C = 25°C)		1.0	
(i_F = 20 Amp, T_C = 125°C)		0.9	
Maximum Instantaneous Reverse Current (1)	i_R		mA
(Rated dc Voltage, T_C = 25°C)		1.0	
(Rated dc Voltage, T_C = 125°C)		50	

DYNAMIC CHARACTERISTICS, PER LEG

Capacitance (V_R = −5.0 V, T_C = 25°C, Freq. = 1.0 MHz)	C_T	500	pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%

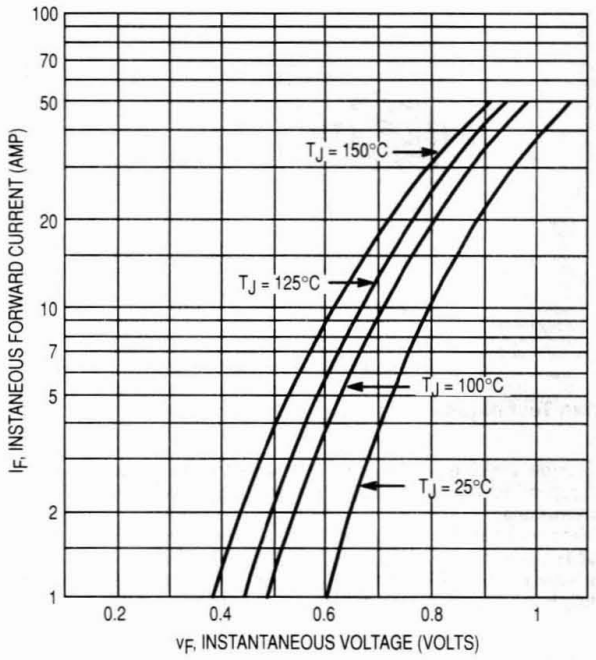

Figure 1. Typical Forward Voltage (Per Leg)

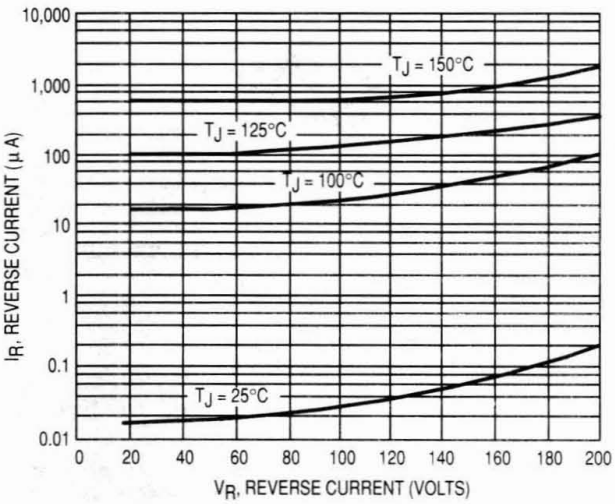

Figure 2. Typical Reverse Current (Per Leg)

TEST CONDITIONS FOR ISOLATION TESTS*

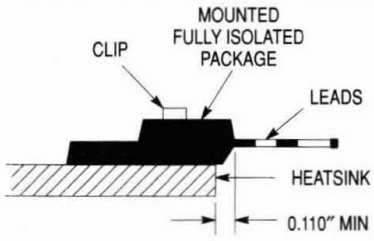

Figure 3. Screw or Clip Mounting Position for Isolation Test Number 1

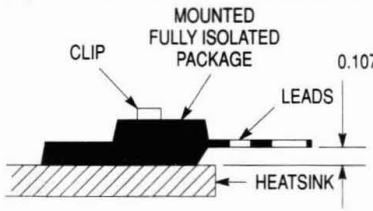

Figure 4. Clip Mounting Position for Isolation Test Number 2

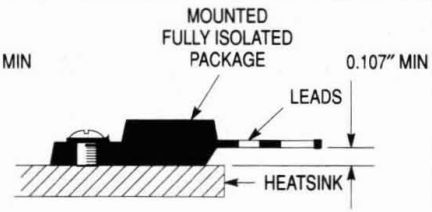

Figure 5. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

MOUNTING INFORMATION**

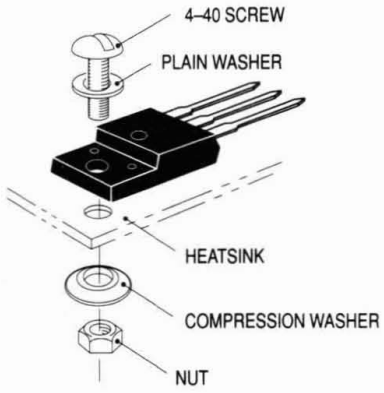

Figure 6a. Screw–Mounted

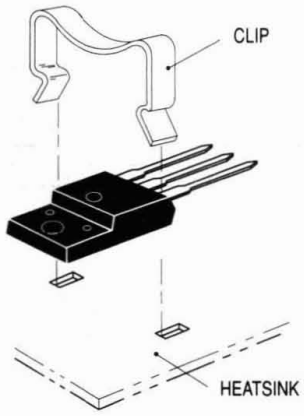

Figure 6b. Clip–Mounted

Figure 6. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

SWITCHMODE™ Schottky Power Rectifiers

MBRF2545CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 25 AMPERES 45 VOLTS



CASE 221D–02 ISOLATED TO–220

3

The SWITCHMODE Power Rectifier employs the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use as rectifiers in very low–voltage, high–frequency switching power supplies, free wheeling diodes and polarity protection diodes.

- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop
- Matched Dual Die Construction
- High Junction Temperature Capability
- High dv/dt Capability
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection
- Epoxy Meets UL94, V_O at 1/8″
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)



Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B2545

MAXIMUM RATINGS, PER LEG

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	45	Volts
Average Rectified Forward Current (Rated V_R), T_C = 125°C	Total Device	$I_{F(AV)}$	12.5 25	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 125°C		I_{FRM}	25	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)		I_{RRM}	1.0	Amp
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/μs
RMS Isolation Voltage (t = 1.0 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 3 Per Figure 4(1) Per Figure 5	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.5	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 Seconds	T_L	260	°C

(1) UL recognized mounting method is per Figure 4.
(2) Proper strike and creepage distance must be provided.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Characteristic		Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (3)	(i_F = 12.5 Amps, T_C = 25°C) (i_F = 12.5 Amps, T_C = 125°C)	v_F	0.7 0.62	Volts
Maximum Instantaneous Reverse Current (3)	(Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 125°C)	i_R	0.2 40	mA

(3) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.

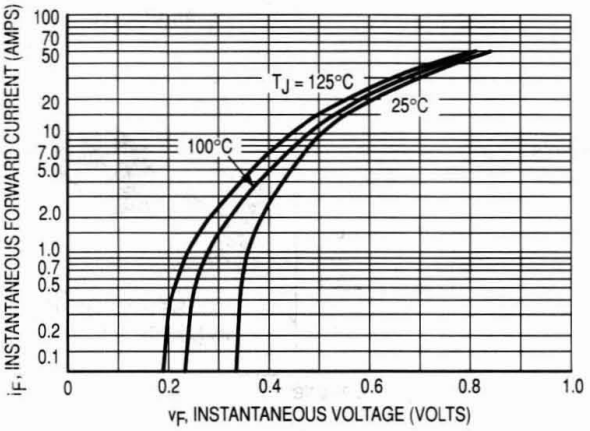

Figure 1. Typical Forward Voltage, Per Leg

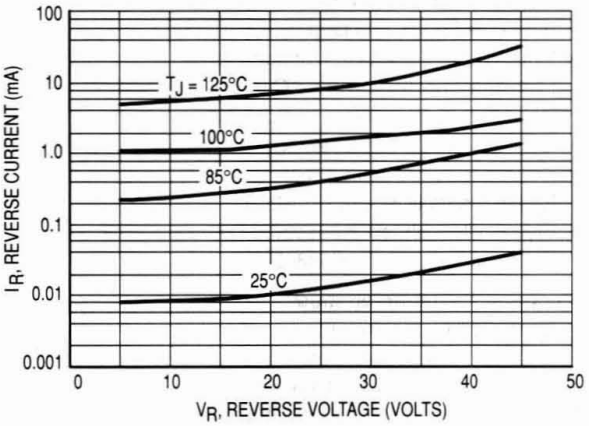

Figure 2. Typical Reverse Current, Per Leg

TEST CONDITIONS FOR ISOLATION TESTS*

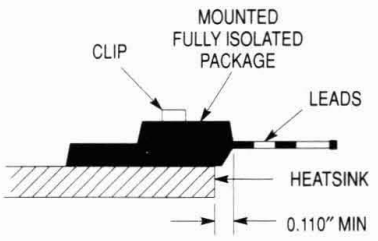

Figure 3. Clip Mounting Position for Isolation Test Number 1

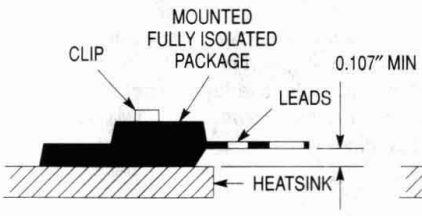

Figure 4. Clip Mounting Position for Isolation Test Number 2

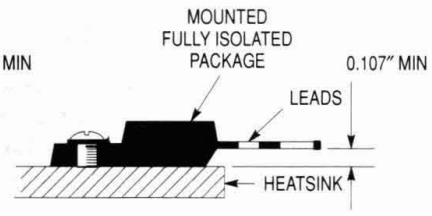

Figure 5. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

MOUNTING INFORMATION**

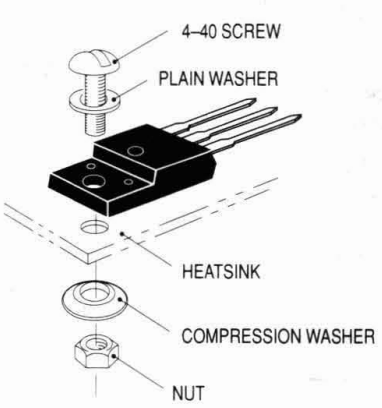

6a. Screw–Mounted

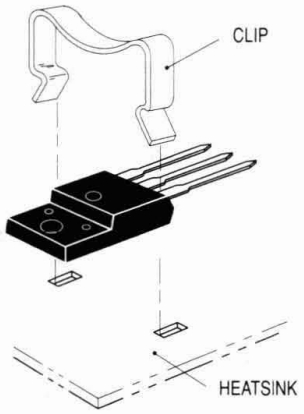

6b. Clip–Mounted

Figure 6. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

SWITCHMODE™ Schottky Power Rectifiers

MBRF745

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 7.5 AMPERES 45 VOLTS

CASE 221E–01 ISOLATED TO–220

The SWITCHMODE Power Rectifier employs the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use as rectifiers in very low–voltage, high–frequency switching power supplies, free wheeling diodes and polarity protection diodes.

- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop
- High Junction Temperature Capability
- High dv/dt Capability
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection
- Epoxy Meets UL94, VO at 1/8″
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B745

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	45	Volts
Average Rectified Forward Current (Rated V_R), T_C = 105°C		$I_{F(AV)}$	7.5	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 105°C		I_{FRM}	15	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 µs, 1.0 kHz)		I_{RRM}	1.0	Amp
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/µs
RMS Isolation Voltage (t = 1 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 3 Per Figure 4(1) Per Figure 5	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.2	°C/W
Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 Seconds	T_L	260	°C

(1) UL Recognized mounting method is per Figure 4.
(2) Proper strike and creepage distance must be provided.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (3)	v_F		Volts
(i_F = 15 Amp, T_C = 25°C)		0.84	
(i_F = 15 Amp, T_C = 125°C)		0.72	
(i_F = 7.5 Amp, T_C = 125°C)		0.57	
Maximum Instantaneous Reverse Current (3)	i_R		mA
(Rated DC Voltage, T_C = 25°C)		0.1	
(Rated DC Voltage, T_C = 125°C)		15	

(3) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.

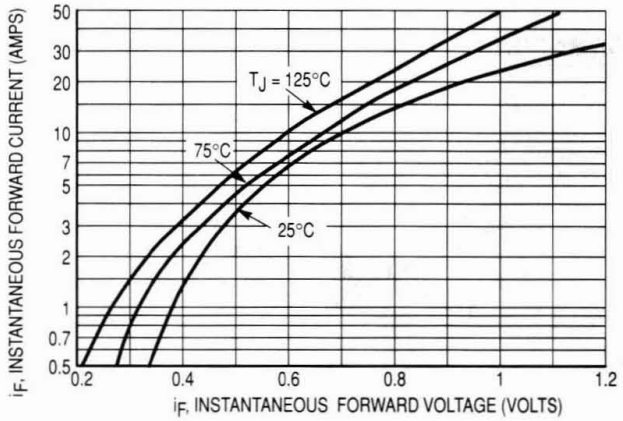

Figure 1. Typical Forward Voltage

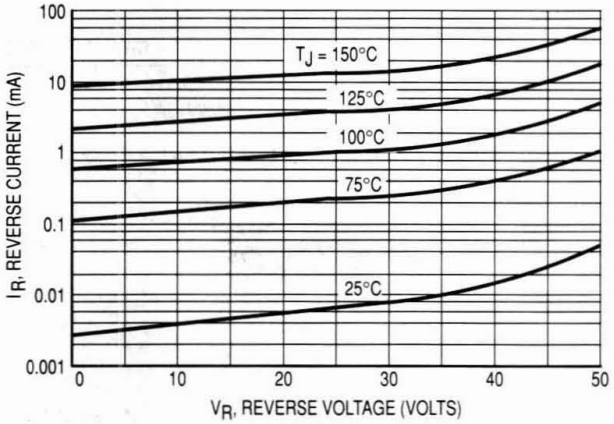

Figure 2. Typical Reverse Current

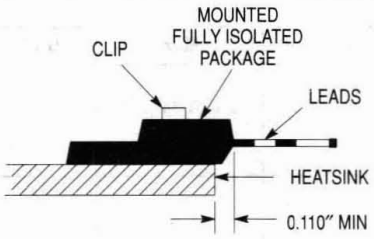

Figure 3. Clip Mounting Position for Isolation Test Number 1

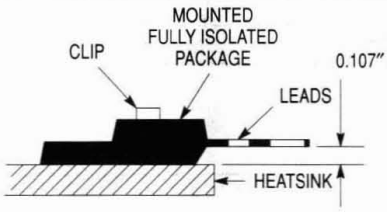

Figure 4. Clip Mounting Position for Isolation Test Number 2

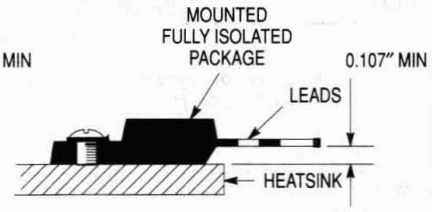

Figure 5. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

3

MOUNTING INFORMATION**

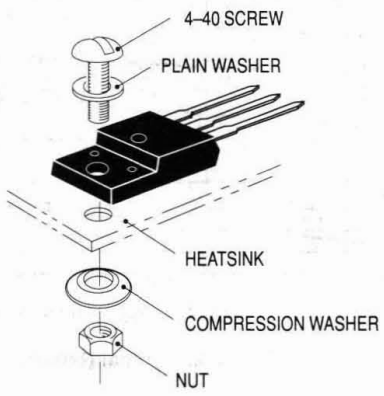

6a. Screw–Mounted

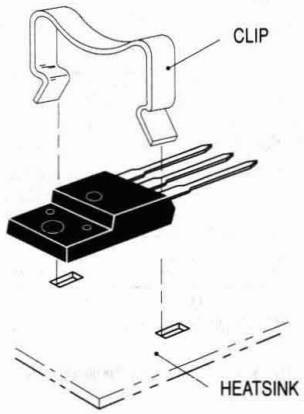

6b. Clip–Mounted

Figure 6. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

SWITCHMODE™ Schottky Power Rectifiers

MBRF1045

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 10 AMPERES 45 VOLTS

CASE 221E–01 ISOLATED TO–220

3

The SWITCHMODE Power Rectifier employs the Schottky Barrier principle in a large area metal–to–silicon power diode. State–of–the–art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for use as rectifiers in very low–voltage, high–frequency switching power supplies, free wheeling diodes and polarity protection diodes.

- Highly Stable Oxide Passivated Junction
- Very Low Forward Voltage Drop
- High Junction Temperature Capability
- High dv/dt Capability
- Excellent Ability to Withstand Reverse Avalanche Energy Transients
- Guardring for Stress Protection
- Epoxy Meets UL94, VO at 1/8″
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: B1045

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	45	Volts
Average Rectified Forward Current (Rated V_R), T_C = 135°C		$I_{F(AV)}$	10	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 135°C		I_{FRM}	20	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	150	Amps
Peak Repetitive Reverse Surge Current (2.0 µs, 1.0 kHz) Figure 6		I_{RRM}	1.0	Amp
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/µs
RMS Isolation Voltage (t = 1 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 8 Per Figure 9(1) Per Figure 10	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.0	°C/W
Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 seconds	T_L	260	°C

(1) UL Recognized mounting method is per Figure 9.
(2) Proper strike and creepage distance must be provided.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (3) (i_F = 20 Amp, T_C = 25°C) (i_F = 20 Amp, T_C = 125°C) (i_F = 10 Amp, T_C = 125°C)	v_F	 0.84 0.72 0.57	Volts
Maximum Instantaneous Reverse Current (3) (Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 125°C)	i_R	 0.1 15	mA

(3) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

3

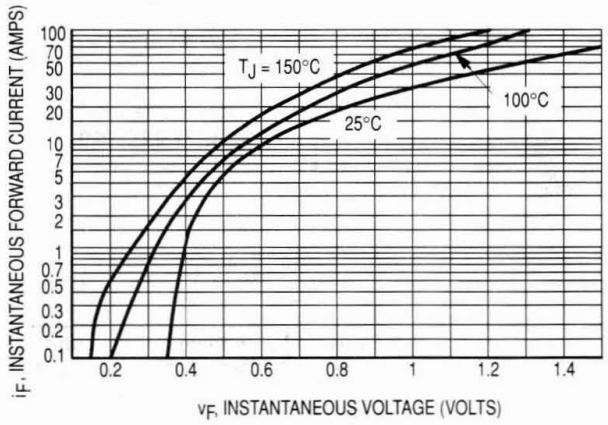

Figure 1. Maximum Forward Voltage

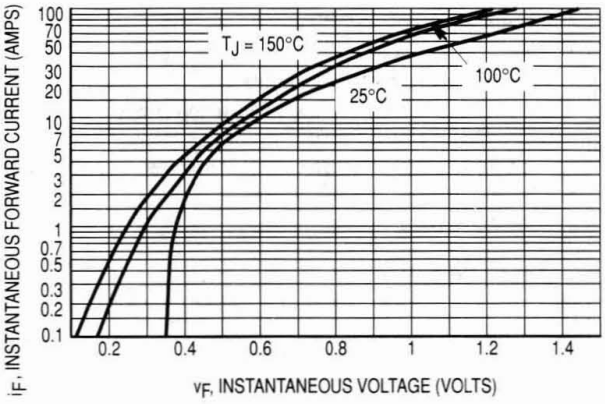

Figure 2. Typical Forward Voltage

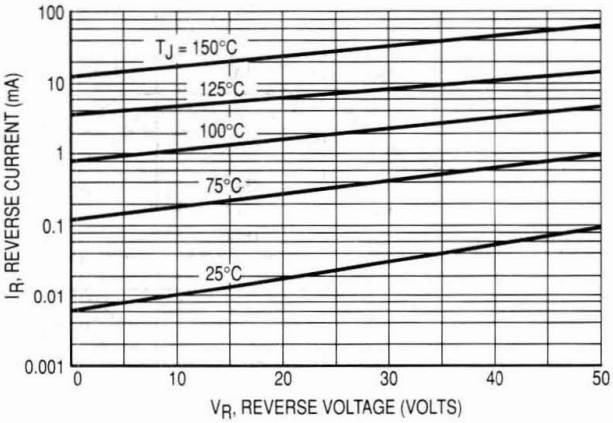

Figure 3. Maximum Reverse Current

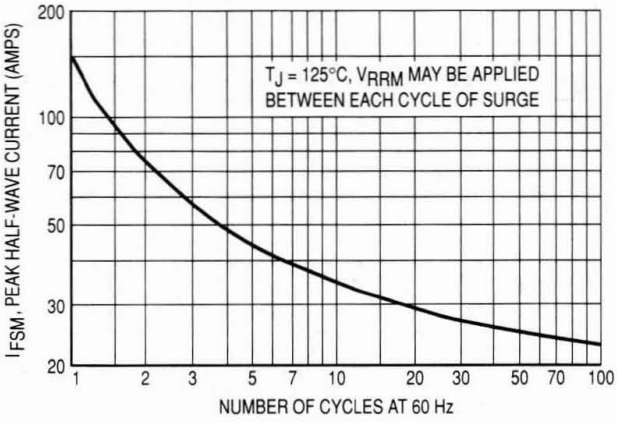

Figure 4. Maximum Surge Capability

HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 5.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 percent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

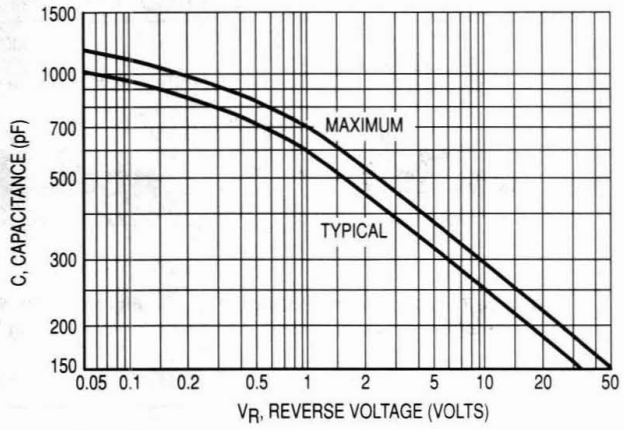

Figure 5. Capacitance

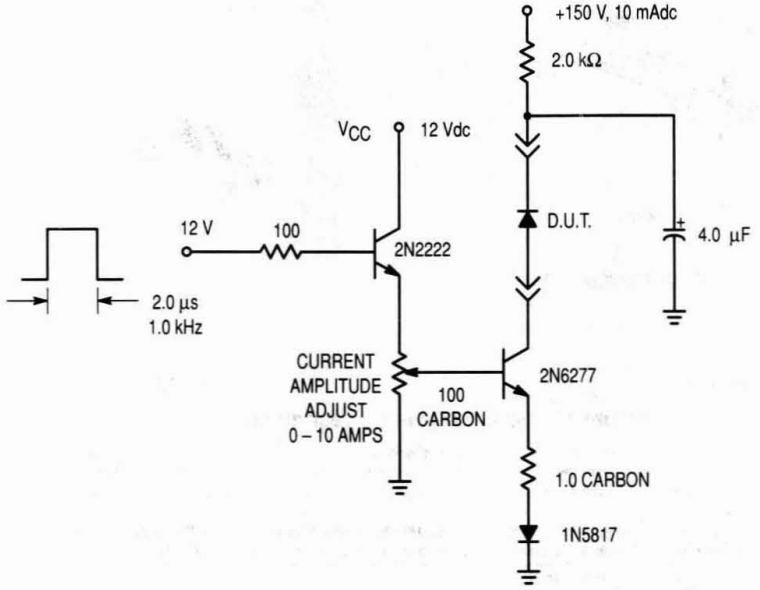

Figure 6. Test Circuit for dv/dt and Reverse Surge Current

TEST CONDITIONS FOR ISOLATION TESTS*

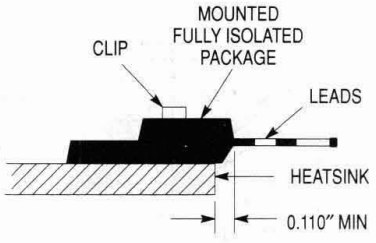

Figure 7. Clip Mounting Position for Isolation Test Number 1

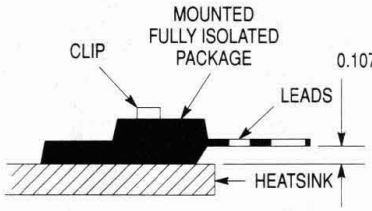

Figure 8. Clip Mounting Position for Isolation Test Number 2

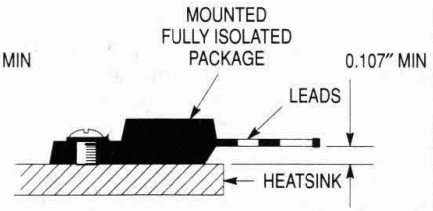

Figure 9. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

MOUNTING INFORMATION**

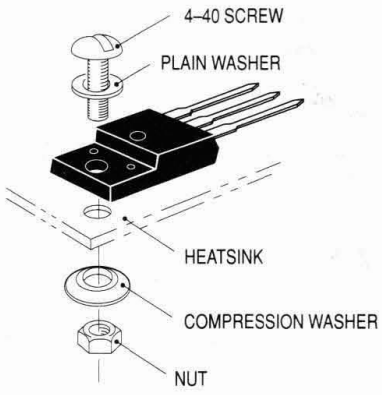

10a. Screw–Mounted

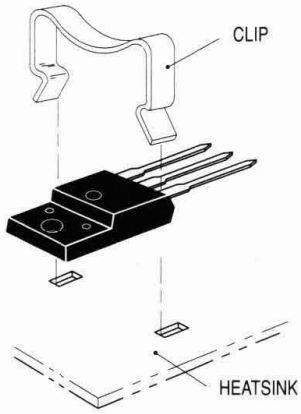

10b. Clip–Mounted

Figure 10. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

MBR3035PT
MBR3045PT

MBR3045PT is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Dual Diode Construction — Terminals 1 and 3 May Be Connected For Parallel Operation At Full Rating
- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: B3035, B3045

SCHOTTKY BARRIER RECTIFIERS

30 AMPERES
35 to 45 VOLTS

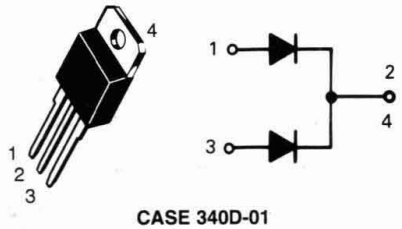

CASE 340D-01

3

RATINGS

Rating		Symbol	Maximum	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	MBR3035PT MBR3045PT	V_{RRM} V_{RWM} V_R	35 45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 105°C	Per Device Per Diode	$I_{F(AV)}$	30 15	Amps
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz)		I_{FRM}	30	Amps
Nonrepetitive Peak Surge Current (Surge Applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	200	Amps
Peak Repetitive Reverse Current, Per Diode (2.0 μs, 1.0 kHz) See Figure 6		I_{RRM}	2.0	Amps
Operating Junction Temperature		T_J	-65 to +150	°C
Storage Temperature		T_{stg}	-65 to +175	°C
Peak Surge Junction Temperature (Forward Current Applied)		$T_{J(pk)}$	175	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/μs

THERMAL CHARACTERISTICS PER DIODE

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	40	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Instantaneous Forward Voltage (1) (i_F = 20 Amp, T_C = 125°C) (i_F = 30 Amp, T_C = 125°C) (i_F = 30 Amp, T_C = 25°C)		v_F	 0.60 0.72 0.76	Volts
Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)		i_R	 100 1.0	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 2

FIGURE 1 — TYPICAL FORWARD VOLTAGE

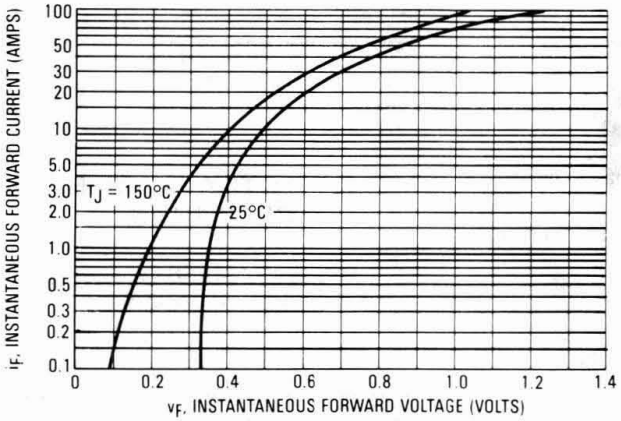

FIGURE 2 — TYPICAL REVERSE CURRENT

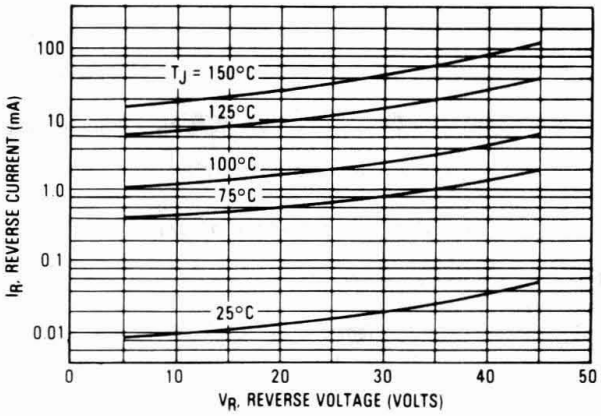

FIGURE 3 — CURRENT DERATING PER LEG

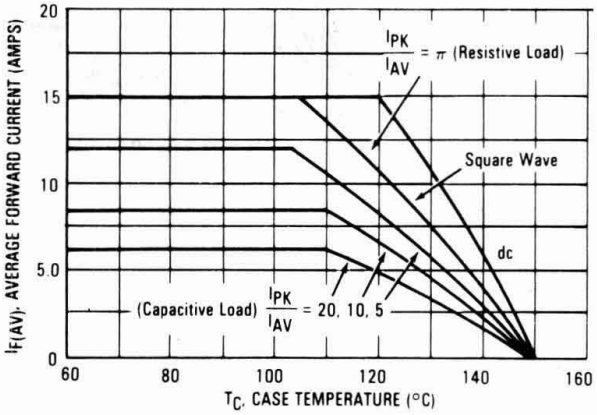

FIGURE 4 — FORWARD POWER DISSIPATION PER LEG

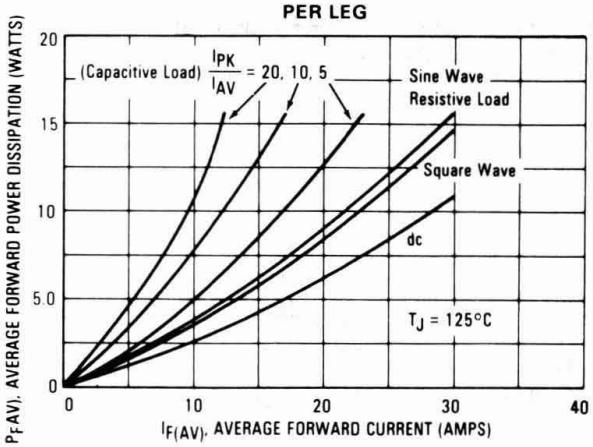

FIGURE 5 — CAPACITANCE

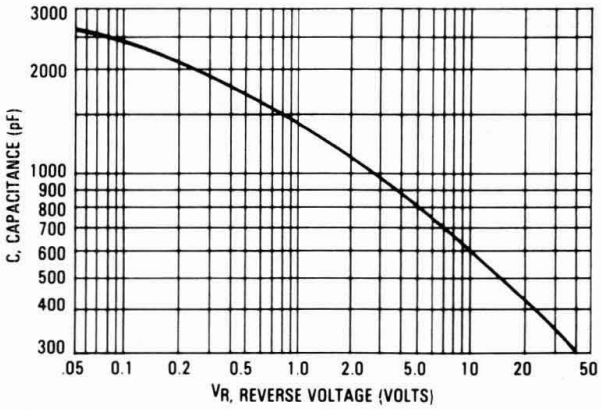

FIGURE 6 — TEST CIRCUIT FOR REPETITIVE REVERSE CURRENT

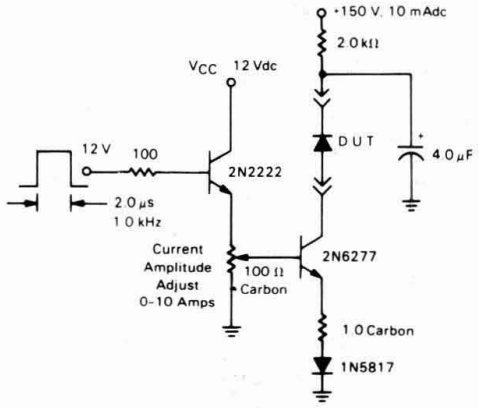

SWITCHMODE Power Rectifier

MBR4045PT

SCHOTTKY BARRIER RECTIFIER 40 AMPERES 45 VOLTS

The SWITCHMODE power rectifier employs the use of the Schottky Barrier principle with a Platinum barrier metal. This state-of-the-art device has the following features:

- Dual Diode Construction — Terminals 1 and 3 may be connected for Parallel Operation at Full Rating
- 45 Volt Blocking Voltage
- Low Forward Voltage Drop
- Guardring for Stress Protection and High dv/dt Capability (> 10 V/ns)
- Guaranteed Reverse Avalanche
- 150°C Operating Junction Temperature

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: B4045





CASE 340D-01

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	Volt
Average Rectified Forward Current (Rated V_R) @ T_C = 125°C Total Device	$I_{F(AV)}$	20 40	Amp
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz) @ T_C = 90°C	I_{FRM}	40	Amp
Non-repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	400	Amp
Peak Repetitive Reverse Current (2.0 µs, 1.0 kHz)	I_{RRM}	2.0	Amp
Operating Junction Temperature	T_J	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +175	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175	°C
Voltage Rate of Change	dv/dt	10,000	V/µs

THERMAL CHARACTERISTICS, PER LEG

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	°C/W

ELECTRICAL CHARACTERISTICS, PER LEG

Instantaneous Forward Voltage (1) (i_F = 20 Amps, T_C = 25°C) (i_F = 20 Amps, T_C = 125°C) (i_F = 40 Amps, T_C = 25°C) (i_F = 40 Amps, T_C = 125°C)	v_F	 0.70 0.60 0.80 0.75	Volts
Instantaneous Reverse Current (1) (Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 100°C)	i_R	 1.0 50	mA

(1) Pulse Test: Pulse Width = 300 µs, Duty Cycle ≤ 2.0%.

Rev 2

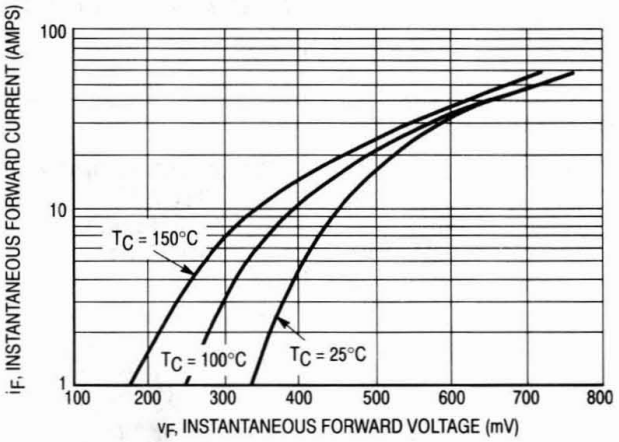

Figure 1. Typical Forward Voltage

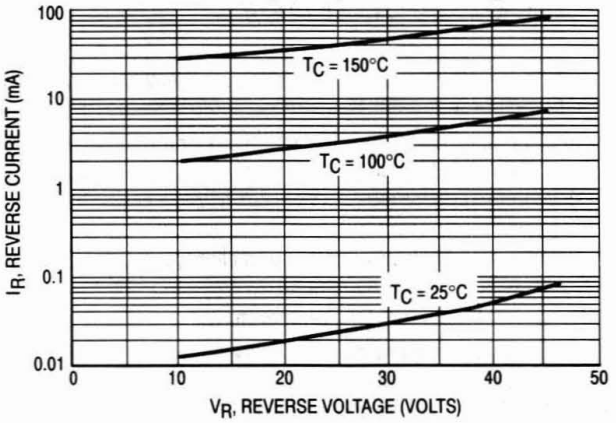

Figure 2. Typical Reverse Current

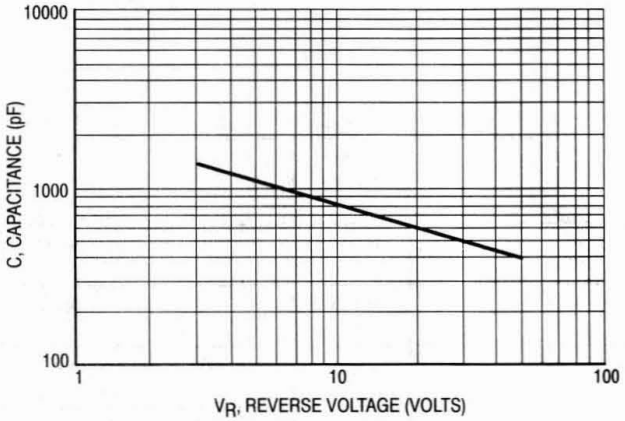

Figure 3. Typical Capacitance Per Leg

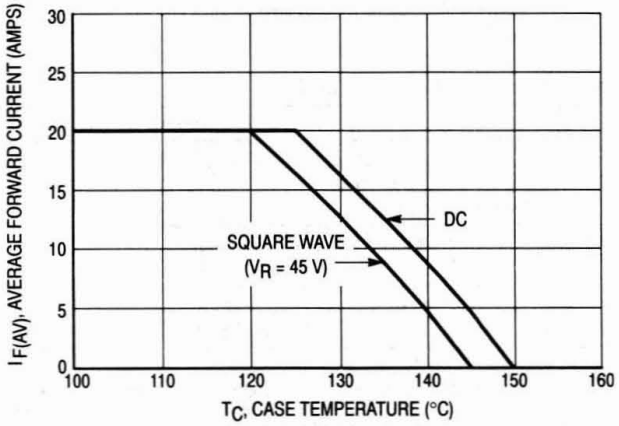

Figure 4. Current Derating Per Leg

SWITCHMODE
Power Rectifier

MBR6045PT

**SCHOTTKY BARRIER
RECTIFIER
60 AMPERES
45 VOLTS**

The SWITCHMODE power rectifier employs the use of the Schottky Barrier principle with a Platinum barrier metal. This state-of-the-art device has the following features:

- Dual Diode Construction — Terminals 1 and 3 may be connected for Parallel Operation at Full Rating
- 45 Volt Blocking Voltage
- Low Forward Voltage Drop
- Guardring for Stress Protection and High dv/dt Capability
- Guaranteed Reverse Avalanche
- 150°C Operating Junction Temperature

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: B6045





CASE 340D-01

3

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	Volt
Average Rectified Forward Current (Rated V_R) @ T_C = 125°C Total Device	$I_{F(AV)}$	30 60	Amp
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz) @ T_C = 90°C	I_{FRM}	60	Amp
Non-repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	500	Amp
Peak Repetitive Reverse Current (2.0 μs, 1.0 kHz)	I_{RRM}	2.0	Amp
Operating Junction Temperature	T_J	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +175	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175	°C
Voltage Rate of Change	dv/dt	10,000	V/μs

THERMAL CHARACTERISTICS, PER LEG

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W

ELECTRICAL CHARACTERISTICS, PER LEG

Instantaneous Forward Voltage (1) (i_F = 30 Amps, T_C = 25°C) (i_F = 30 Amps, T_C = 125°C) (i_F = 60 Amps, T_C = 25°C)	v_F	 0.62 0.55 0.75	Volts
Instantaneous Reverse Current (1) (Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 100°C)	i_R	 1.0 50	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 2

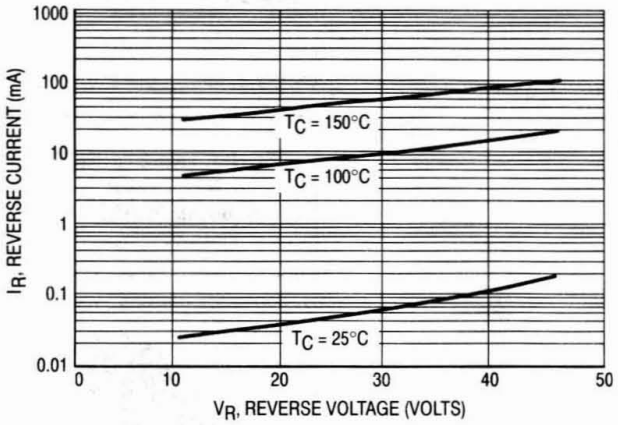

Figure 1. Typical Reverse Current

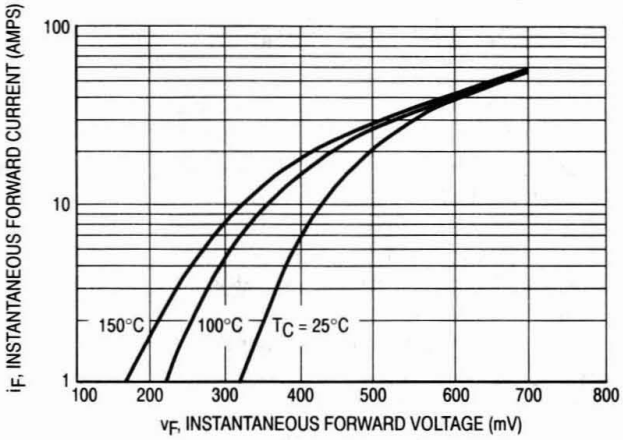

Figure 2. Typical Forward Voltage

SWITCHMODE Power Rectifier

MBR5025L

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER LOW v_F 50 AMPERES 25 VOLTS

The SWITCHMODE power rectifier employs the use of the Schottky Barrier principle with a Platinum barrier metal. This state-of-the-art device has the following features:

- Very Low Forward Voltage Drop (Max 0.58 V @ 100°C)
- Guardring for Stress Protection and High dv/dt Capability (10 V/ns)
- Guaranteed Reverse Avalanche
- 150°C Operating Junction Temperature
- Specially Designed for SWITCHMODE Power Supplies with Operating Frequency up to 300 kHz

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: B5025L



CASE 340E-01

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	25	Volts
Average Rectified Forward Current (Rated V_R) T_C = 125°C	$I_{F(AV)}$	50	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 90°C	I_{FRM}	150	Amps
Non-repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	300	Amps
Peak Repetitive Reverse Current (2.0 µs, 1.0 kHz)	I_{RRM}	2.0	Amps
Operating Junction Temperature	T_J	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +175	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175	°C
Voltage Rate of Change	dv/dt	10,000	V/µs

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.75	°C/W

ELECTRICAL CHARACTERISTICS

Instantaneous Forward Voltage (1) (i_F = 50 Amps, T_C = 25°C) (i_F = 50 Amps, T_C = 100°C) (i_F = 30 Amps, T_C = 25°C)	v_F	 0.62 0.58 0.54	Volts
Instantaneous Reverse Current (1) (Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 100°C)	i_R	 0.5 60	mA

(1) Pulse Test: Pulse Width = 300 µs, Duty Cycle ≤ 2.0%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

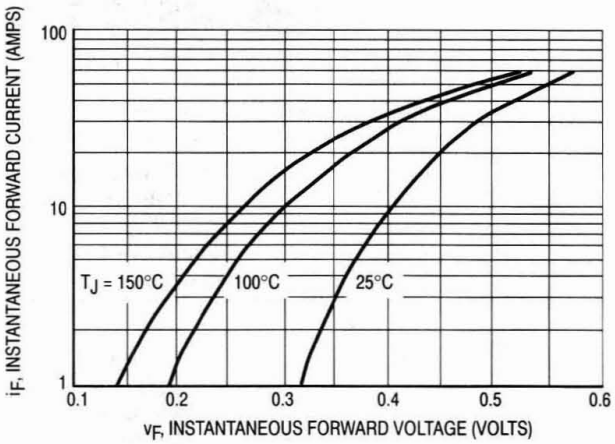

Figure 1. Typical Forward Voltage

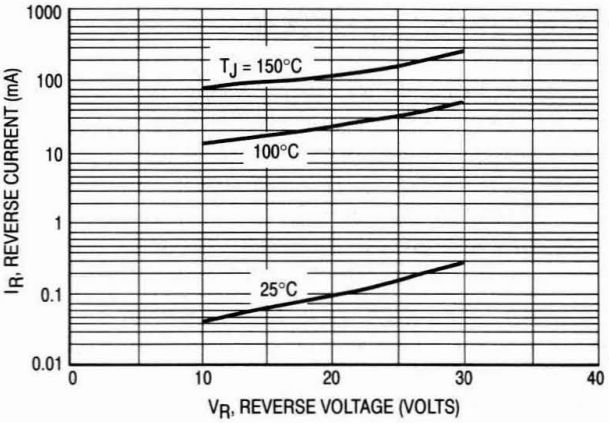

Figure 2. Typical Reverse Current

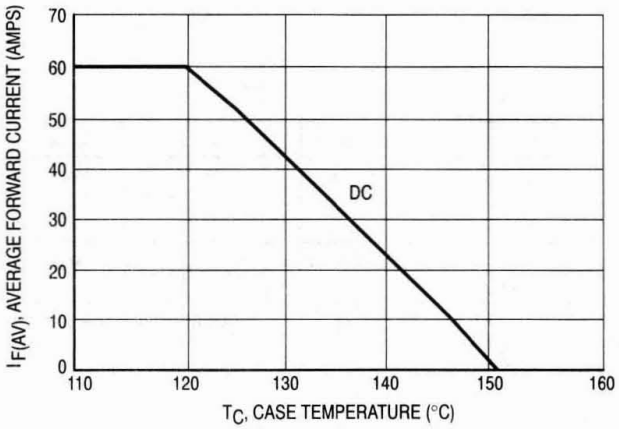

Figure 3. Current Derating, Case

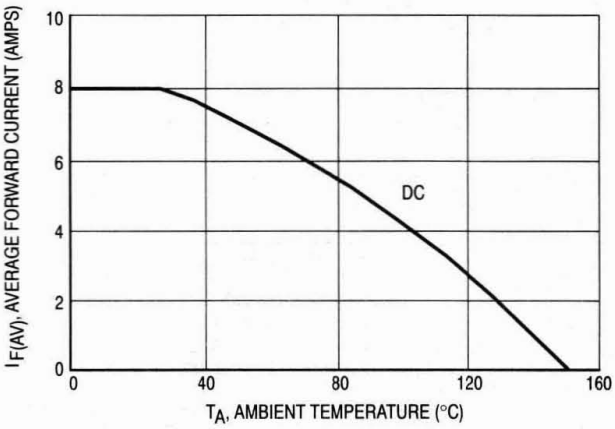

Figure 4. Current Derating, Ambient

Switchmode Power Rectifiers

MBR3035WT
MBR3045WT

MBR3045WT is a Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIERS 30 AMPERES 35–45 VOLTS

3

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Dual Diode Construction — Terminals 1 and 3 May Be Connected For Parallel Operation At Full Rating
- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche
- Popular TO-247 Package



Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: B3035, B3045

CASE 340F-03
TO-247AC

MAXIMUM RATINGS

Rating	Symbol	MBR 3035WT	MBR 3045WT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 105°C — Per Device Per Diode	$I_{F(AV)}$	30 15		Amps
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz)	I_{FRM}	30		Amps
Nonrepetitive Peak Surge Current (Surge Applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	200		Amps
Peak Repetitive Reverse Current, Per Diode (2.0 μs, 1.0 kHz) See Figure 6	I_{RRM}	2.0		Amps
Operating Junction Temperature	T_J	−65 to +150		°C
Storage Temperature	T_{stg}	−65 to +175		°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175		°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000		V/μs

THERMAL CHARACTERISTICS (Per Diode)

Thermal Resistance — Junction to Case — Junction to Ambient	$R_{\theta JC}$ $R_{\theta JA}$	1.4 40	°C/W

ELECTRICAL CHARACTERISTICS (Per Diode)

Instantaneous Forward Voltage (1) (i_F = 20 Amp, T_C = 125°C) (i_F = 30 Amp, T_C = 125°C) (i_F = 30 Amp, T_C = 25°C)	v_F	 0.6 0.72 0.76	Volts
Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 100 1.0	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 1

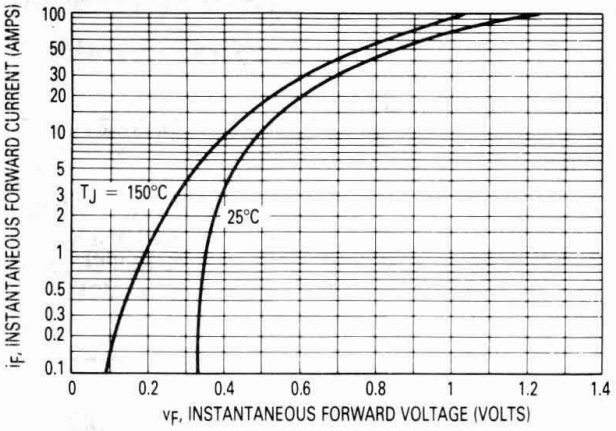

Figure 1. Typical Forward Voltage

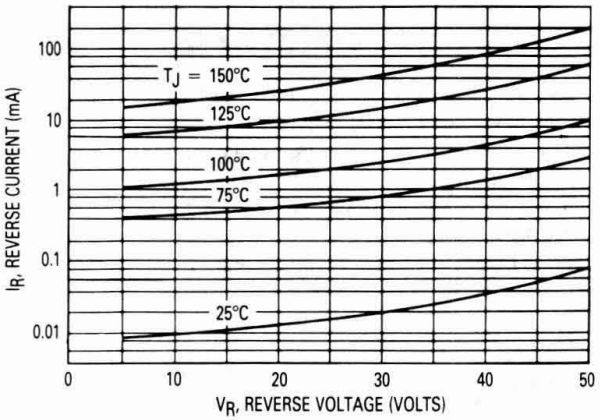

Figure 2. Typical Reverse Current

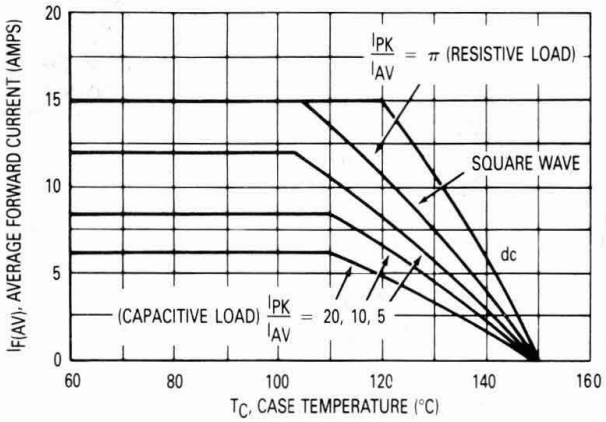

Figure 3. Current Derating (Per Leg)

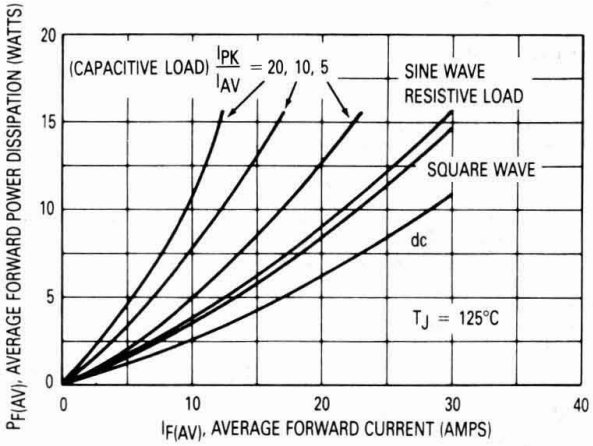

Figure 4. Forward Power Dissipation (Per Leg)

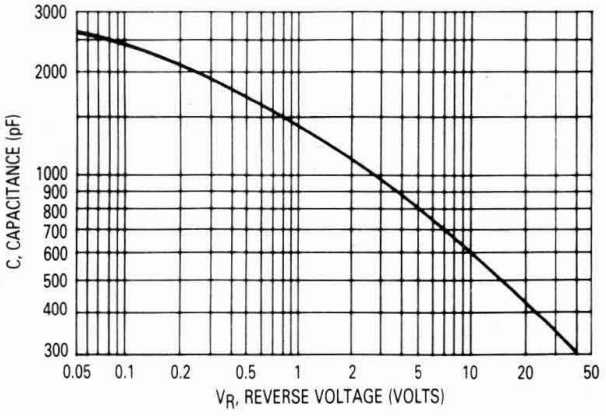

Figure 5. Capacitance

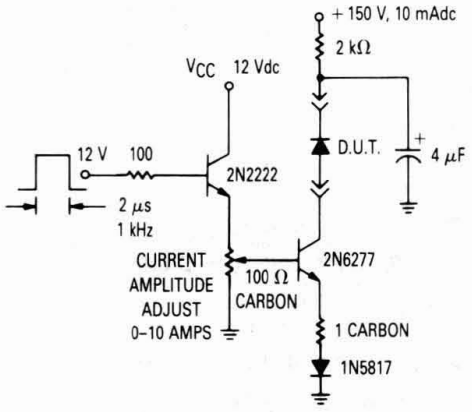

Figure 6. Test Circuit For Repetitive Reverse Current

Advance Information

SWITCHMODE™ Power Rectifier

MBR4015LWT
Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 40 AMPERES 15 VOLTS

. . . using the Schottky Barrier principle this state–of–the–art device is dedicated to the ORing function in paralleling power supply and has the following features:

- Dual Diode Construction — Terminals 1 and 3 May Be Connected for Parallel Operation at Full Rating
- 15 Volt Blocking Voltage
- Very Low Forward Voltage Drop
- Guardring for Stress Protection and High dv/dt Capability
- Guaranteed Reverse Avalanche
- 150°C Operating Junction Temperature

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 Units Per Plastic Tube
- Marking: B4015L

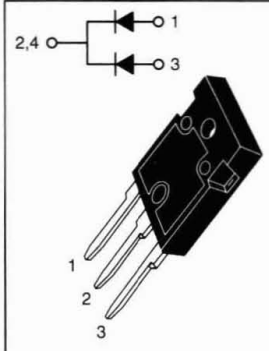

CASE 340F–03
TO–247AC

3

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	15	Volt
Average Rectified Forward Current — Per Diode (Rated V_R) @ T_C = 125°C — Per Device	$I_{F(AV)}$	20 40	Amp
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz) @ T_C = 90°C	I_{FRM}	40	Amp
Non Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	400	Amp
Peak Repetitive Reverse Current (2.0 μs, 1.0 kHz)	I_{RRM}	2.0	Amp
Operating Junction Temperature	T_J	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +150	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	150	°C
Voltage Rate of Change	dv/dt	10000	V/μs

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case — Junction to Ambient	$R_{\theta JC}$ $R_{\theta JA}$	1.4 40	°C/W

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS

Rating	Symbol	Max	Unit
Instantaneous Forward Voltage (1)	V_F		Volts
@ I_F = 20 Amps, T_C = 25°C		0.42	
@ I_F = 20 Amps, T_C = 125°C		0.33	
@ I_F = 40 Amps, T_C = 25°C		0.50	
@ I_F = 40 Amps, T_C = 125°C		0.42	
Instantaneous Reverse Current (1)	I_R		mA
@ Rated DC Voltage, T_C = 25°C		5.0	
@ Rated DC Voltage, T_C = 75°C		150	

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle < 2.0%

3

SWITCHMODE
Schottky Power Rectifier

MBR4045WT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 40 AMPERES 45 VOLTS

The SWITCHMODE power rectifier employs the use of the Schottky Barrier principle with a Platinum barrier metal. This state-of-the-art device has the following features:

- Dual Diode Construction — Terminals 1 and 3 may be connected for Parallel Operation at Full Rating
- 45 Volt Blocking Voltage
- Low Forward Voltage Drop
- Guardring for Stress Protection and High dv/dt Capability (> 10 V/ns)
- Guaranteed Reverse Avalanche
- 150°C Operating Junction Temperature

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: B4045





CASE 340F-03
TO-247AC

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	Volt
Average Rectified Forward Current (Rated V_R) @ T_C = 125°C — Total Device	$I_{F(AV)}$	20 40	Amp
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz) @ T_C = 90°C	I_{FRM}	40	Amp
Non-repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	400	Amp
Peak Repetitive Reverse Current (2.0 µs, 1.0 kHz)	I_{RRM}	2.0	Amp
Operating Junction Temperature	T_J	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +175	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175	°C
Voltage Rate of Change	dv/dt	10,000	V/µs

THERMAL CHARACTERISTICS, PER LEG

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	°C/W

ELECTRICAL CHARACTERISTICS, PER LEG

Instantaneous Forward Voltage (1) (i_F = 20 Amps, T_C = 25°C) (i_F = 20 Amps, T_C = 125°C) (i_F = 40 Amps, T_C = 25°C) (i_F = 40 Amps, T_C = 125°C)	v_F	 0.70 0.60 0.80 0.75	Volts
Instantaneous Reverse Current (1) (Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 100°C)	i_R	 1.0 50	mA

(1) Pulse Test: Pulse Width = 300 µs, Duty Cycle ≤ 2.0%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 2

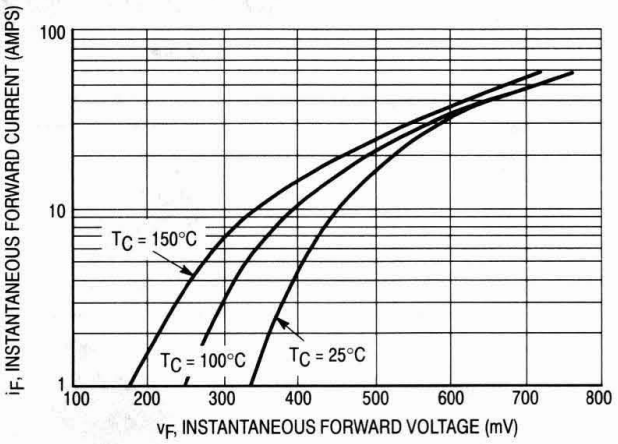

Figure 1. Typical Forward Voltage

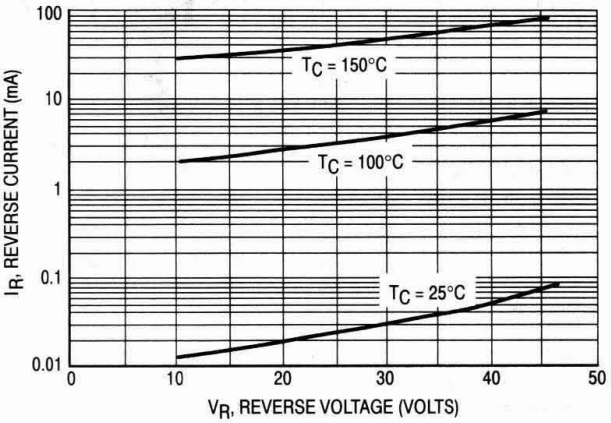

Figure 2. Typical Reverse Current

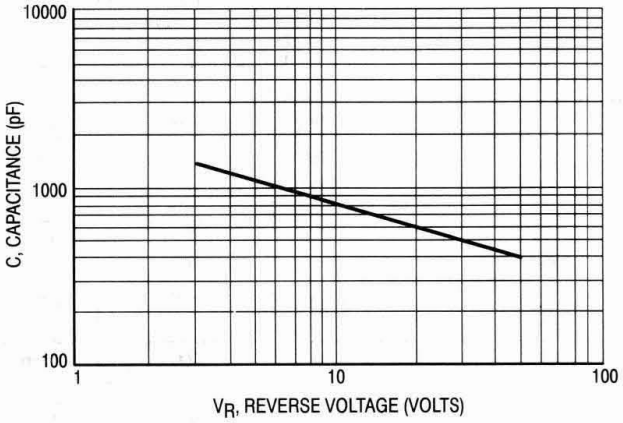

Figure 3. Typical Capacitance Per Leg

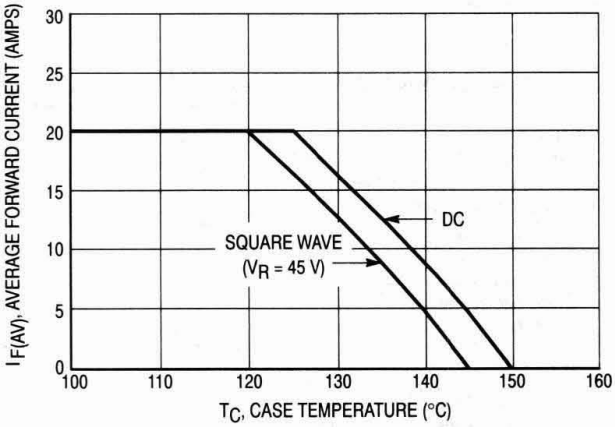

Figure 4. Current Derating Per Leg

SWITCHMODE Power Rectifier

MBR6045WT

SCHOTTKY BARRIER RECTIFIER 60 AMPERES 45 VOLTS

The SWITCHMODE power rectifier employs the use of the Schottky Barrier principle with a Platinum barrier metal. This state-of-the-art device has the following features:

- Dual Diode Construction — Terminals 1 and 3 may be connected for Parallel Operation at Full Rating
- 45 Volt Blocking Voltage
- Low Forward Voltage Drop
- Guardring for Stress Protection and High dv/dt Capability (> 10 V/ns)
- Guaranteed Reverse Avalanche
- 150°C Operating Junction Temperature

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: B6045





CASE 340F-03 TO-247AC

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	Volt
Average Rectified Forward Current (Rated V_R) @ T_C = 125°C Total Device	$I_{F(AV)}$	30 60	Amp
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz) @ T_C = 90°C	I_{FRM}	60	Amp
Non-repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	500	Amp
Peak Repetitive Reverse Current (2.0 μs, 1.0 kHz)	I_{RRM}	2.0	Amp
Operating Junction Temperature	T_J	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +175	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175	°C
Voltage Rate of Change	dv/dt	10,000	V/μs

THERMAL CHARACTERISTICS, PER LEG

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W

ELECTRICAL CHARACTERISTICS, PER LEG

Instantaneous Forward Voltage (1) (i_F = 30 Amps, T_C = 25°C) (i_F = 30 Amps, T_C = 125°C) (i_F = 60 Amps, T_C = 25°C)	v_F	 0.62 0.55 0.75	Volts
Instantaneous Reverse Current (1) (Rated DC Voltage, T_C = 25°C) (Rated DC Voltage, T_C = 100°C)	i_R	 1.0 50	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 2

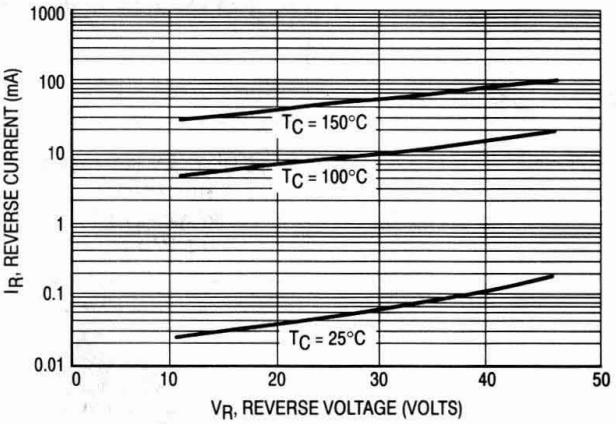

Figure 1. Typical Reverse Current

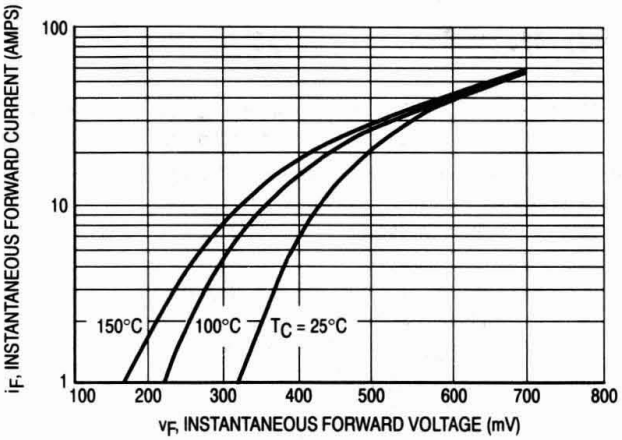

Figure 2. Typical Forward Voltage

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

1N5826
1N5827
1N5828

1N5826 and 1N5828 are
Motorola Preferred Devices

Designer's Data Sheet

Power Rectifiers

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features chrome barrier metal, epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

- Extremely Low v_F
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency
- High Surge Capacity

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 45.6 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 15 lb-in max
- Shipped 25 units per rail
- Marking: 1N5826, 1N5827, 1N5828

SCHOTTKY BARRIER RECTIFIERS

15 AMPERE
20,30,40 VOLTS

3

CASE 56-03
DO-203AA
METAL

Rating	Symbol	1N5826	1N5827	1N5828	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	Volts
Non-Repetitive Peak Reverse Voltage	V_{RSM}	24	36	48	Volts
Average Rectified Forward Current $V_{R(equiv)} \leq 0.2\ V_{R(dc)}$, $T_C = 85^oC$	I_O	← 15 →			Amp
Ambient Temperature Rated $V_{R(dc)}$, $P_{F(AV)} = 0$, $R_{\theta JA} = 5.0^oC/W$	T_A	95	90	85	^oC
Non-Repetitive Peak Surge Current (surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	← 500 (for 1 cycle) →			Amp
Operating and Storage Junction Temperature Range (Reverse voltage applied)	T_J, T_{stg}	← -65 to +125 →			^oC
Peak Operating Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	← 150 →			^oC

*THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.5	$^oC/W$

*ELECTRICAL CHARACTERISTICS ($T_C = 25^oC$ unless otherwise noted.)

Characteristic	Symbol	1N5826	1N5827	1N5828	Unit
Maximum Instantaneous Forward Voltage (1) (i_F = 8.0 Amp) (i_F = 15 Amp) (i_F = 47.1 Amp)	v_F	 0.380 0.440 0.670	 0.400 0.470 0.770	 0.420 0.500 0.870	Volts
Maximum Instantaneous Reverse Current @ rated dc Voltage (1) $T_C = 100^oC$	i_R	 10 75	 10 75	 10 75	mA

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%.

Rev 1

NOTE 1: DETERMINING MAXIMUM RATINGS

Reverse power dissipation and the possibility of thermal runaway must be considered when operating this rectifier at reverse voltages above 0.2 V_{RWM}. Proper derating may be accomplished by use of equation (1):

$$T_{A(max)} = T_{J(max)} - R_{\theta JA} P_{F(AV)} - R_{\theta JA} P_{R(AV)} \quad (1)$$

where

$T_{A(max)}$ = Maximum allowable ambient temperature

$T_{J(max)}$ = Maximum allowable junction temperature (125°C or the temperature at which thermal runaway occurs, whichever is lowest).

$P_{F(AV)}$ = Average forward power dissipation

$P_{R(AV)}$ = Average reverse power dissipation

$R_{\theta JA}$ = Junction-to-ambient thermal resistance

Figures 1, 2 and 3 permit easier use of equation (1) by taking reverse power dissipation and thermal runaway into consideration. The figures solve for a reference temperature as determined by equation (2):

$$T_R = T_{J(max)} - R_{\theta JA} P_{R(AV)} \quad (2)$$

Substituting equation (2) into equation (1) yields:

$$T_{A(max)} = T_R - R_{\theta JA} P_{F(AV)} \quad (3)$$

Inspection of equations (2) and (3) reveals that T_R is the ambient temperature at which thermal runaway occurs or where T_J = 125°C, when forward power is zero. The transition from one boundary condition to the other is evident on the curves of Figures 1, 2 and 3 as a difference in the rate of change of the slope in the vicinity of 115°C. The data of Figures 1, 2 and 3 is based upon dc conditions. For use in common rectifier circuits, Table I indicates suggested factors for an equivalent dc voltage to use for conservative design; i.e.:

$$V_{R(equiv)} = V_{in(PK)} \times F \quad (4)$$

The Factor F is derived by considering the properties of the various rectifier circuits and the reverse characteristics of Schottky diodes.

Example: Find $T_{A(max)}$ for 1N5828 operated in a 12-Volt dc supply using a bridge circuit with capacitive filter such that I_{DC} = 10 A ($I_{F(AV)}$ = 5 A), $I_{(PK)}/I_{(AV)}$ = 20, Input Voltage = 10 V(rms), $R_{\theta JA}$ = 5°C/W.

Step 1: Find $V_{R(equiv)}$. Read F = 0.65 from Table I ∴
$V_{R(equiv)} = (1.41)(10)(0.65) = 9.18$ V

Step 2: Find T_R from Figure 3. Read T_R = 121°C @ V_R = 9.18 & $R_{\theta JA}$ = 5°C/W

Step 3: Find $P_{F(AV)}$ from Figure 4.** Read $P_{F(AV)}$ = 10 W @ $\frac{I_{(PK)}}{I_{(AV)}}$ = 20 & $I_{F(AV)}$ = 5 A

Step 4: Find $T_{A(max)}$ from equation (3). $T_{A(max)}$ = 121-(5)(10) = 71°C

** Value given are for the 1N5828. Power is slightly lower for the other units because of their lower forward voltage.

TABLE I – VALUES FOR FACTOR F

Circuit	Half Wave		Full Wave, Bridge		Full Wave, Center Tapped *†	
Load	Resistive	Capacitive *	Resistive	Capacitive	Resistive	Capacitive
Sine Wave	0.5	1.3	0.5	0.65	1.0	1.3
Square Wave	0.75	1.5	0.75	0.75	1.5	1.5

*Note that $V_{R(PK)} \approx 2\ V_{in(PK)}$

*†Use line to center tap voltage for V_{in}.

FIGURE 1 – MAXIMUM REFERENCE TEMPERATURE – 1N5826

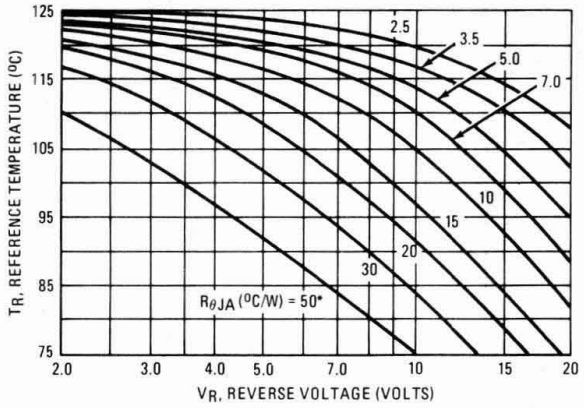

FIGURE 2 – MAXIMUM REFERENCE TEMPERATURE – 1N5827

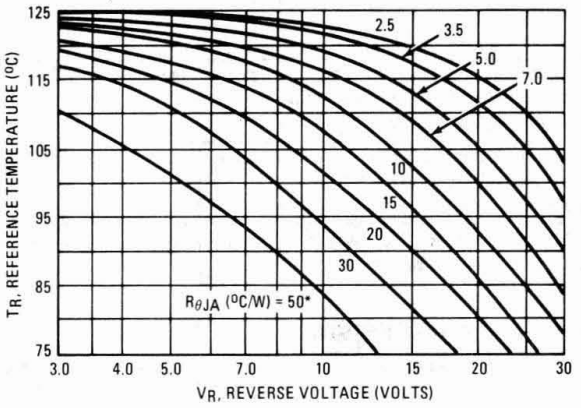

FIGURE 3 – MAXIMUM REFERENCE TEMPERATURE – 1N5828

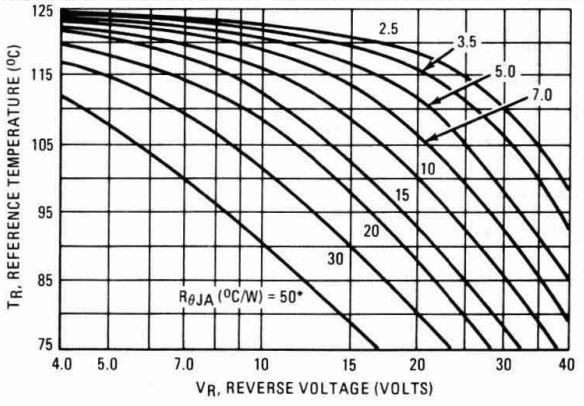

FIGURE 4 – FORWARD POWER DISSIPATION

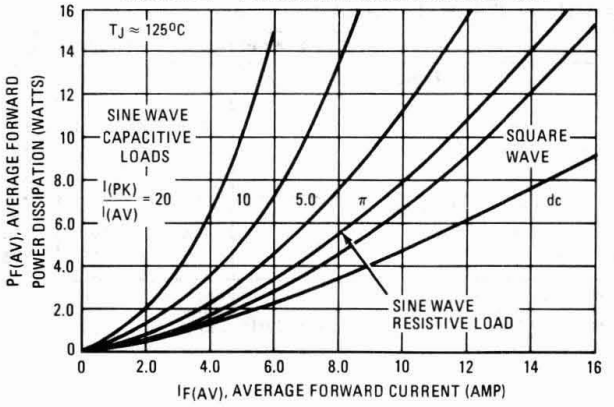

*No external heat sink.

FIGURE 5 – TYPICAL FORWARD VOLTAGE

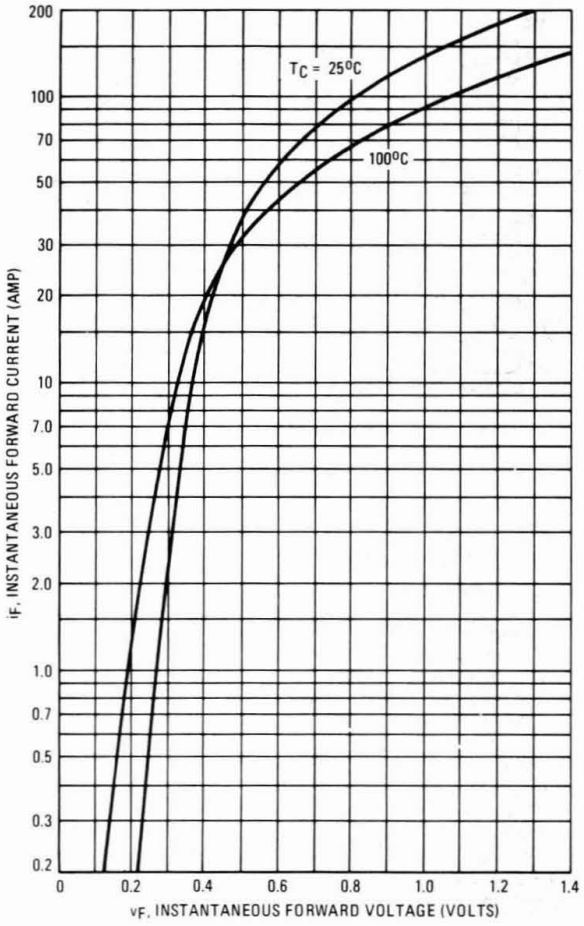

FIGURE 6 – MAXIMUM SURGE CAPABILITY

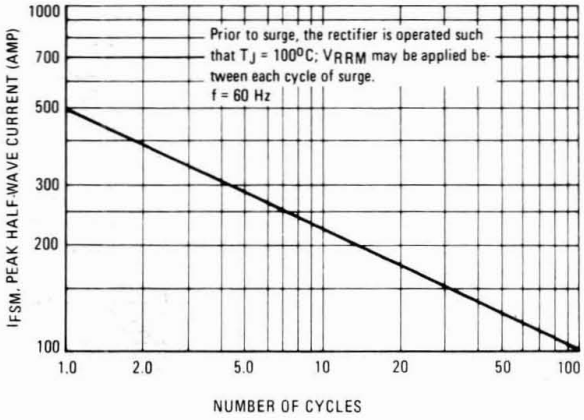

FIGURE 7 – CURRENT DERATING

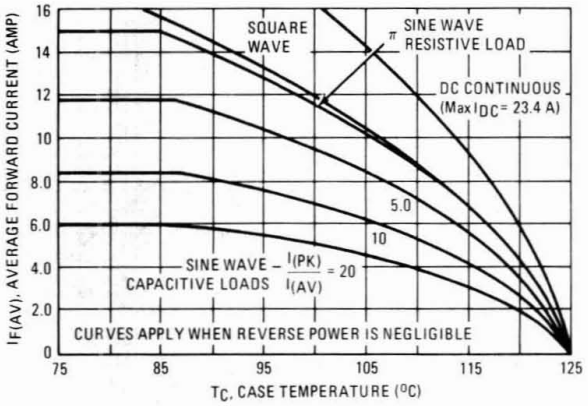

FIGURE 8 – THERMAL RESPONSE

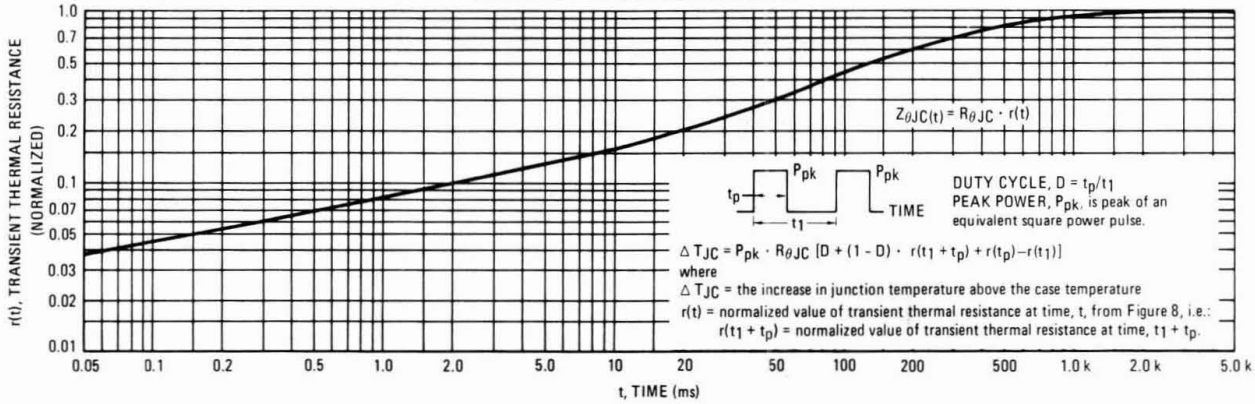

FIGURE 9 – NORMALIZED REVERSE CURRENT

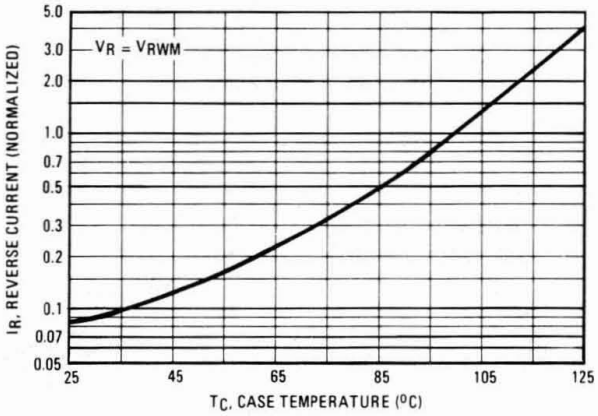

FIGURE 10 – TYPICAL REVERSE CURRENT

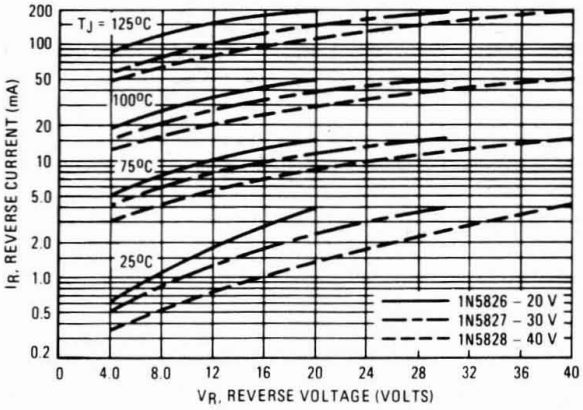

FIGURE 11 – CAPACITANCE

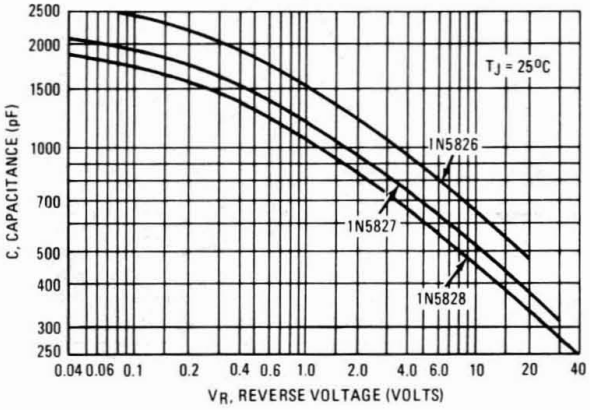

NOTE 2 – HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 11).

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

1N5829
1N5830
1N5831

Designer's Data Sheet

Switchmode Power Rectifiers

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

- Extremely Low v_F
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency
- High Surge Capacity

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 45.6 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 15 lb-in max
- Shipped 25 units per rail
- Marking: 1N5829, 1N5830, 1N5831

1N5831 is a Motorola Preferred Device

25 AMPERE
20, 30, 40 VOLTS

CASE 56-03
DO-203AA
METAL

MAXIMUM RATINGS

Rating	Symbol	*1N5829	*1N5830	*1N5831	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	Volts
Nonrepetitive Peak Reverse Voltage	V_{RSM}	24	36	48	Volts
Average Rectified Forward Current $V_{R(equiv)} \leq 0.2\ V_{R(dc)}$, $T_C = 85°C$	I_O	25			Amps
Ambient Temperature Rated $V_{R(dc)}$, $P_{F(AV)} = 0$, $R_{\theta JA} = 3.5°C/W$	T_A	90	85	80	°C
Nonrepetitive Peak Surge Current (surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	800 (for 1 cycle)			Amps
Operating and Storage Junction Temperature Range (Reverse voltage applied)	T_J, T_{stg}	−65 to +125			°C
Peak Operating Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	150			°C

THERMAL CHARACTERISTICS

Chaeracteristics	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.75	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic		Symbol	*1N5829	*1N5830	*1N5831	Unit
Maximum Instantaneous Forward Voltage(1)	(i_F = 10 Amps) (i_F = 25 Amps) (i_F = 78.5 Amps)	v_F	0.360 0.440 0.720	0.370 0.460 0.770	0.380 0.480 0.820	Volts
Maximum Instantaneous Reverse Current @ Rated dc Voltage(1) (T_C = 100°C)			20 150	20 150	20 150	mA

*Indicates JEDEC Registered Data.
(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2%.
Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely fromthe information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Rev 2

NOTE 1: DETERMINING MAXIMUM RATINGS

Reverse power dissipation and the possibility of thermal runaway must be considered when operating this rectifier at reverse voltages above 0.2 V_{RWM}. Proper derating may be accomplished by use of equation (1):

$$T_{A(max)} = T_{J(max)} - R_{\theta JA} P_{F(AV)} - R_{\theta JA} P_{R(AV)} \quad (1)$$

where

$T_{A(max)}$ = Maximum allowable ambient temperature
$T_{J(max)}$ = Maximum allowable junction temperature (125°C or the temperature at which thermal runaway occurs, whichever is lowest).
$P_{F(AV)}$ = Average forward power dissipation
$P_{R(AV)}$ = Average reverse power dissipation
$R_{\theta JC}$ = Junction-to-ambient thermal resistance

Figures 1, 2 and 3 permit easier use of equation (1) by taking reverse power dissipation and thermal runaway into consideration. The figures solve for a reference temperature as determined by equation (2):

$$T_R = T_{J(max)} - R_{\theta JA} P_{R(AV)} \quad (2)$$

Substituting equation (2) into equation 91) yields:

$$T_{A(max)} = T_R - R_{\theta JA} P_{F(AV)} \quad (3)$$

Inspection of equations (2) and (3) reveals that T_R is the ambient temperature at which thermal runaway occurs or where T_J = 125°C, when forward power is zero. The transition from one boundary condition to the other is evident on the curves of Figures 1, 2 and 3 as a difference in the rate of change of the slope in the vicinity of 115°C.

The data of Figures 1, 2 and 3 is based upon dc conditions. For use in common rectifier circuits, Table 1 indicates suggested factors for an equivalent dc voltage to use for conservative design; i.e.:

$$V_{R(equiv)} = V_{in(PK)} \times F \quad (4)$$

The Factor F is derived by considering the properties of the various rectifier circuits and the reverse characteristics of Schottky diodes.

Example: Find $T_{A(max)}$ for 1N5831 operated in a 12-Volt dc supply using a bridge circuit with capacitive filter such that I_{DC} = 16 A ($I_{F(AV)}$ = 8 A), $I_{(PK)}/I_{(AV)}$ = 20, Input Voltage = 10 V(rms), $R_{\theta JA}$ = 5°C/W.

Step 1: Find $V_{R(equiv)}$. Read F = 0.65 from Table 1
$V_{R(equiv)} = (1.41)(10)(0.65) = 9.18$ V

Step 2: Find T_R from Figure 3. Read T_R = 113°C @ V_R = 9.18 & $R_{\theta JA}$ = 5°C/W

Step 3: Find $P_{F(AV)}$ from Figure 4.** Read $P_{F(AV)}$ = 12.8 W @ $\frac{I_{(PK)}}{I_{(AV)}}$ = 20 & $I_{F(AV)}$ = 8 A

Step 4: Find $T_{A(max)}$ from equation (3). $T_{A(max)}$ = 113-(5) (12.8) = 49°C

**Value given are for the 1N5828. Power is slightly lower for the other units because of their lower forward voltage.

Table 1. Values for Factor F

Circuit Load	Half Wave		Full Wave, Bridge		Full Wave Center Tapped††	
	Resistive	Capacitive†	Resistive	Capacitive	Resistive	Capacitive
Sine Wave	0.5	1.3	0.5	0.65	1	1.3
Square Wave	0.75	1.5	0.75	0.75	1.5	1.5

†Note that $V_{R(PK)} \approx 2\ V_{in(PK)}$

††Use line to center tape voltage for V_{in}.

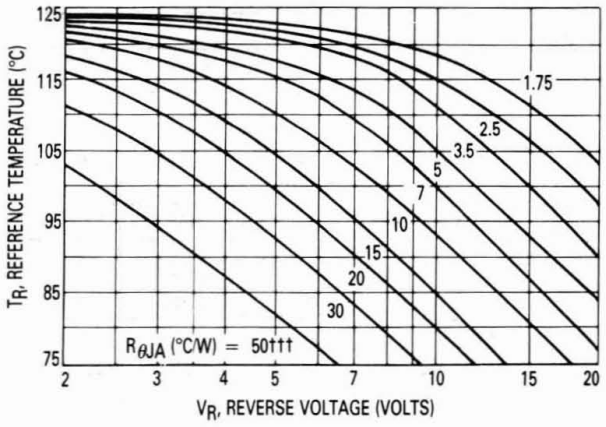

Figure 1. Maximum Reference Temperature — 1N5829

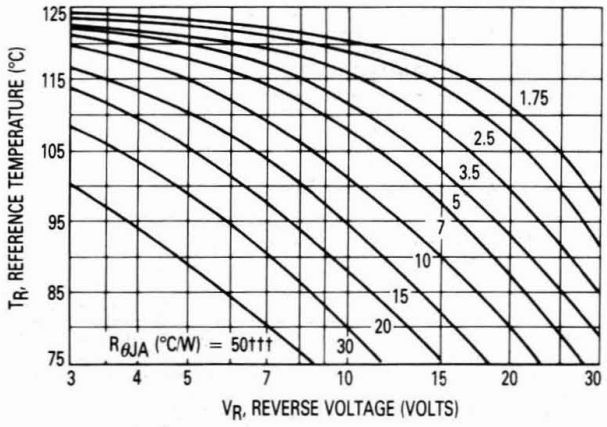

Figure 2. Maximum Reference Temperature — 1N5830

†††NO EXTERNAL HEAT SINK

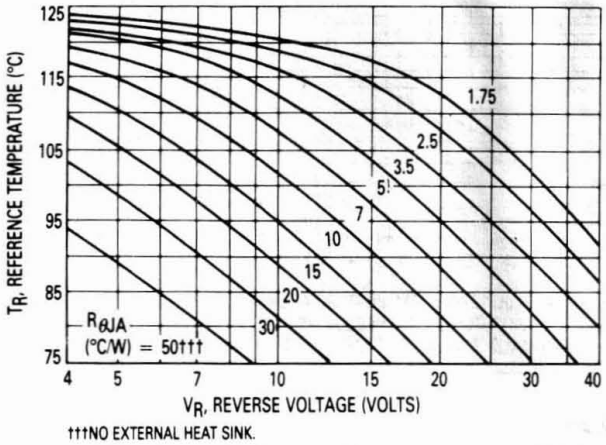

†††NO EXTERNAL HEAT SINK.

Figure 3. Maximum Reference Temperature — 1N5831

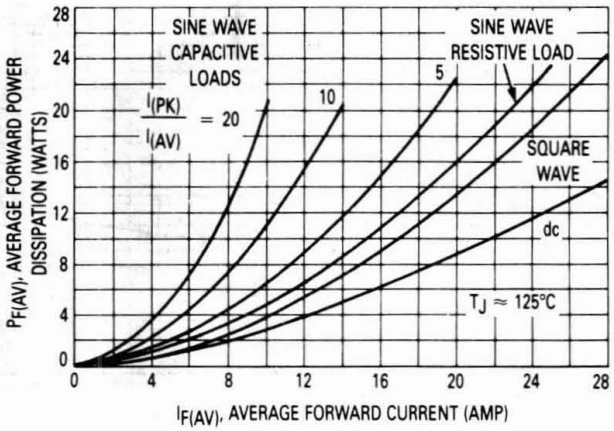

Figure 4. Forward Power Dissipation

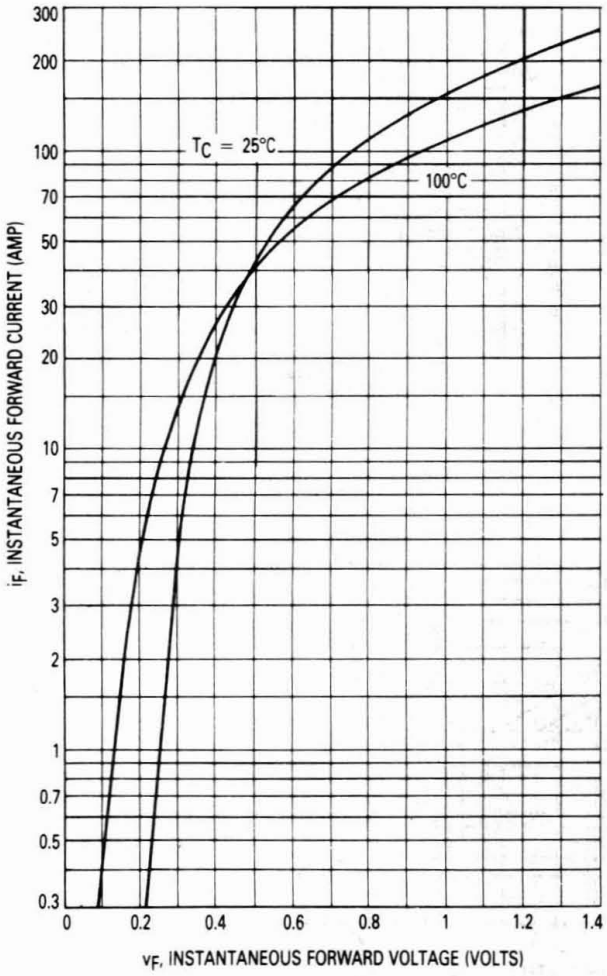

Figure 5. Typical Forward Voltage

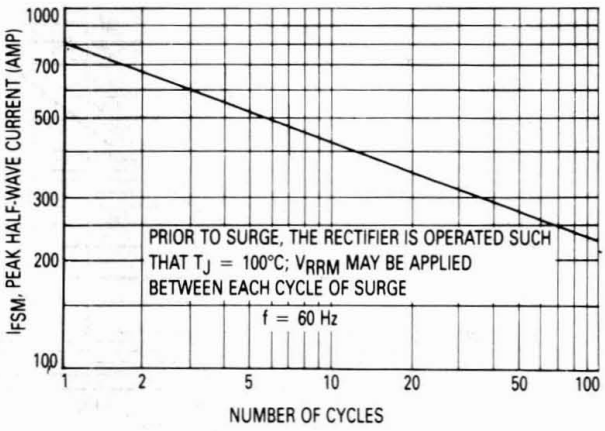

Figure 6. Maximum Surge Capability

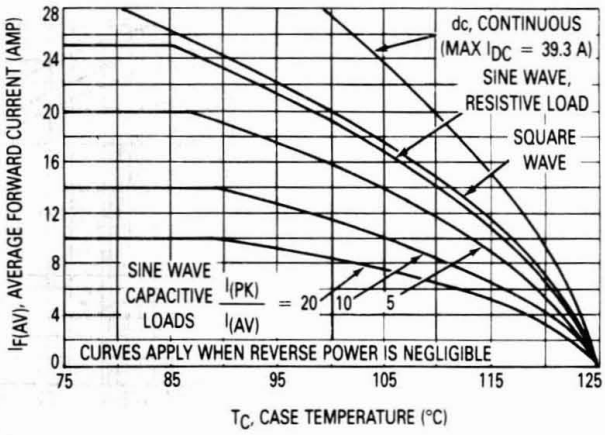

Figure 7. Current Derating

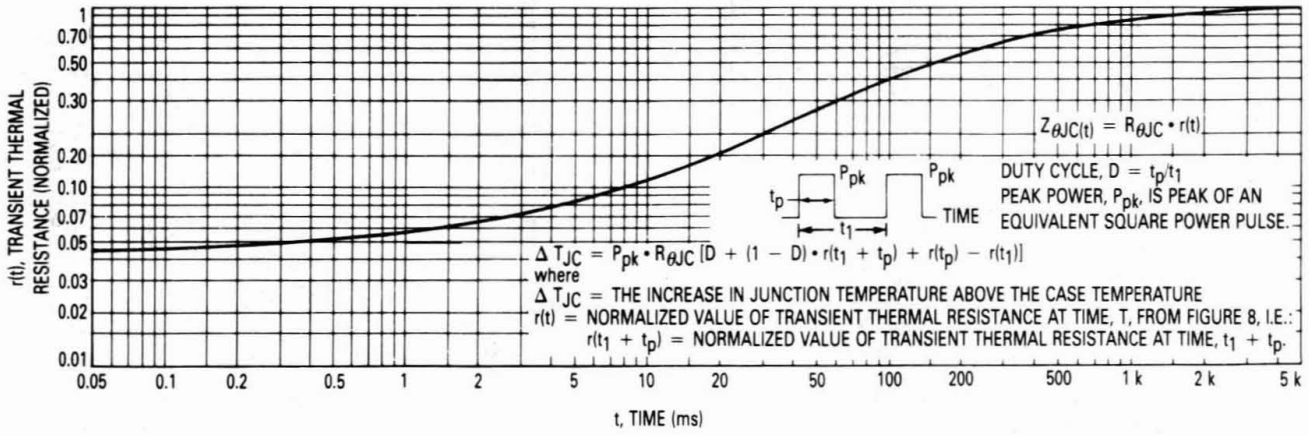

Figure 8. Thermal Response

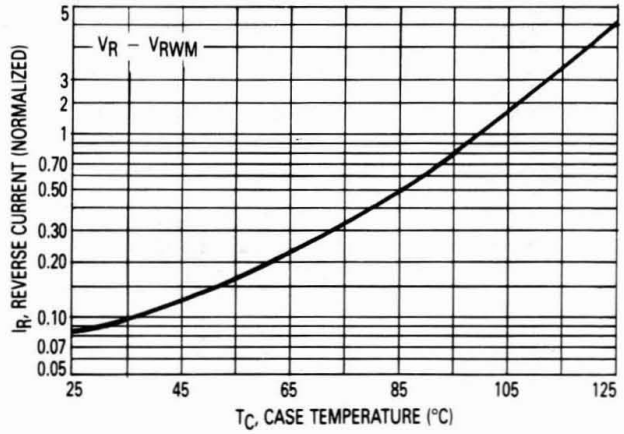

Figure 9. Normalized Reverse Current

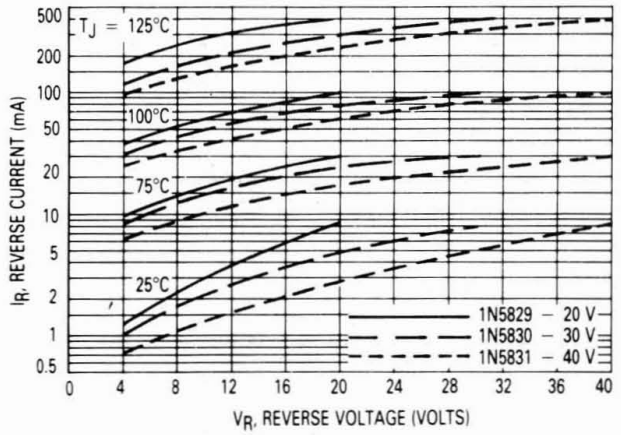

Figure 10. Typical Reverse Current

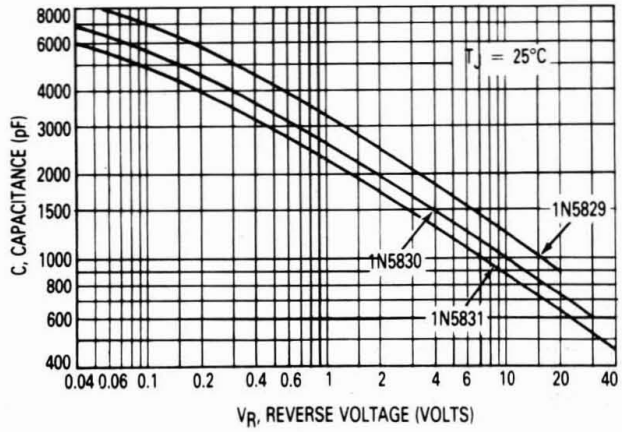

Figure 11. Capacitance

NOTE 2 — HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 11.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 percent at 2 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicate of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

1N6095
1N6096
SD41

1N6096 and SD41 are
Motorola Preferred Devices

Switchmode Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature Capability
- Guaranteed Reverse Avalanche
- Mounting Torque: 15 in-lb max

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 45.6 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 15 lb-in max
- Shipped 25 units per rail
- Marking: 1N6095, 1N6096, SD41

SCHOTTKY BARRIER RECTIFIERS

25 and 30 AMPERES
30 to 45 VOLTS

CASE 56-03
DO-203AA
METAL

3

MAXIMUM RATINGS

Rating	Symbol	1N6095*	1N6096*	SD41	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30	40	45 35 45	Volts
Average Rectified Forward Current (Rated V_R)	I_O	25 T_C = 70°C	25 T_C = 70°C	30 T_C = 105°C	Amps
Case Temperature (Rated V_R)	T_C	105	105	—	°C
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	400	400	600	Amp
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz) See Figure 10. (1)	I_{RRM}	2.0	2.0	2.0	Amps
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to + 125	-65 to + 125	-55 to + 150°C	°C
Peak Operating Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	150	150	150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	10000	10000	V/μs

THERMAL CHARACTERISTICS

Characteristic	Symbol	1N6095*	1N6096*	SD41	Unit
Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	← 2.0 →			°C/W

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	1N6095*	1N6096*	SD41	Unit
Maximum Instantaneous Forward Voltage (2) (i_F = 30 Amp, T_C = 125°C) (i_F = 78.5 Amp, T_C = 70°C)	v_F	— 0.86	— 0.86	0.55 —	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = 125°C)	i_R	250	250	125 @ V_R = 35 V	mA
Capacitance (100 kHz ≥ f ≥ 1.0 MHz)	C_t	6000 V_R = 1.0 V	6000 V_R = 1.0 V	2000 V_R = 5.0 V	pF

*Indicates JEDEC Registered Data.
(1) Not JEDEC requirement, but a Motorola product capability.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 1

FIGURE 1 — TYPICAL FORWARD VOLTAGE

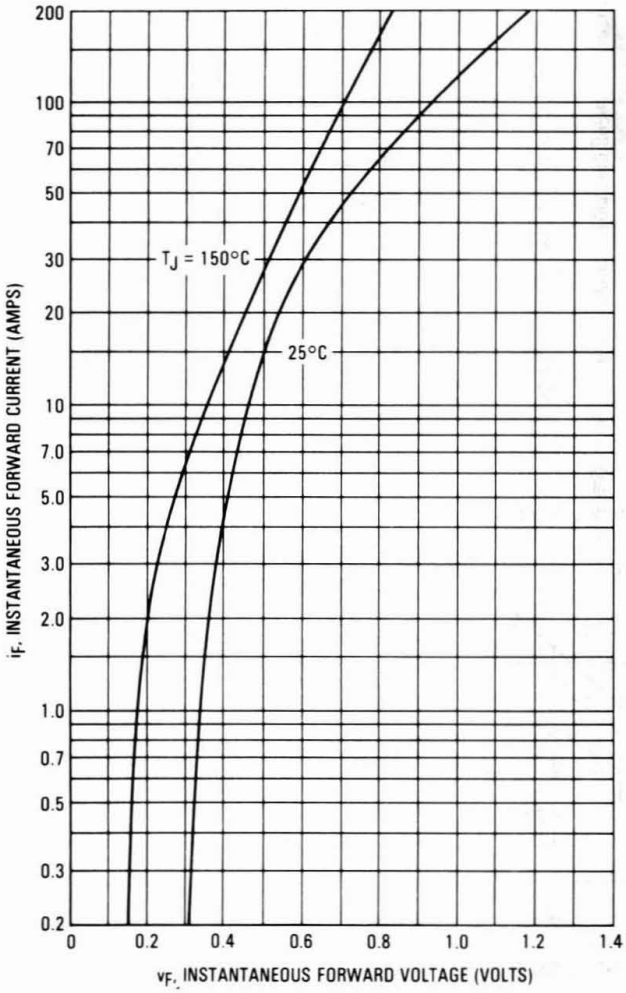

FIGURE 2 — TYPICAL REVERSE CURRENT

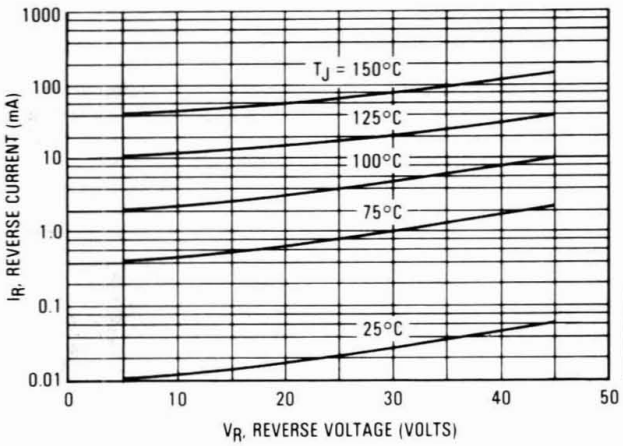

3

FIGURE 3 — MAXIMUM SURGE CAPABILITY

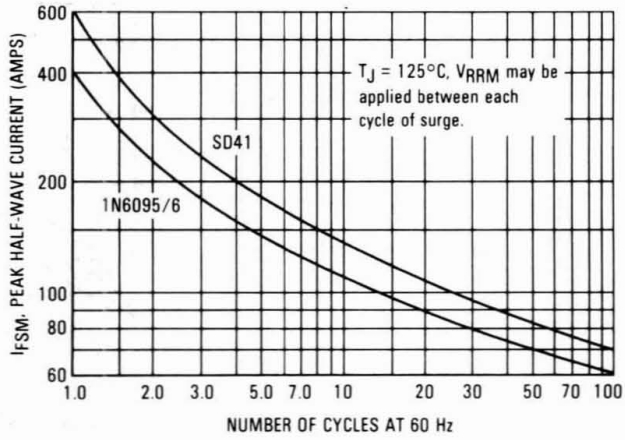

HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 4.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficieny is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

FIGURE 4 — CAPACITANCE

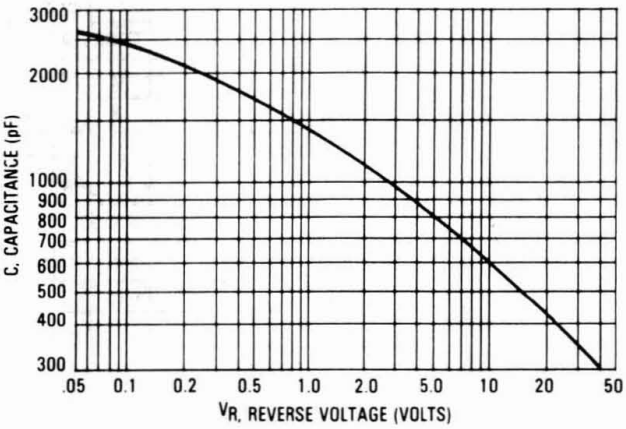

FIGURE 5 — SD41 CURRENT DERATING

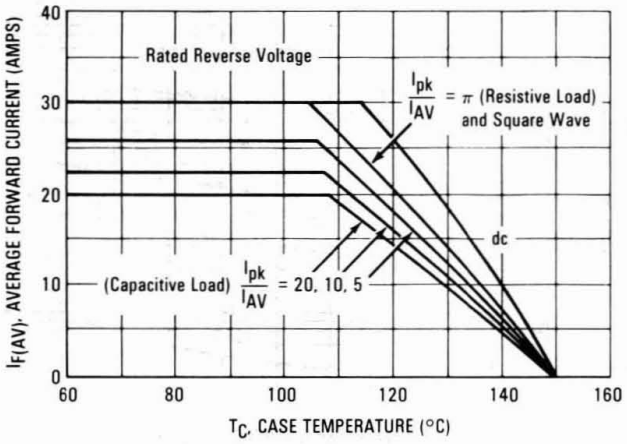

FIGURE 6 — 1N6095/6 CURRENT DERATING

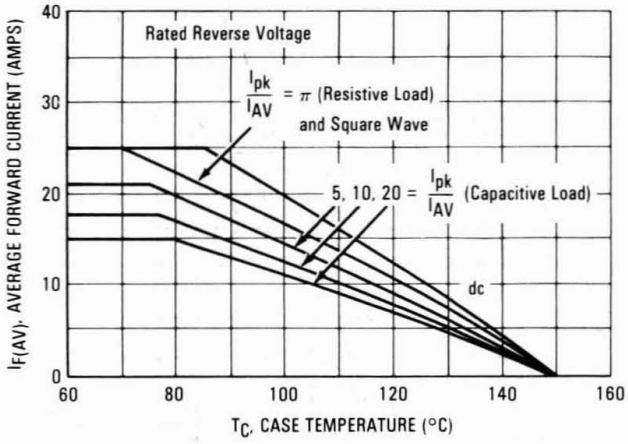

FIGURE 7 — FORWARD POWER DISSIPATION

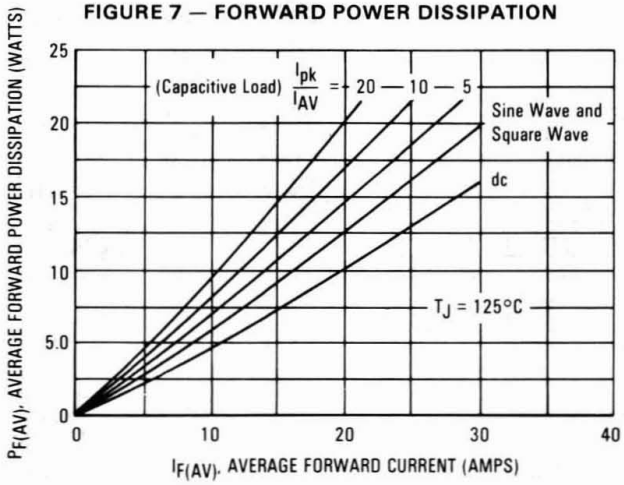

FIGURE 8 — THERMAL RESPONSE

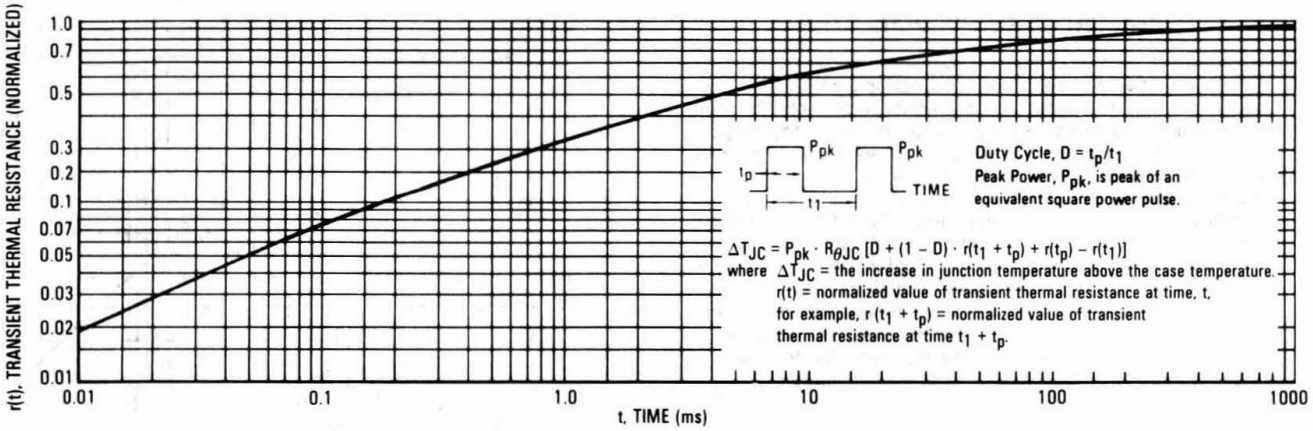

FIGURE 9 — SCHOTTKY RECTIFIER

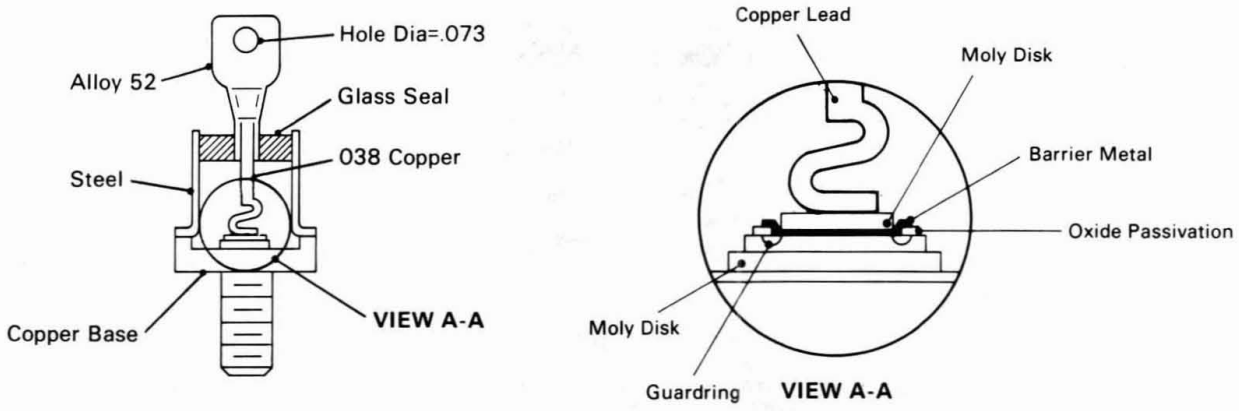

Motorola builds quality and reliability into its Schottky Rectifiers.

First is the chip, which has an interface metal between the platinum-barrier metal and nickel-gold ohmic-contact metal to eliminate any possible interaction with the barrier. The indicated guardring prevents dv/dt problems, so snubbers are not required. The guardring also operates like a zener to absorb over-voltage transients.

Second is the package. There are molybdenum disks which closely match the thermal coefficient of expansion of silicon on each side of the chip. The top copper lead is also stress relieved.These two features give the unit the capability of passing stringent thermal fatigue tests for 5,000 cycles. The top copper lead provides a low resistance to current and therefore does not contribute to device heating; a heat sink should be used when attaching wires.

Third is the redundant electrical testing. The device is tested before assembly in "sandwich" form, with the chip between the moly disks. It is tested again after assembly. As part of the final electrical test, devices are 100% tested for dv/dt at 1,600 V/μs and reverse avalanche.

FIGURE 10 — TEST CIRCUIT FOR dv/dt AND REVERSE SURGE CURRENT

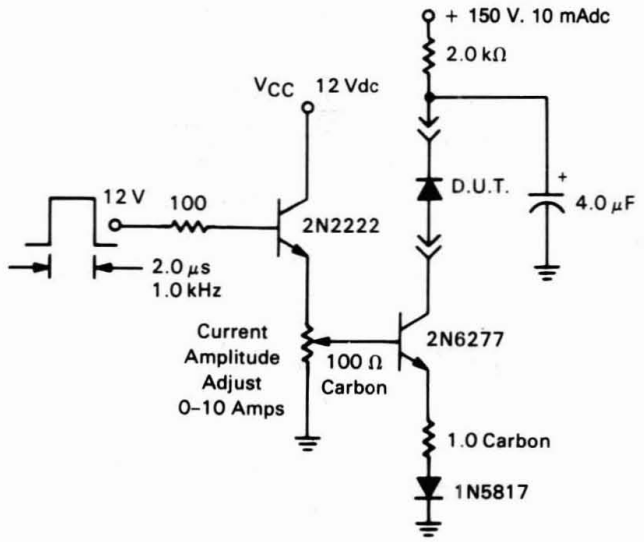

MBR3520
MBR3535
MBR3545

MBR3545 is a Motorola Preferred Device

Switchmode Power Rectifiers

. . . using a platinum barrier metal in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free-wheeling diodes, and polarity-protection diodes.

- Guardring for dv/dt Stress Protection
- Guaranteed Reverse Surge Current/Avalanche
- 150°C Operating Junction Temperature
- Mounting Torque: 15 in-lb max

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 45.6 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 15 lb-in max
- Shipped 25 units per rail
- Marking: B3520, B3535, B3545

SCHOTTKY BARRIER RECTIFIERS

35 AMPERES
20 to 45 VOLTS

CASE 56-03
DO-203AA
METAL

MAXIMUM RATINGS

Rating	Symbol	MBR3520	MBR3535	MBR3545	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	35	45	Volts
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz, T_C = 110°C)	I_{FRM}	70			Amps
Average Rectified Forward Current (Rated V_R, T_C = 110°C)	$I_{F(AV)}$	35			Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz) See Figure 8	I_{RRM}	2.0			Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	600			Amps
Operating Junction Temperature	T_J	-65 to + 150			°C
Storage Temperature	T_{stg}	-65 to +175			°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000			V/μs

THERMAL CHARACTERISTICS

Characteristic	Symbol	Typ	Max	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.3	1.5	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Characteristic	Symbol	Typ	Max	Unit
Instantaneous Forward Voltage (1) (i_F = 35 Amp, T_C = 125°C) (i_F = 35 Amp, T_C = 25°C) (i_F = 70 Amp, T_C = 125°C)	v_F	 0.49 0.55 0.60	 0.55 0.63 0.69	Volts
Instantaneous Reverse Current (1) (Rated Voltage, T_C = 125°C) (Rated Voltage, T_C = 25°C)	i_R	 60 0.1	 100 0.3	mA
Capacitance (V_R = 1.0 Vdc, 100 kHz > f > 1.0 MHz, T_C = 25°C)	C_t	3000	3700	pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%

Rev 2

FIGURE 1 —MAXIMUM FORWARD VOLTAGE

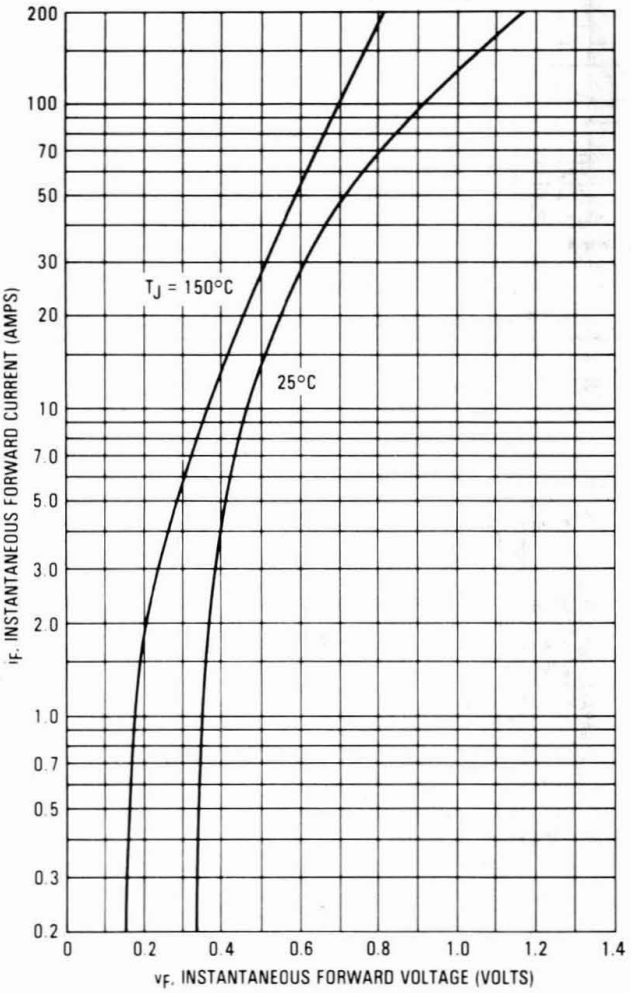

FIGURE 2 — MAXIMUM REVERSE CURRENT

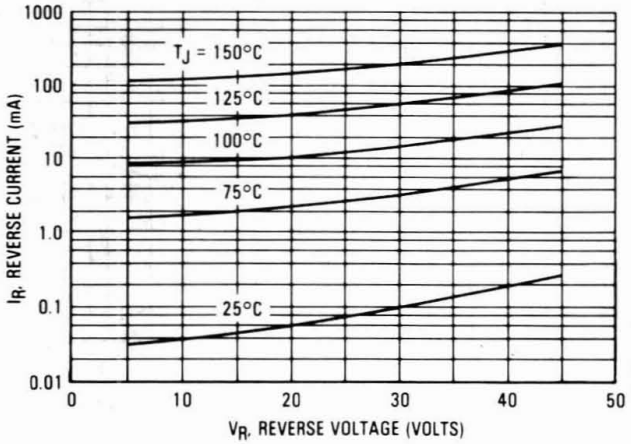

3

FIGURE 3 — MAXIMUM SURGE CAPABILITY

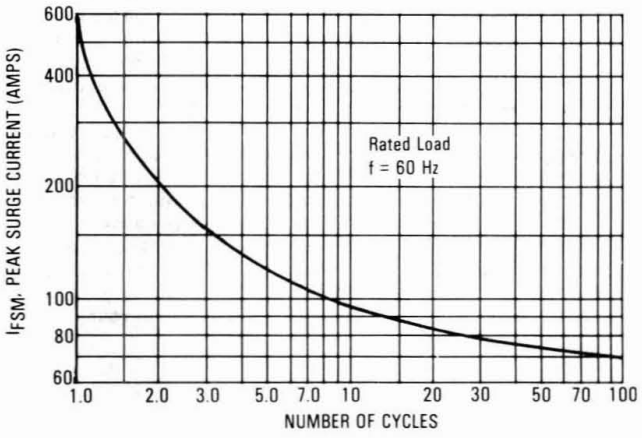

FIGURE 4 — CURRENT DERATING

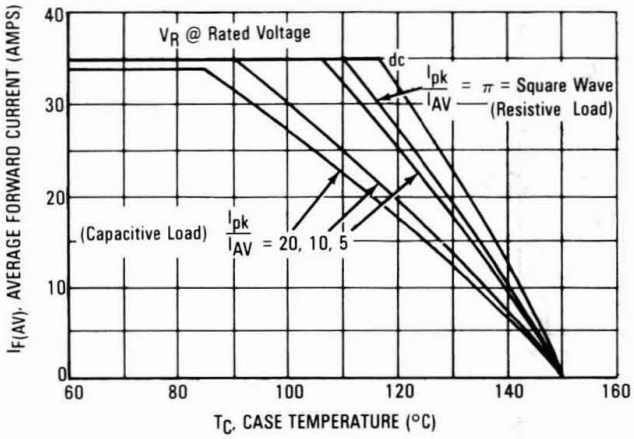

FIGURE 5 — POWER DISSIPATION

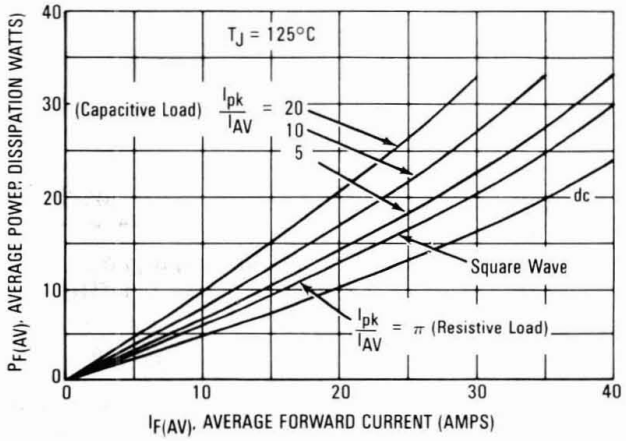

FIGURE 6 — THERMAL RESPONSE

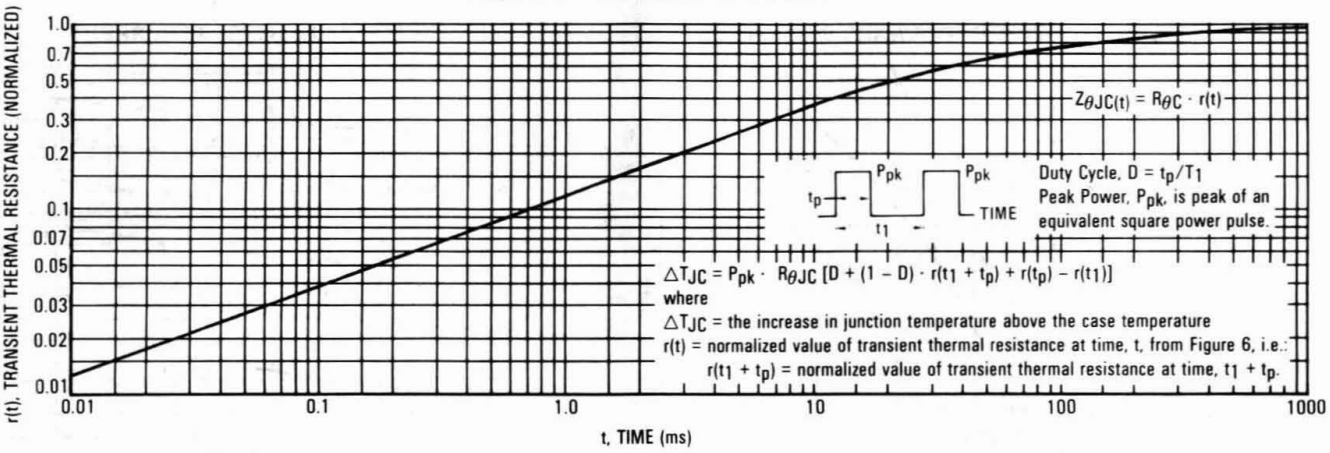

3

HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 7.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

FIGURE 7 — CAPACITANCE

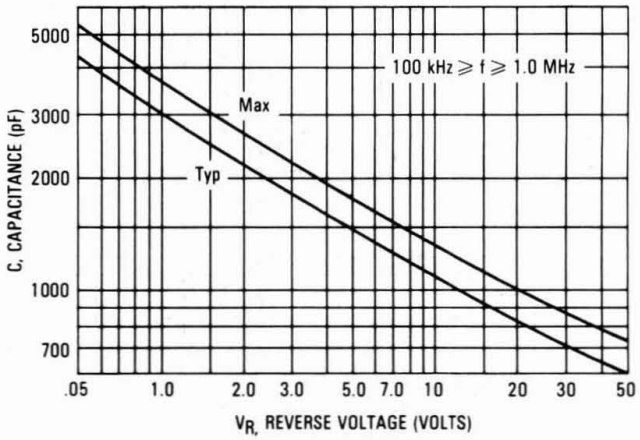

FIGURE 8 — TEST CIRCUIT FOR dv/dt AND REVERSE SURGE CURRENT

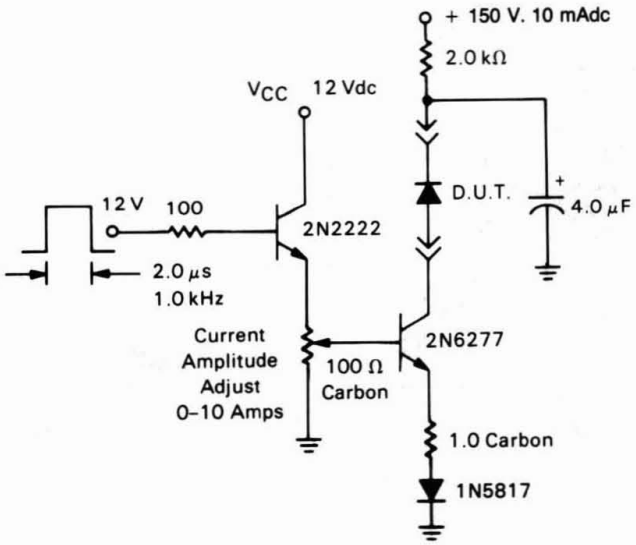

FIGURE 9 — SCHOTTKY RECTIFIER

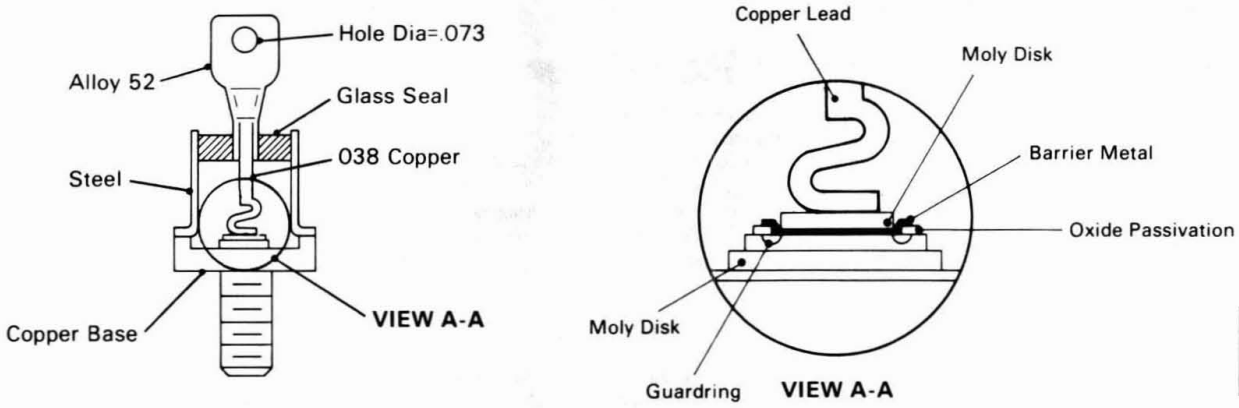

Motorola builds quality and reliability into its Schottky Rectifiers.

First is the chip, which has an interface metal between the platinum-barrier metal and nickel-gold ohmic-contact metal to eliminate any possible interaction with the barrier. The indicated guardring prevents dv/dt problems, so snubbers are not mandatory. The guardring also operates like a zener to absorb overvoltage transients.

Second is the package. There are molybdenum disks which closely match the thermal coefficient of expansion of silicon on each side of the chip. The top copper lead is also stress-reliefed to prevent damage during assembly. These two features give the unit the capability of passing powered thermal fatigue tests for 5,000 cycles. The top copper lead provides a low resistance to current and therefore does not contribute to device heating; a heat sink should be used when attaching wires.

Third is the redundant electrical testing. The device is tested before assembly in "sandwich" form, with the chip between the moly disks. It is tested again after assembly. As part of the final electrical test, devices are 100% tested for dv/dt at 1,600 V/μs and reverse avalanche. Devices are also 100% reverse scope tested for trace anomalies.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

1N5832
1N5833
1N5834

1N5832 and 1N5834 are
Motorola Preferred Devices

Designer's Data Sheet

Switchmode Power Rectifier

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features chrome barrier metal, epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free wheeling diodes, and polarity protection diodes.

- Extremely Low v_F
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/High Efficiency
- High Surge Capacity

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 17 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 25 lb-in max
- Shipped 25 units per rail
- Marking: 1N5832, 1N5833, 1N5834

SCHOTTKY
BARRIER
RECTIFIERS

40 AMPERE
20,30,40 VOLTS

CASE 257-01
DO-203AB
METAL

3

*MAXIMUM RATINGS

Rating	Symbol	1N5832	1N5833	1N5834	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	30	40	Volts
Non-Repetitive Peak Reverse Voltage	V_{RSM}	24	36	48	Volts
Average Rectified Forward Current $V_{R(equiv)} \leq 0.2\ V_{R(dc)}, T_C = 75^oC$	I_O	← 40 →			Amp
Ambient Temperature Rated $V_{R(dc)}$, $P_{F(AV)} = 0$, $R_{\theta JA} = 2.0^oC/W$	T_A	100	95	90	^oC
Non-Repetitive Peak Surge Current (surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	← 800 (for 1 cycle) →			Amp
Operating and Storage Junction Temperature Range (Reverse voltage applied)	T_J, T_{stg}	← -65 to +125 →			^oC
Peak Operating Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	← 150 →			^oC

*THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	$^oC/W$

*ELECTRICAL CHARACTERISTICS ($T_C = 25^oC$ unless otherwise noted.)

Characteristic	Symbol	1N5832	1N5833	1N5834	Unit
Maximum Instantaneous Forward Voltage (1) (i_F = 10 Amp) (i_F = 40 Amp) (i_F = 125 Amp)	v_F	 0.360 0.520 0.980	 0.370 0.550 1.080	 0.380 0.590 1.180	Volts
Maximum Instantaneous Reverse Current @ rated dc Voltage (1) $T_C = 100^oC$	i_R	 20 150	 20 150	 20 150	mA

*Indicates JEDEC Registered Data.

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%.

Rev 2

NOTE 1: DETERMINING MAXIMUM RATINGS

Reverse power dissipation and the possibility of thermal runaway must be considered when operating this rectifier at reverse voltages above 0.2 V_{RWM}. Proper derating may be accomplished by use of equation (1):

$$T_{A(max)} = T_{J(max)} - R_{\theta JA} P_{F(AV)} - R_{\theta JA} P_{R(AV)} \quad (1)$$

where

$T_{A(max)}$ = Maximum allowable ambient temperature

$T_{J(max)}$ = Maximum allowable junction temperature (125°C or the temperature at which thermal runaway occurs, whichever is lowest).

$P_{F(AV)}$ = Average forward power dissipation

$P_{R(AV)}$ = Average reverse power dissipation

$R_{\theta JC}$ = Junction-to-ambient thermal resistance

Figures 1, 2 and 3 permit easier use of equation (1) by taking reverse power dissipation and thermal runaway into consideration. The figures solve for a reference temperature as determined by equation (2):

$$T_R = T_{J(max)} - R_{\theta JA} P_{R(AV)} \quad (2)$$

Substituting equation (2) into equation (1) yields:

$$T_{A(max)} = T_R - R_{\theta JA} P_{F(AV)} \quad (3)$$

Inspection of equations (2) and (3) reveals that T_R is the ambient temperature at which thermal runaway occurs or where T_J = 125°C, when forward power is zero. The transition from one boundary condition to the other is evident on the curves of Figures 1, 2 and 3 as a difference in the rate of change of the slope in the vicinity of 115°C. The data of Figures 1, 2 and 3 is based upon dc conditions. For use in common rectifier circuits, Table I indicates suggested factors for an equivalent dc voltage to use for conservative design; i.e.:

$$V_{R(equiv)} = V_{in(PK)} \times F \quad (4)$$

The Factor F is derived by considering the properties of the various rectifier circuits and the reverse characteristics of Schottky diodes.

Example: Find $T_{A(max)}$ for 1N5834 operated in a 12-Volt dc supply using a bridge circuit with capacitive filter such that I_{DC} = 30 A ($I_{F(AV)}$ = 15 A), $I_{(PK)}/I_{(AV)}$ = 10, Input Voltage = 10 V(rms), $R_{\theta JA}$ = 3°C/W.

Step 1: Find $V_{R(equiv)}$. Read F = 0.65 from Table I ∴
$V_{R(equiv)} = (10)(1.41)(0.65) = 9.18$ V

Step 2: Find T_R from Figure 3. Read T_R = 118°C @ V_R = 9.18 V & $R_{\theta JA}$ = 3°C/W

Step 3: Find $P_{F(AV)}$ from Figure 4.†Read $P_{F(AV)}$ = 20 W @ $\frac{I_{(PK)}}{I_{(AV)}}$ = 10 & $I_{F(AV)}$ = 15 A

Step 4: Find $T_{A(max)}$ from equation (3). $T_{A(max)}$ = 118-(3)(20) = 58°C

†Values given are for the 1N5834. Power is slightly lower for the other units because of their lower forward voltage.

3

TABLE I – VALUES FOR FACTOR F

Circuit	Half Wave		Full Wave, Bridge		Full Wave, Center Tapped (1),(2)	
Load	Resistive	Capacitive (1)	Resistive	Capacitive	Resistive	Capacitive
Sine Wave	0.5	1.3	0.5	0.65	1.0	1.3
Square Wave	0.75	1.5	0.75	0.75	1.5	1.5

(1) Note that $V_{R(PK)} \approx 2\ V_{in(PK)}$

(2) Use line to center tap voltage for V_{in}.

FIGURE 1 – MAXIMUM REFERENCE TEMPERATURE – 1N5832

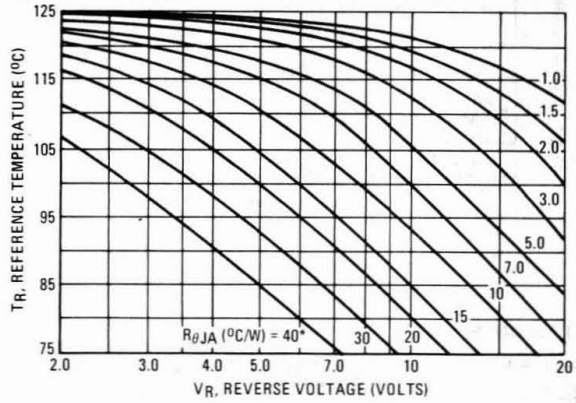

FIGURE 2 – MAXIMUM REFERENCE TEMPERATURE – 1N5833

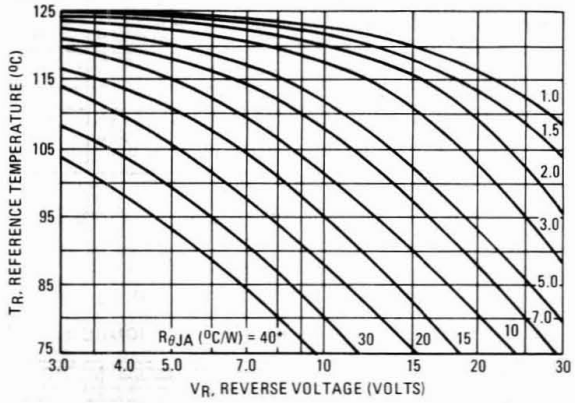

FIGURE 3 – MAXIMUM REFERENCE TEMPERATURE – 1N5834

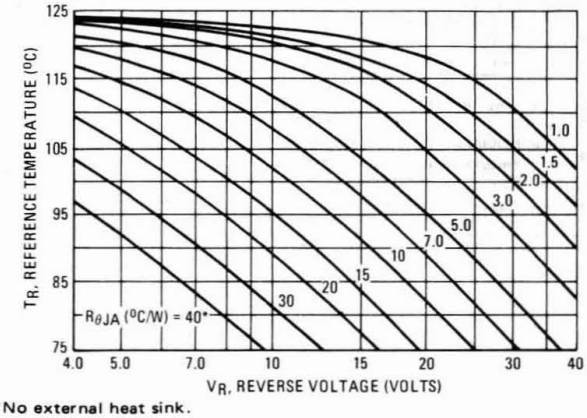

*No external heat sink.

FIGURE 4 – FORWARD POWER DISSIPATION

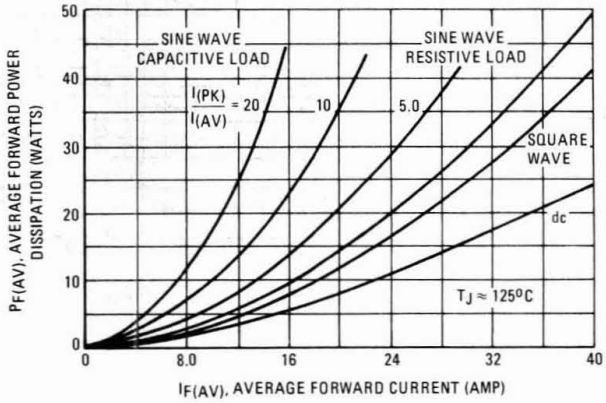

3

FIGURE 5 – TYPICAL FORWARD VOLTAGE

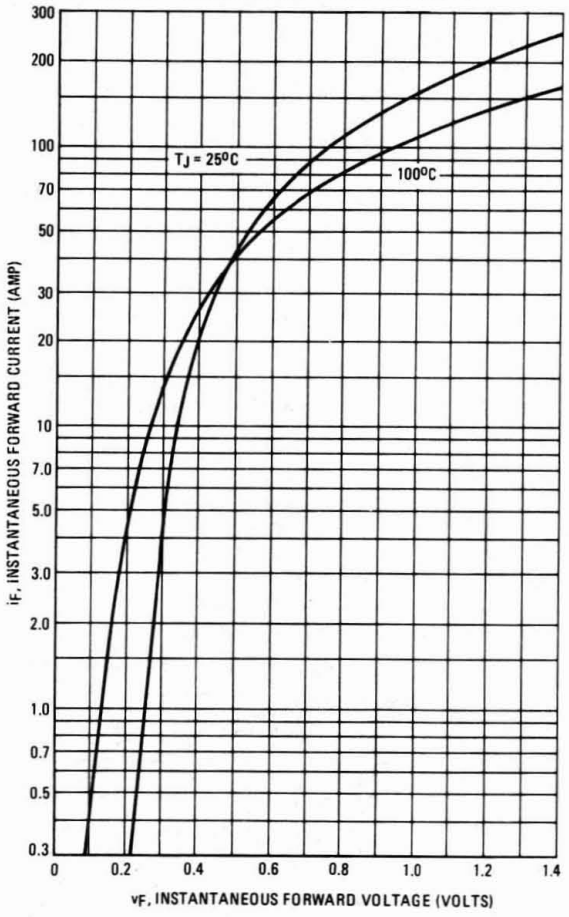

FIGURE 6 – MAXIMUM SURGE CAPABILITY

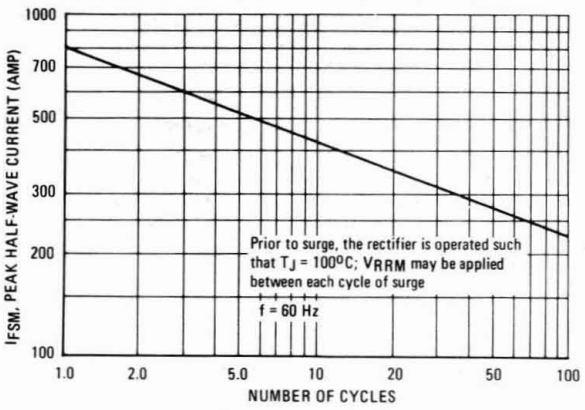

FIGURE 7 – CURRENT DERATING

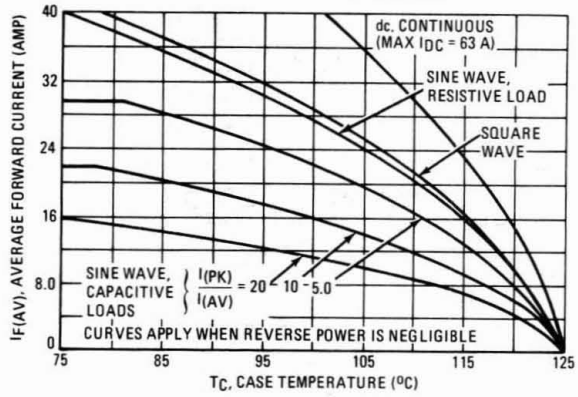

FIGURE 8 – THERMAL RESPONSE

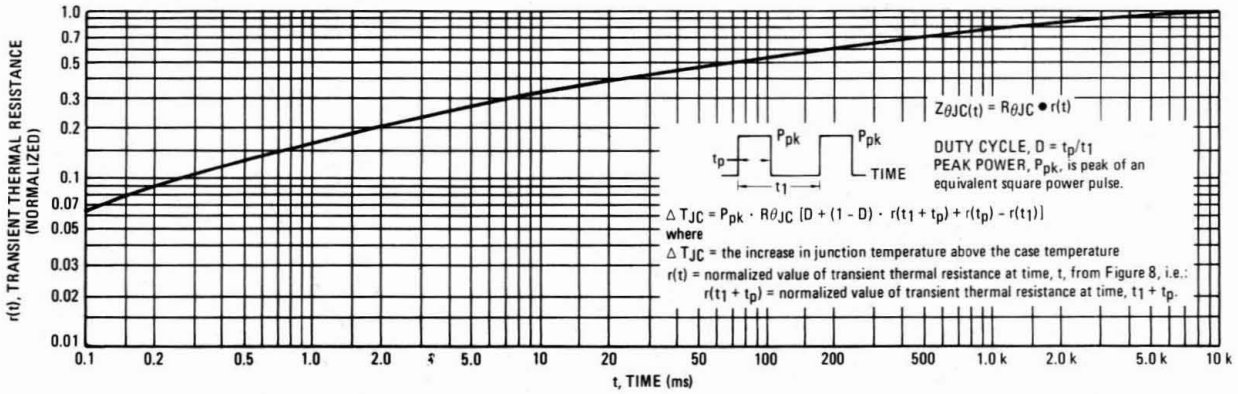

FIGURE 9 – NORMALIZED REVERSE CURRENT

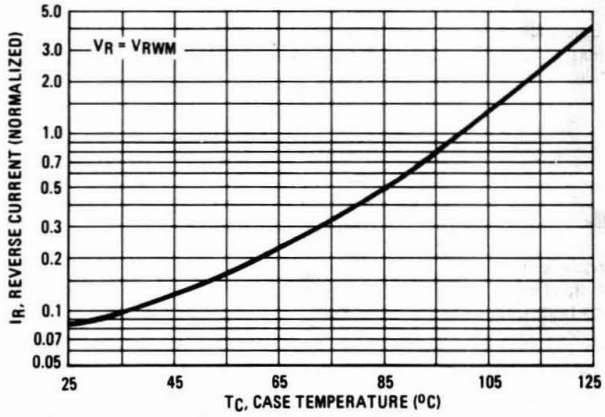

FIGURE 10 – TYPICAL REVERSE CURRENT

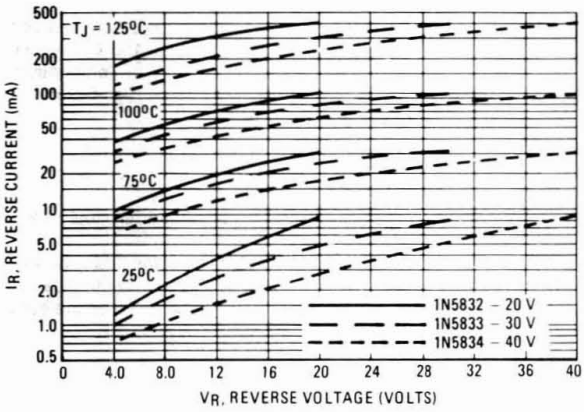

FIGURE 11 – CAPACITANCE

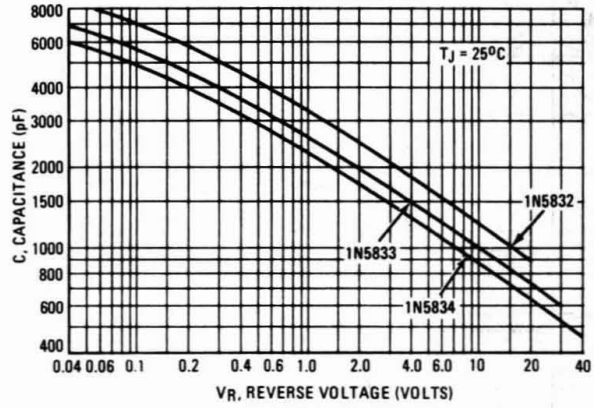

NOTE 2: HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 11).

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

NOTE 3: SOLDER HEAT

The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

Switchmode Power Rectifiers

1N6097
1N6098
SD51

1N6098 and SD51 are
Motorola Preferred Devices

. . . using the platinum barrier metal in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free-wheeling diodes, and polarity-protection diodes.

- Guaranteed Reverse Avalanche
- Extremely Low v_F
- Low Stored Charge, Majority Carrier Conduction
- Guardring for Stress Protection
- Low Power Loss/High Efficiency
- 150°C Operating Junction Temperature Capability
- High Surge Capacity

SCHOTTKY BARRIER RECTIFIERS

60 AMPERES
20 to 45 VOLTS

CASE 257-01
DO-203AB
METAL

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 17 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 25 lb-in max
- Shipped 25 units per rail
- Marking: 1N6097, 1N6098, SD51

3

MAXIMUM RATINGS

Rating	Symbol	1N6097*	1N6098*	SD51	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30	40	45 35 45	Volts
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz)	I_{FRM}	—	—	120 T_C = 90°C	Amps
Average Rectified Forward Current (Rated V_R)	I_O	50 T_C = 70°C	50 T_C = 70°C	—	Amps
Case Temperature (Rated V_R)	T_C	115	115	—	°C
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	← 800 →			Amps
Peak Repetitive Reverse Surge Current (2) (2.0 μs, 1.0 kHz) See Figure 10.	I_{RRM}	← 2.0 →			Amps
Operating Junction Temperature Range (Reverse Voltage Applied)	T_J	-65 to +125	-65 to +125	-65 to +150	°C
Storage Temperature Range	T_{stg}	-65 to +125	-65 to +125	-65 to +165	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	10000	10000	V/μs

THERMAL CHARACTERISTICS

Characteristic	Symbol	1N6097*	1N6098*	SD51	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	← 1.0 →			°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	1N6097*	1N6098*	SD51	Unit
Maximum Instantaneous Forward Voltage (2) (i_F = 157 Amp, T_C = 70°C) (i_F = 60 Amp) (i_F = 60 Amp, T_C = 125°C) (i_F = 120 Amp, T_C = 125°C)	v_F	 0.86 — — —	 0.86 — — —	 — 0.70 0.60 0.84	Volts
Maximum Instantaneous Reverse Current (2) (Rated Voltage, T_C = 125°C) (Rated Voltage, T_C = 25°C)	i_R	 250 —	 250 —	200 50 @ V_R = 35 V	mA
DC Reverse Current (Rated Voltage, T_C = 115°C)	I_R	250	250	—	mA
Maximum Capacitance (100 kHz ≤ f ≤ 1.0 MHz)	C_t	7000 V_R = 1.0 Vdc	7000 V_R = 1.0 Vdc	4000 V_R = 5.0 Vdc	pF

*Indicates JEDEC Registered Data.
(1) Not a JEDEC requirement, but of Motorola product capability.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%.

Rev 1

FIGURE 1 — TYPICAL FORWARD VOLTAGE

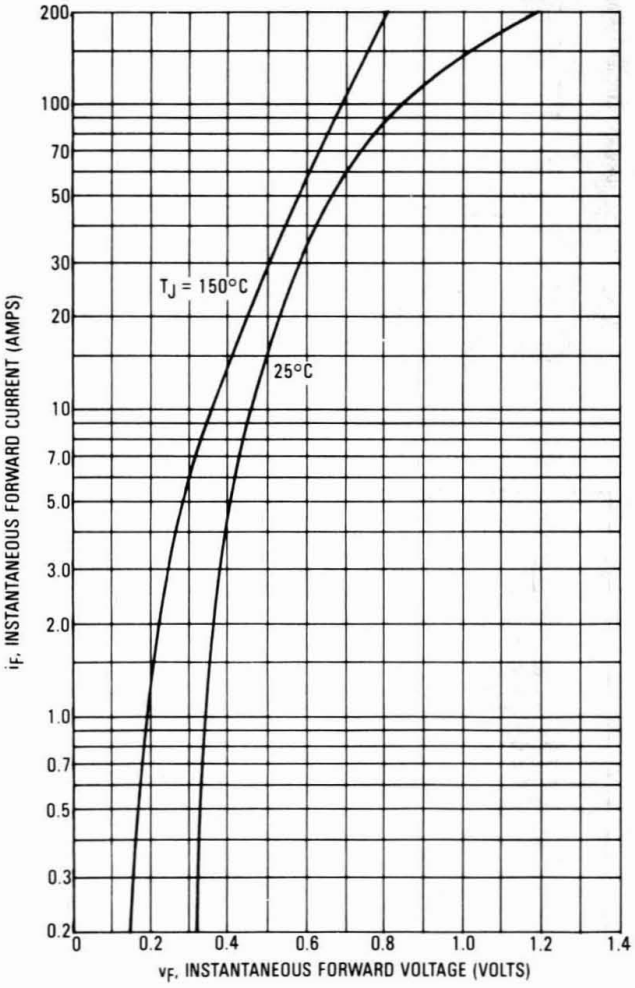

FIGURE 2 — TYPICAL REVERSE CURRENT

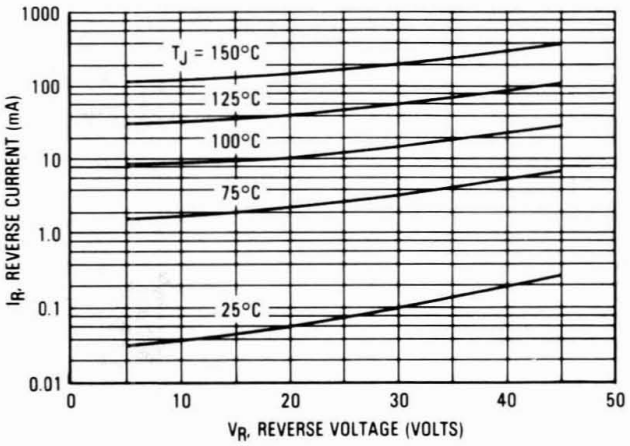

3

FIGURE 3 — TYPICAL SURGE CAPABILITY

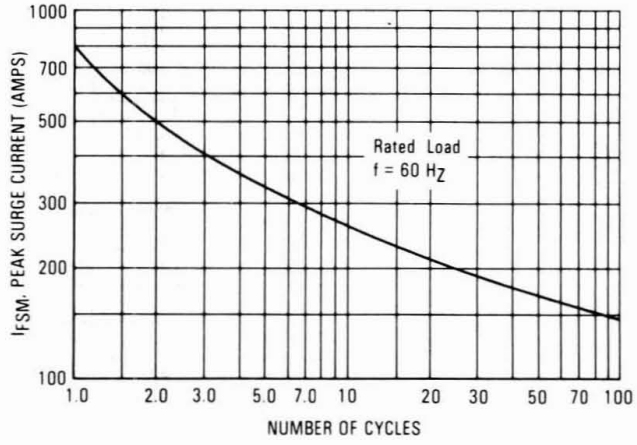

NOTE 1
HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 4.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

FIGURE 4 — CAPACITANCE

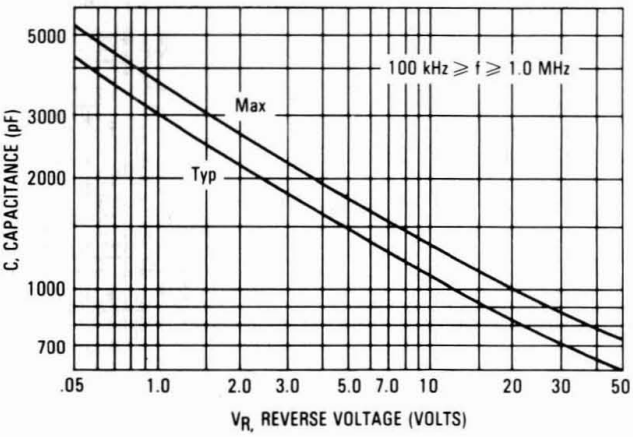

FIGURE 5 — CURRENT DERATING (SD51)

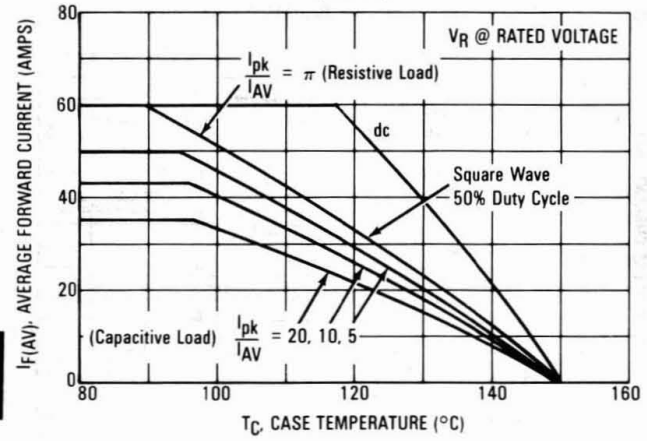

FIGURE 6 — CURRENT DERATING (1N6097/1N6098)

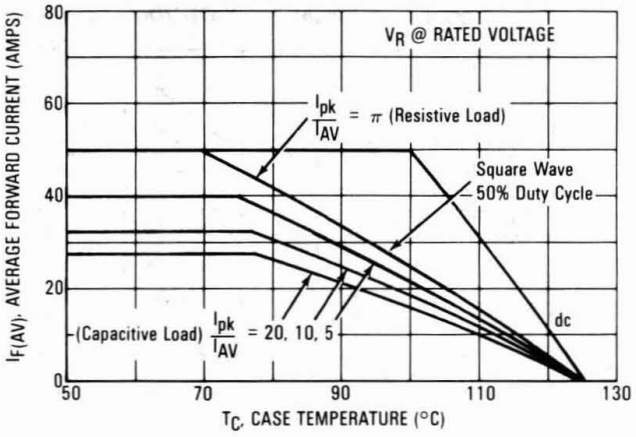

FIGURE 7 — POWER DISSIPATION

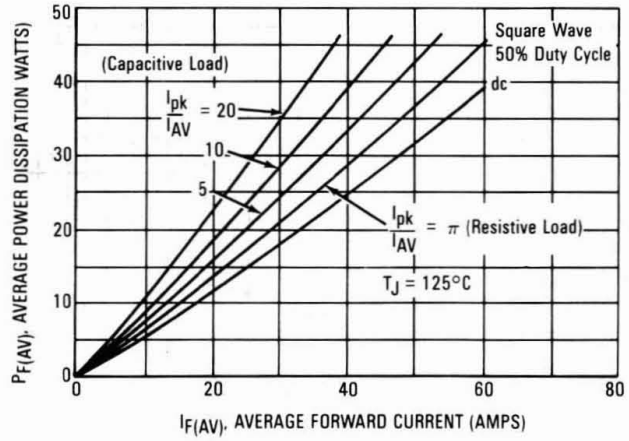

NOTE 2



DUTY CYCLE, $D = t_p/t_1$
PEAK POWER, P_{pk}, is peak of an equivalent square power pulse.

To determine maximum junction temperature of the diode in a given situation, the following procedure is recommended:

The temperature of the case should be measured using a thermocouple placed on the case. The thermal mass connected to the case is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of T_C, the junction temperature may be determined by:

$$T_J = T_C + \Delta T_{JC}$$

where ΔT_C is the increase in junction temperature above the case temperature. It may be determined by:

$\Delta T_{JC} = P_{pk} \cdot R_{\theta JC}[D + (1 - D) \cdot r(t_1 + t_p) + r(t_p) - r(t_1)]$ where
$r(t)$ = normalized value of transient thermal resistance at time, t, from Figure 8, i.e.:
$r(t_1 + t_p)$ = normalized value of transient thermal resistance at time $t_1 + t_p$.

FIGURE 8 — THERMAL RESPONSE

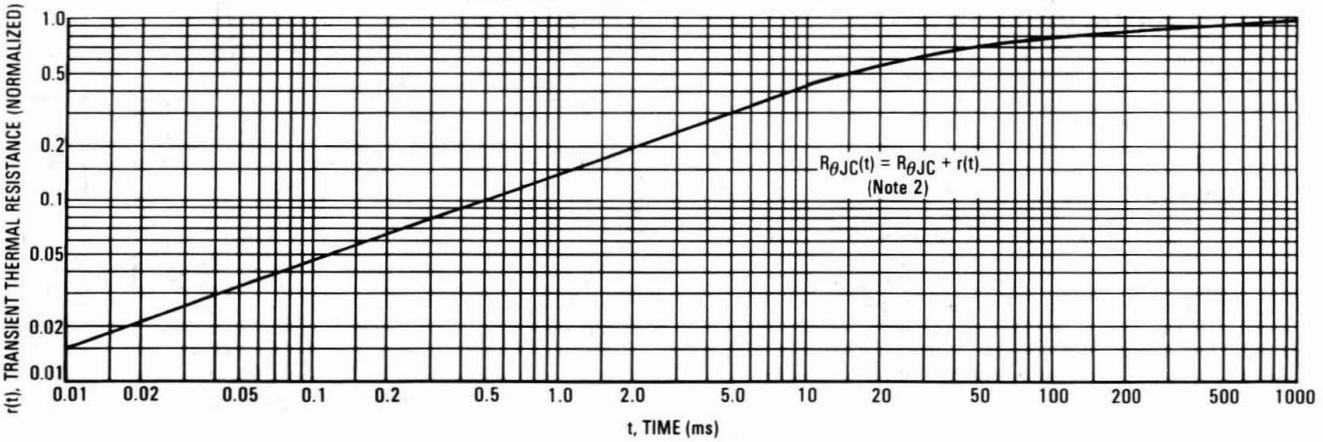

FIGURE 9 — SCHOTTKY RECTIFIER

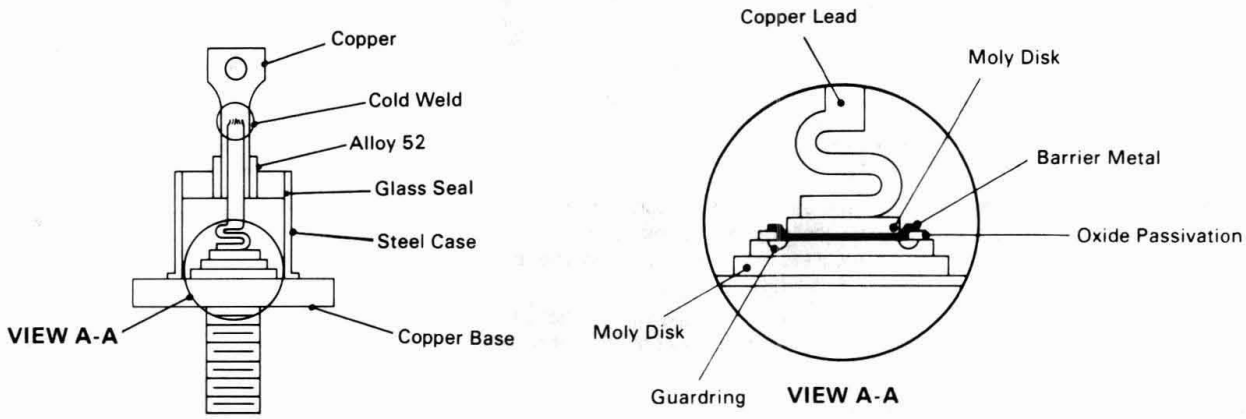

Motorola builds quality and reliability into its Schottky Rectifiers.

First is the chip, which has an interface metal between the platinum-barrier metal and nickel-gold ohmic-contact metal to eliminate any possible interaction with the barrier. The indicated guardring prevents dv/dt problems, so snubbers are not mandatory. The guardring also operates like a zener to absorb overvoltage transients.

Second is the package. There are molybdenum disks which closely match the thermal coefficient of expansion of silicon on each side of the chip. The top copper lead has a stress relief feature which protects the die during assembly. These two features give the unit the capability of passing stringent thermal fatigue tests for 5,000 cycles. The top copper lead provides a low resistance to current and therefore does not contribute to device heating; a heat sink should be used when attaching wires.

Third is the redundant electrical testing. The device is tested before assembly in "sandwich" form, with the chip between the moly disks. It is tested again after assembly. As part of the final electrical test, devices are 100% tested for dv/dt at 1,600 V/μs and reverse avalanche.

FIGURE 10 — TEST CIRCUIT FOR dv/dt AND REVERSE SURGE CURRENT

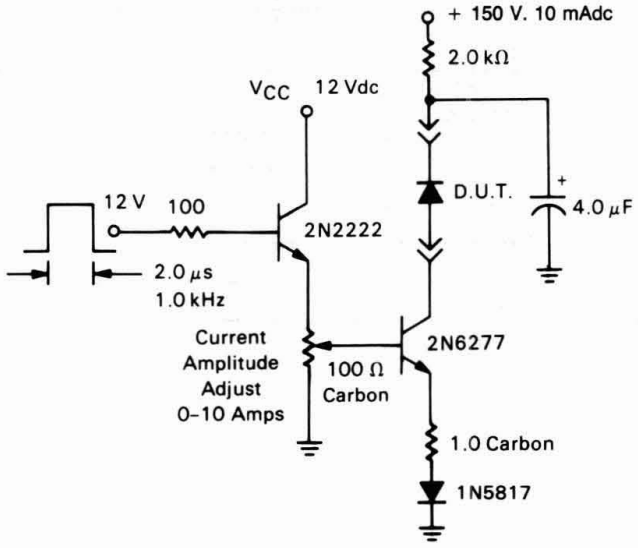

Switchmode Power Rectifiers

MBR6015L
MBR6020L
MBR6025L
MBR6030L

MBR6030L is a Motorola Preferred Device

. . . using a platinum barrier metal in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high frequency inverters, free-wheeling diodes, and polarity-protection diodes.

- Guaranteed Reverse Avalanche
- Guardring for dv/dt Stress Protection
- 175°C Operating Junction Temperature
- Extremely Low Forward Voltage

SCHOTTKY RECTIFIERS
60 AMPERES
15 TO 30 VOLTS

3

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 17 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 25 lb-in max
- Shipped 25 units per rail
- Marking: B6015L, B6020L, B6025L, B6030L

CASE 257-01
DO-203AB
METAL

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	MBR6015L MBR6020L MBR6025L MBR6030L	V_{RRM} V_{RWM} V_R	15 20 25 30	Volts
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 90°C		I_{FRM}	150	Amps
Average Rectified Forward Current (Rated V_R) T_C = 120°C		I_O	60	Amps
Peak Repetitive Reverse Surge Current (2 μs, 1 kHz) See Figure 7		I_{RRM}	2	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	10000	Amps
Operating Junction Temperature		T_J	−65 to +150	°C
Storage Temperature Range		T_{stg}	−65 to +175	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/μs

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.8	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 30 Amps, T_C = 25°C) (i_F = 60 Amps, T_C = 25°C) (i_F = 30 Amps, T_C = 150°C) (i_F = 60 Amps, T_C = 150°C)	v_F	 0.42 0.48 0.30 0.38	Volts
Maximum Instantaneous Reverse Current (1) (Rated Voltage, T_C = 25°C) (Rated Voltage, T_C = 125°C)	i_R	 50 280	mA
Capacitance (V_R = 1 Vdc, 100 kHz ≤ f ≤ 1 MHz)	C_t	6000	pF

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

Rev 1

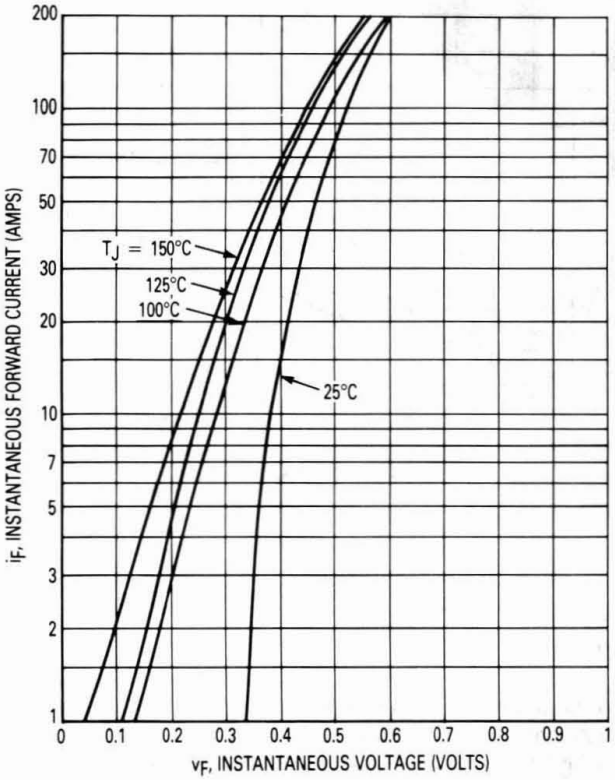

Figure 1. Typical Forward Voltage

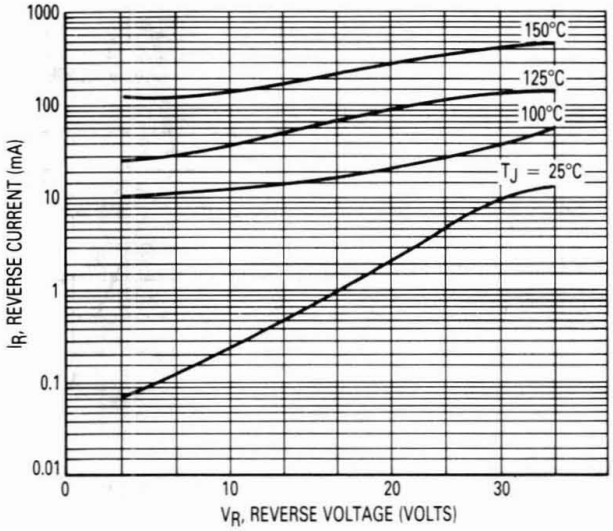

Figure 2. Typical Reverse Current*

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R.

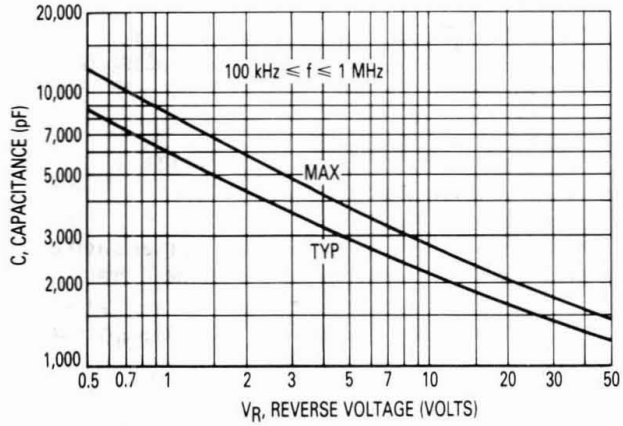

Figure 3. Capacitance

NOTE 1

HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 4.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 percent at 2 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

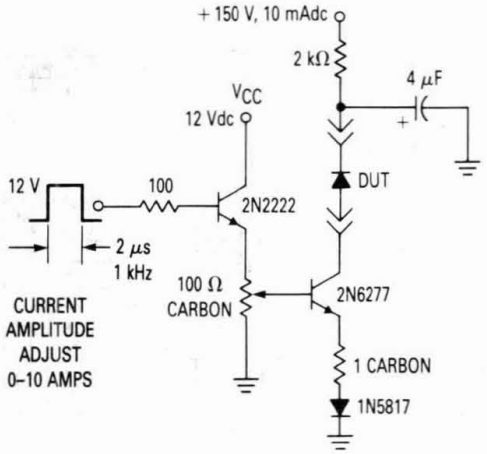

Figure 4. Test Circuit for dv/dt and Reverse Surge Current

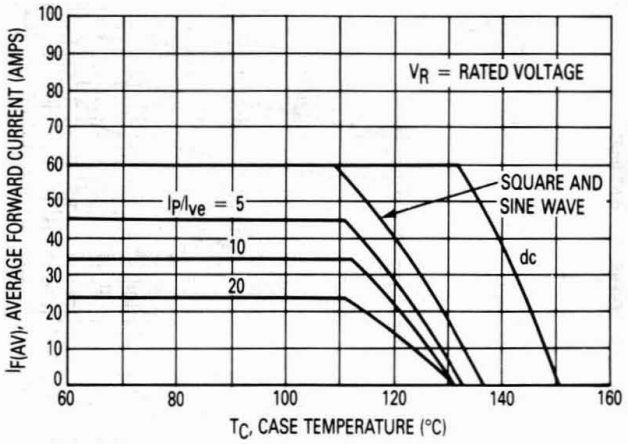

Figure 5. Forward Current Derating

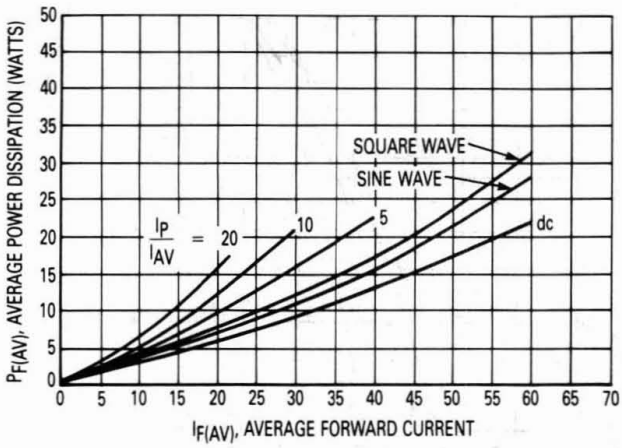

Figure 6. Power Dissipation

3

NOTE 2



DUTY CYCLE, D = t_p/t_1
PEAK POWER, P_{pk}, IS PEAK OF AN EQUIVALENT SQUARE POWER PULSE.

To determine maximum junction temperature of the diode in a given situation, the following procedure is recommended:

The temperature of the case should be measured using a thermocouple placed on the case. The thermal mass connected to the case is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of T_C, the junction temperature may be determined by:

$$T_J = T_C + \Delta T_{JC}$$

where ΔT_C is the increase in junction temperature above the case temperature. It may be determined by:

$$\Delta T_{JC} = P_{pk} \cdot R_{\theta JC}[D + (1 - D) \cdot r(t_1 + t_p) + r(t_p) - r(t_1)]$$

where

r(t) = normalized value of transient thermal resistance at time, t, from Figure 7, i.e.:

$r(t_1 - t_p)$ = normalized value of transient thermal resistance at time $t_1 + t_p$.

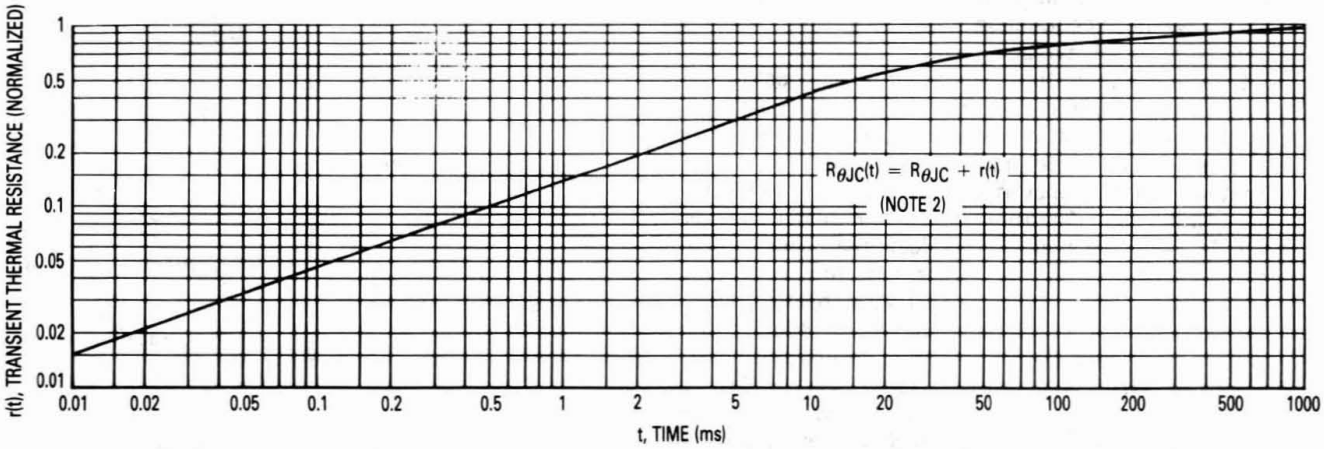

Figure 7. Thermal Response

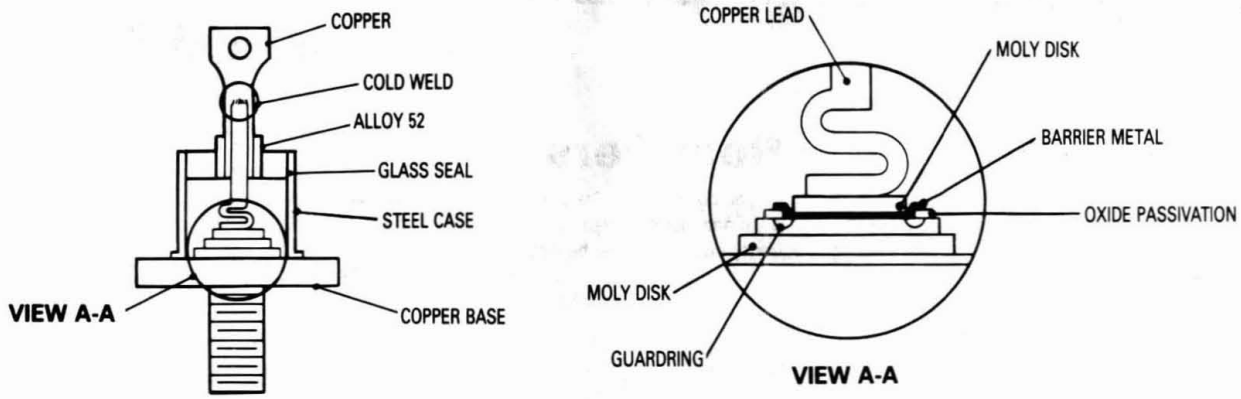

Motorola builds quality and reliability into its Schottky Rectifiers.

First is the chip, which has an interface metal between the platinum-barrier metal and nickel-gold ohmic-contact metal to eliminate any possible interaction with the barrier. The indicated guardring prevents dv/dt problems, so snubbers are not mandatory. The guardring also operates like a zener to absorb overvoltage transients.

Second is the package. There are molybdenum disks which closely match the thermal coefficient of expansion of silicon on each side of the chip. The top copper lead has a stress relief feature which protects the die during assembly. These two features give the unit the capability of passing stringent thermal fatique tests for 5,000 cycles. The top copper lead provides a low resistance to current and therefore does not contribute to device heating; a heat sink should be used when attaching wires.

Third is the redundant electrical testing. The device is tested before assembly in "sandwich" form, with the chip between the moly disks. It is tested again after assembly. As part of the final electrical test, devices are 100% tested for dv/dt at 1,600 V/μs and reverse avalanche.

Figure 8. Schottky Rectifier

MBR6035
MBR6045

MBR6045 is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . using a platinum barrier metal in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free-wheeling diodes, and polarity-protection diodes.

- Guaranteed Reverse Avalanche
- Guardring for dv/dt Stress Protection
- 150°C Operating Junction Temperature
- Low Forward Voltage

SCHOTTKY RECTIFIERS

60 AMPERES
35 AND 45 VOLTS

3

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 17 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 25 lb-in max
- Shipped 25 units per rail
- Marking: B6035, B6045

CASE 257-01
DO-203AB
METAL

MAXIMUM RATINGS

Rating	Symbol	MBR6035	MBR6045	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 100°C	I_{FRM}	120		Amps
Average Rectified Forward Current (Rated V_R) T_C = 100°C	I_O	60		Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz) See Figure 7	I_{RRM}	2.0		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	800		Amps
Operating Junction Temperature	T_J	-65 to + 150		°C
Storage Temperature	T_{stg}	-65 to +175		°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000		V/μs

THERMAL CHARACTERISTICS

Characteristic	Symbol	Typ	Max	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.85	1.0	°C/W

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Typ	Max	Unit
Instantaneous Forward Voltage (1) (i_F = 60 Amp, T_C = 25°C) (i_F = 60 Amp, T_C = 125°C) (i_F = 120 Amp, T_C = 125°C)	v_F	 0.65 0.57 0.70	 0.70 0.60 0.76	Volts
Instantaneous Reverse Current (1) (Rated Voltage, T_C = 25°C) (Rated Voltage, T_C = 125°C)	i_R	 0.1 55	 0.3 100	mA
Capacitance (V_R = 1.0 Vdc, 100 kHz ≤ 1.0 MHz)	C_t	3000	3700	pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%

Rev 2

FIGURE 1 — TYPICAL FORWARD VOLTAGE

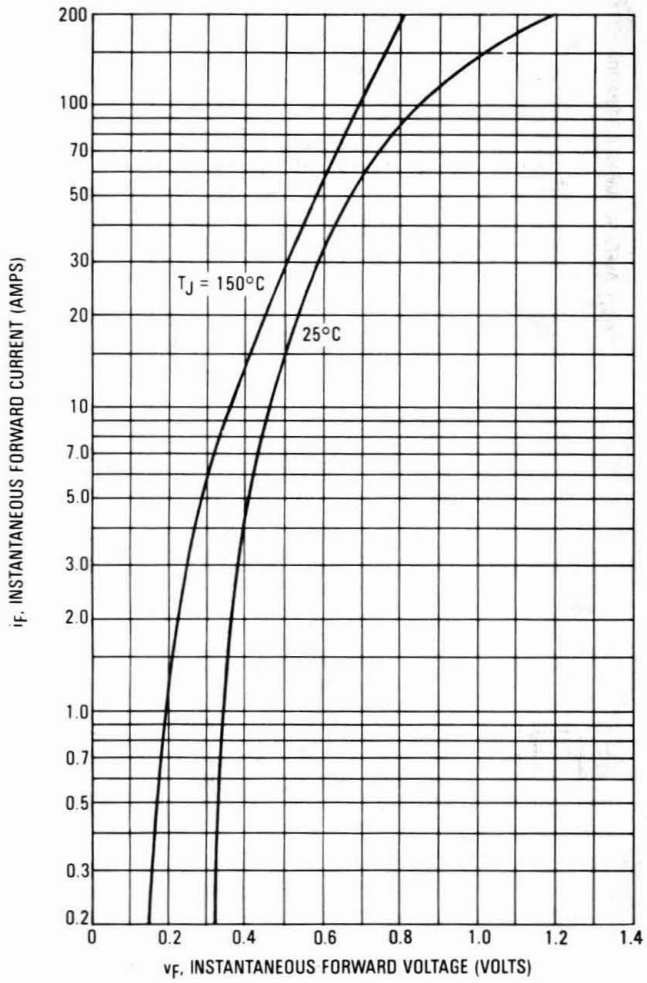

FIGURE 2 — TYPICAL REVERSE CURRENT

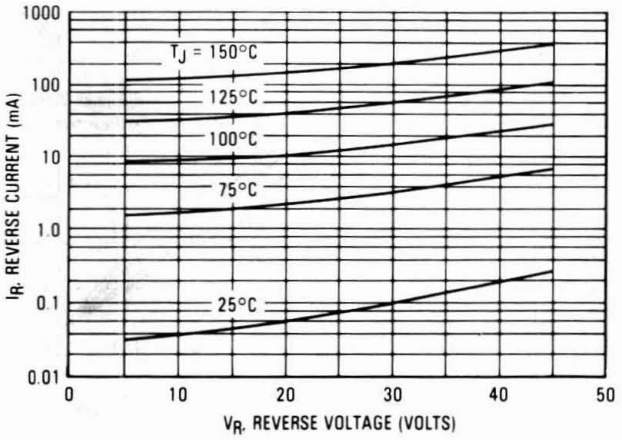

FIGURE 3 — MAXIMUM SURGE CAPABILITY

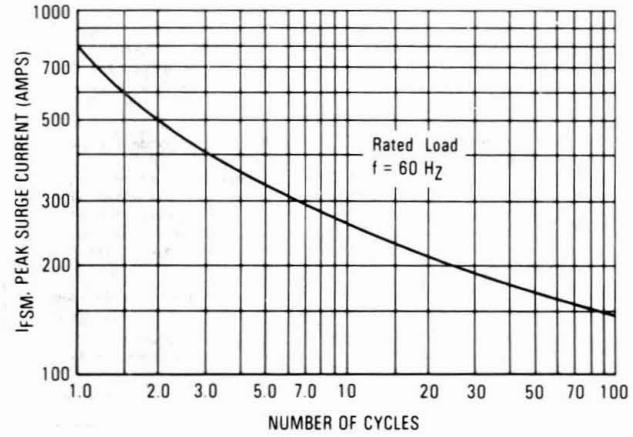

FIGURE 4 — CAPACITANCE

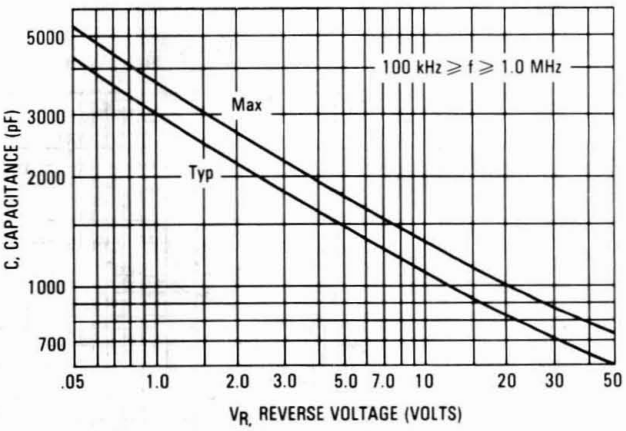

NOTE 1
HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 4.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

3

FIGURE 5 — FORWARD CURRENT DERATING

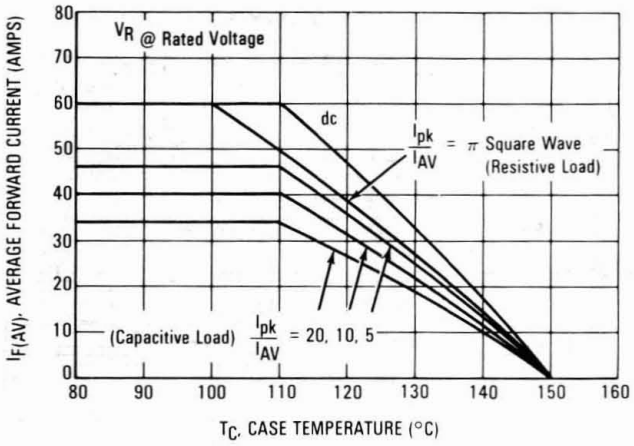

FIGURE 6 — POWER DISSIPATION

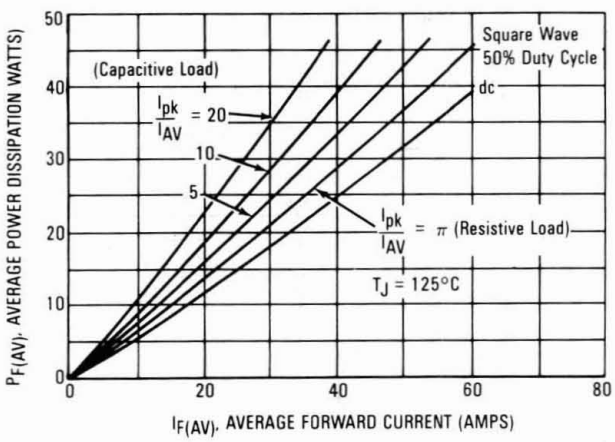

NOTE 2



DUTY CYCLE, D = t_p/t_1
PEAK POWER, P_{pk}, is peak of an equivalent square power pulse.

To determine maximum junction temperature of the diode in a given situation, the following procedure is recommended:

The temperature of the case should be measured using a thermocouple placed on the case. The thermal mass connected to the case is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of T_C, the junction temperature may be determined by:

$$T_J = T_C + \Delta T_{JC}$$

where ΔT_C is the increase in junction temperature above the case temperature. It may be determined by:

$\Delta T_{JC} = P_{pk} \cdot R_{\theta JC}[D + (1 - D) \cdot r(t_1 + t_p) + r(t_p) - r(t_1)]$ where

r(t) = normalized value of transient thermal resistance at time, t, from Figure 8, i.e.:

$r(t_1 + t_p)$ = normalized value of transient thermal resistance at time $t_1 + t_p$.

FIGURE 7 — TEST CIRCUIT FOR dv/dt AND REVERSE SURGE CURRENT

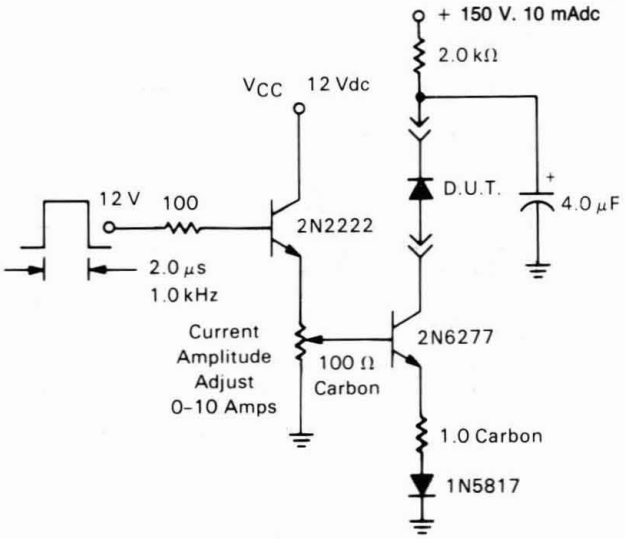

FIGURE 8 — THERMAL RESPONSE

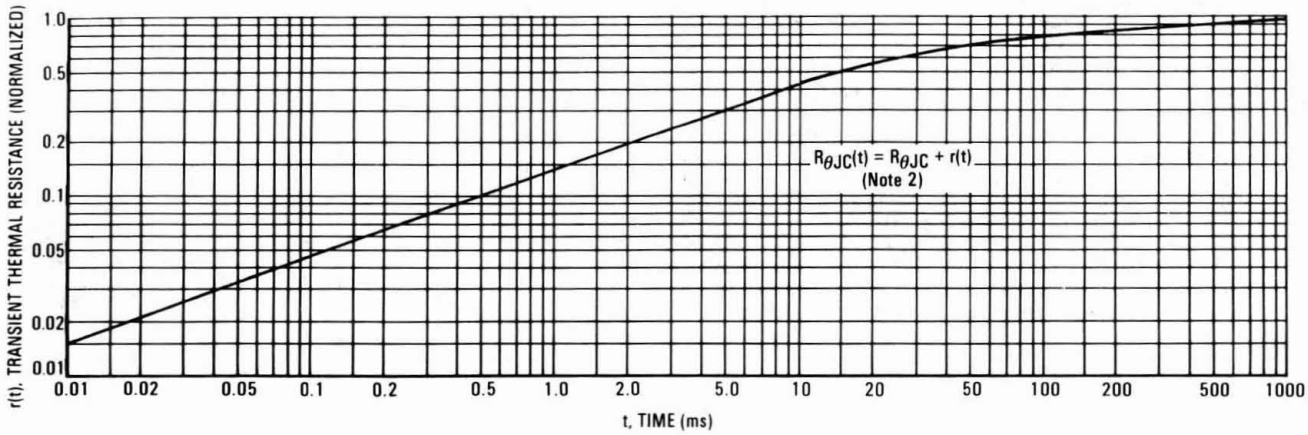

FIGURE 9 — SCHOTTKY RECTIFIER

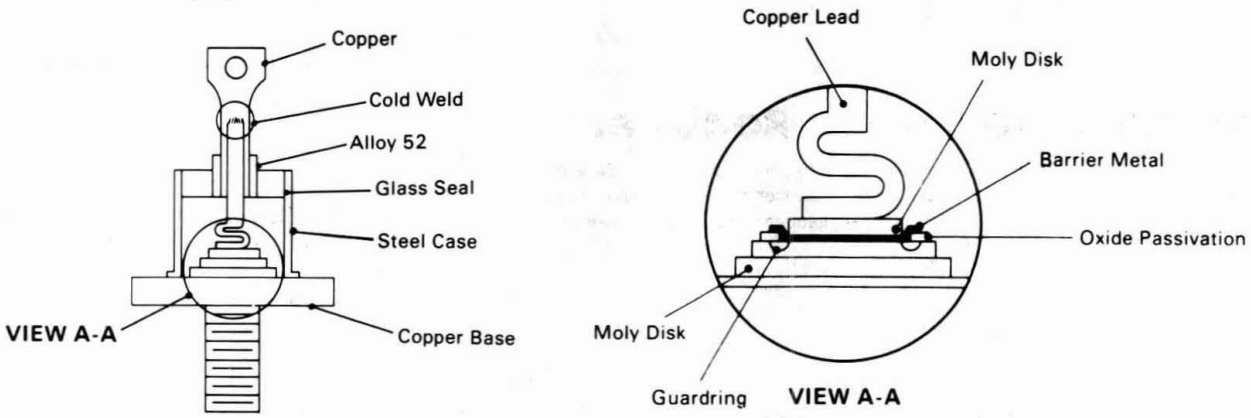

Motorola builds quality and reliability into its Schottky Rectifiers.

First is the chip, which has an interface metal between the platinum-barrier metal and nickel-gold ohmic-contact metal to eliminate any possible interaction with the barrier. The indicated guardring prevents dv/dt problems, so snubbers are not mandatory. The guardring also operates like a zener to absorb overvoltage transients.

Second is the package. There are molybdenum disks which closely match the thermal coefficient of expansion of silicon on each side of the chip. The top copper lead has a stress relief feature which protects the die during assembly. These two features give the unit the capability of passing stringent thermal fatigue tests for 5,000 cycles. The top copper lead provides a low resistance to current and therefore does not contribute to device heating; a heat sink should be used when attaching wires.

Third is the redundant electrical testing. The device is tested before assembly in "sandwich" form, with the chip between the moly disks. It is tested again after assembly. As part of the final electrical test, devices are 100% tested for dv/dt at 1,600 V/μs and reverse avalanche.

3

MBR6535
MBR6545

MBR6545 is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . using a platinum barrier metal in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free-wheeling diodes, and polarity-protection diodes.

- Guaranteed Reverse Avalanche
- Guardring for dv/dt Stress Protection
- 175°C Operating Junction Temperature
- Low Forward Voltage

3

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 17 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 25 lb-in max
- Shipped 25 units per rail
- Marking: B6535, B6545

HIGH TEMPERATURE SCHOTTKY RECTIFIERS

65 AMPERES
35 and 45 VOLTS

CASE 257-01
DO-203AB
METAL

MAXIMUM RATINGS

Rating	Symbol	MBR6535	MBR6545	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 120°C	I_{FRM}	130	130	Amps
Average Rectified Forward Current (Rated V_R) T_C = 120°C	I_O	65	65	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz) See Figure 7	I_{RRM}	2.0	2.0	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	800	800	Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	-65 to +175	-65 to +175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	10000	V/μs

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	1.0	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 65 Amp, T_C = 25°C) (i_F = 65 Amp, T_C = 150°C) (i_f = 130 Amp, T_C = 150°C)	v_F	 0.78 0.62 0.73	 0.78 0.62 0.73	Volts
Maximum Instantaneous Reverse Current (1) (Rated Voltage, T_C = 25°C) (Rated Voltage, T_C = 150°C)	i_R	 0.07 125	 0.07 125	mA
Capacitance (V_R = 1.0 Vdc, 100 kHz ≤ f ≤ 1.0 MHz)	C_t	3700	3700	pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 1

FIGURE 1 — TYPICAL FORWARD VOLTAGE

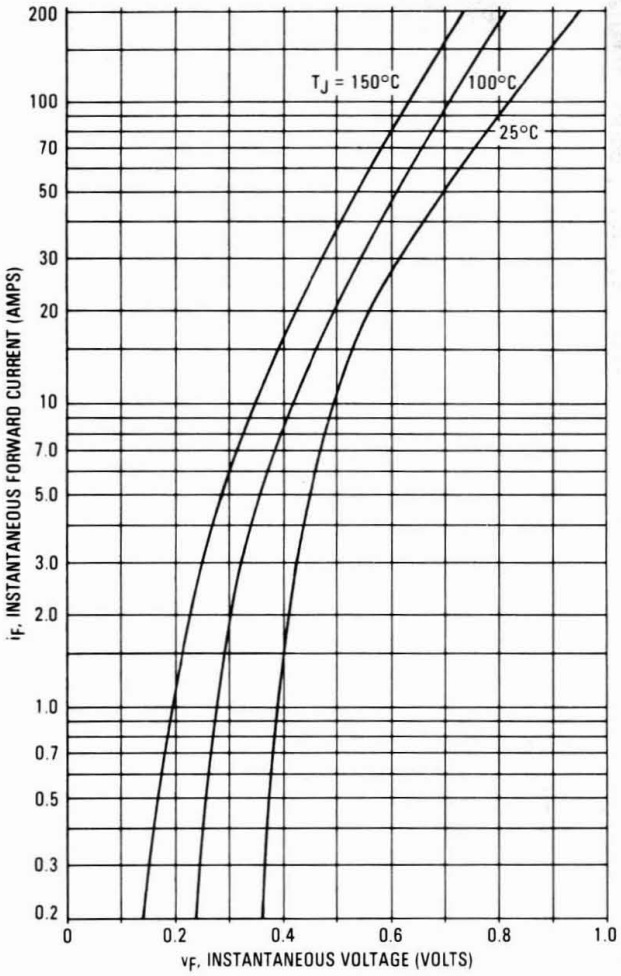

FIGURE 2 — TYPICAL REVERSE CURRENT

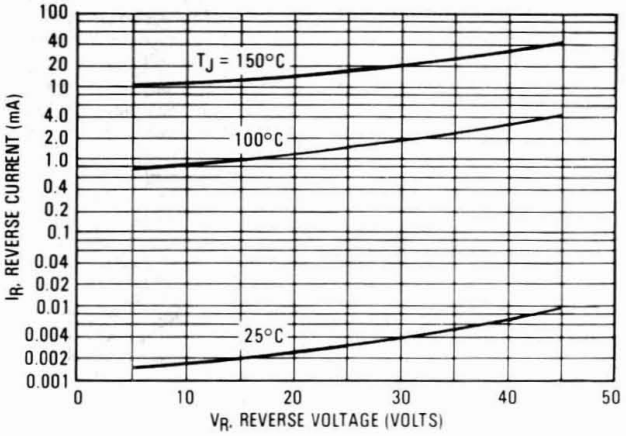

FIGURE 3 — MAXIMUM SURGE CAPABILITY

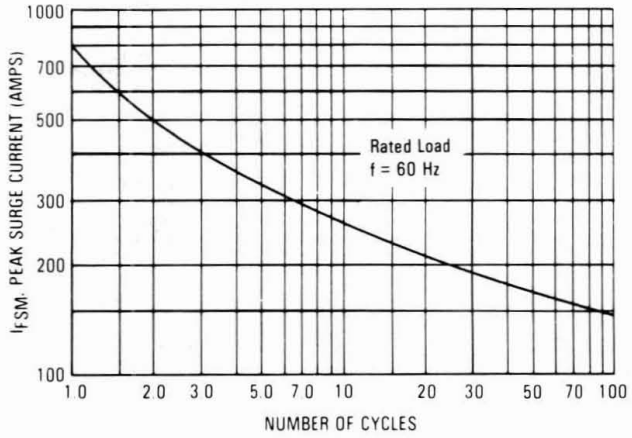

NOTE 1
HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 4.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

FIGURE 4 — CAPACITANCE

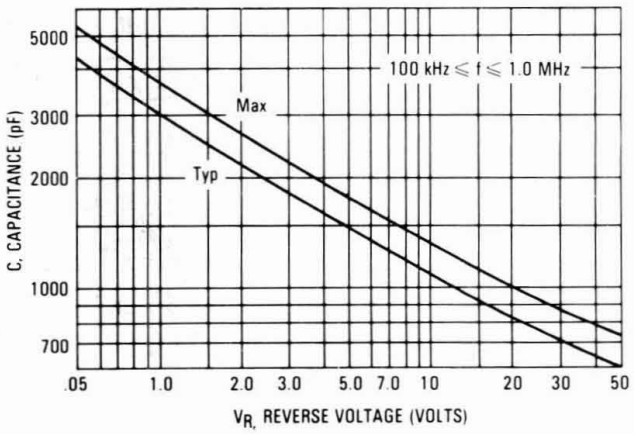

3

FIGURE 5 — FORWARD CURRENT DERATING

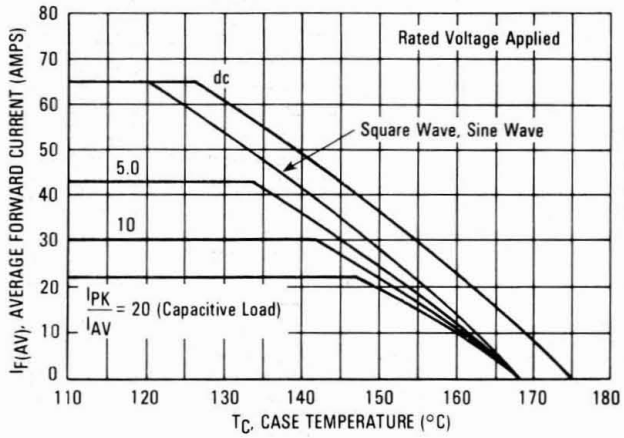

FIGURE 6 — POWER DISSIPATION

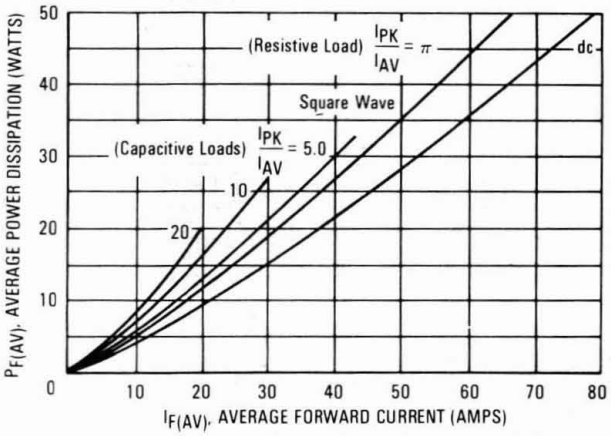

NOTE 2



DUTY CYCLE, $D = t_p/t_1$
PEAK POWER, P_{pk}, is peak of an equivalent square power pulse.

To determine maximum junction temperature of the diode in a given situation, the following procedure is recommended:

The temperature of the case should be measured using a thermocouple placed on the case. The thermal mass connected to the case is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of T_C, the junction temperature may be determined by:

$$T_J = T_C + \Delta T_{JC}$$

where ΔT_C is the increase in junction temperature above the case temperature. It may be determined by:

$$\Delta T_{JC} = P_{pk} \cdot R_{\theta JC}[D + (1 - D) \cdot r(t_1 + t_p) + r(t_p) - r(t_1)] \text{ where}$$

$r(t)$ = normalized value of transient thermal resistance at time, t, from Figure 8, i.e.:

$r(t_1 + t_p)$ = normalized value of transient thermal resistance at time $t_1 + t_p$

FIGURE 7 — TEST CIRCUIT FOR dv/dt AND REVERSE SURGE CURRENT

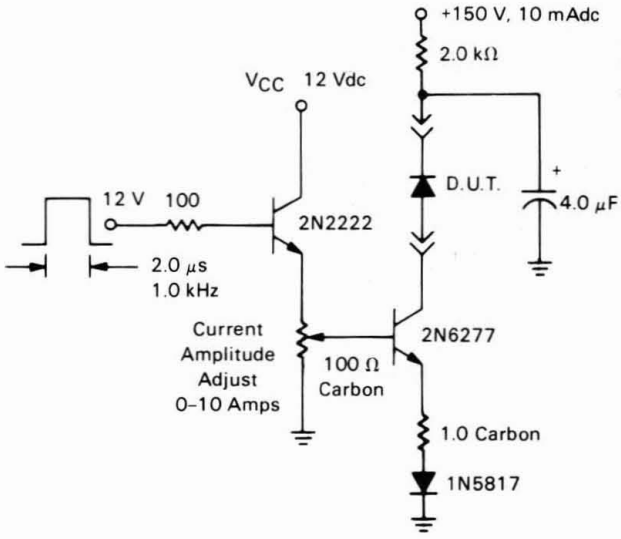

FIGURE 8 — THERMAL RESPONSE

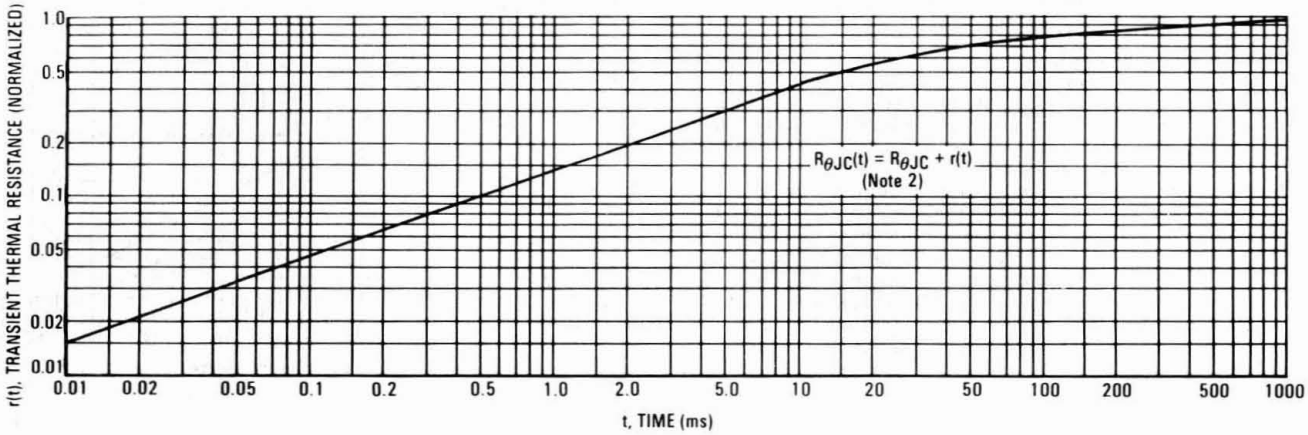

FIGURE 9 — SCHOTTKY RECTIFIER

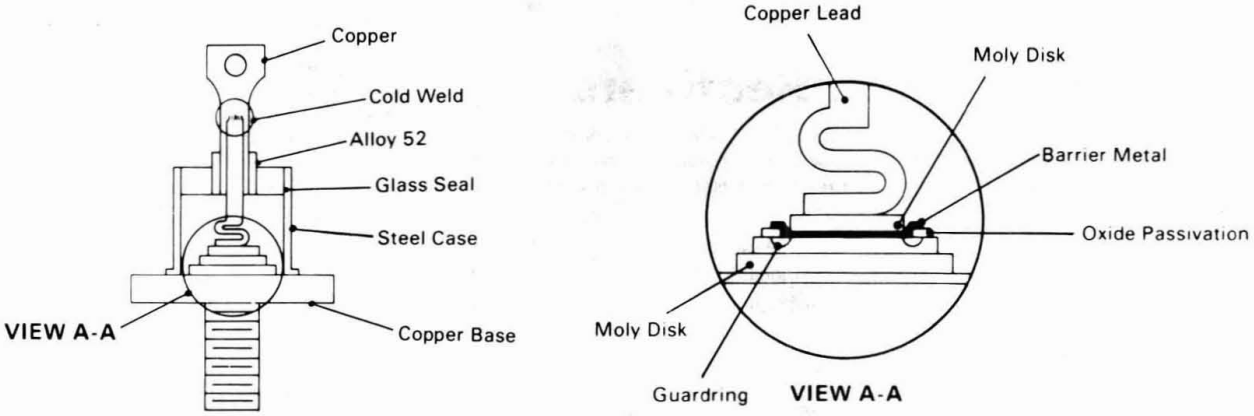

Motorola builds quality and reliability into its Schottky Rectifiers.

First is the chip, which has an interface metal between the platinum-barrier metal and nickel-gold ohmic-contact metal to eliminate any possible interaction with the barrier. The indicated guardring prevents dv/dt problems, so snubbers are not mandatory. The guardring also operates like a zener to absorb overvoltage transients.

Second is the package. There are molybdenum disks which closely match the thermal coefficient of expansion of silicon on each side of the chip. The top copper lead has a stress relief feature which protects the die during assembly. These two features give the unit the capability of passing stringent thermal fatigue tests for 5,000 cycles. The top copper lead provides a low resistance to current and therefore does not contribute to device heating; a heat sink should be used when attaching wires.

Third is the redundant electrical testing. The device is tested before assembly in "sandwich" form, with the chip between the moly disks. It is tested again after assembly. As part of the final electrical test, devices are 100% tested for dv/dt at 1,600 V/μs and reverse avalanche.

3

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MBR7535
MBR7545

MBR7545 is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . employing the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free-wheeling diodes, and polarity-protection diodes.

- Extremely Low v_F
- Low Stored Charge, Majority Carrier Conduction
- Low Power Loss/ High Efficiency
- High Surge Capacity

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 17 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 25 lb-in max
- Shipped 25 units per rail
- Marking: B7535, B7545

SCHOTTKY BARRIER RECTIFIERS
75 AMPERES
35 AND 45 VOLTS

CASE 257-01
DO-203AB
METAL

3

MAXIMUM RATINGS

Rating	Symbol	MBR7535	MBR7545	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz)	I_{FRM}	150 T_C = 90°C		Amp
Average Rectified Forward Current (Rated V_R)	I_O	75 T_C = 90°C		Amp
Non-repetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	1000		Amp
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +150		°C
Peak Operating Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175		°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000		V/μs

THERMAL CHARACTERISTICS

Rating	Symbol	MBR7535	MBR7545	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.8		°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Rating	Symbol	MBR7535	MBR7545	Unit
Maximum Instantaneous Forward Voltage (1) (i_F = 60 Amp, T_C = 125°C) (i_F = 220 Amp, T_C = 125°C)	v_F	0.60 0.90		Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C)	i_R	150	250	mA
Capacitance (V_R = 5.0 Vdc, 100 kHz ≤ f ≤ 1.0 MHz)	C_t	4000		pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle = 2.0%.

Rev 2

FIGURE 1 – TYPICAL FORWARD VOLTAGE

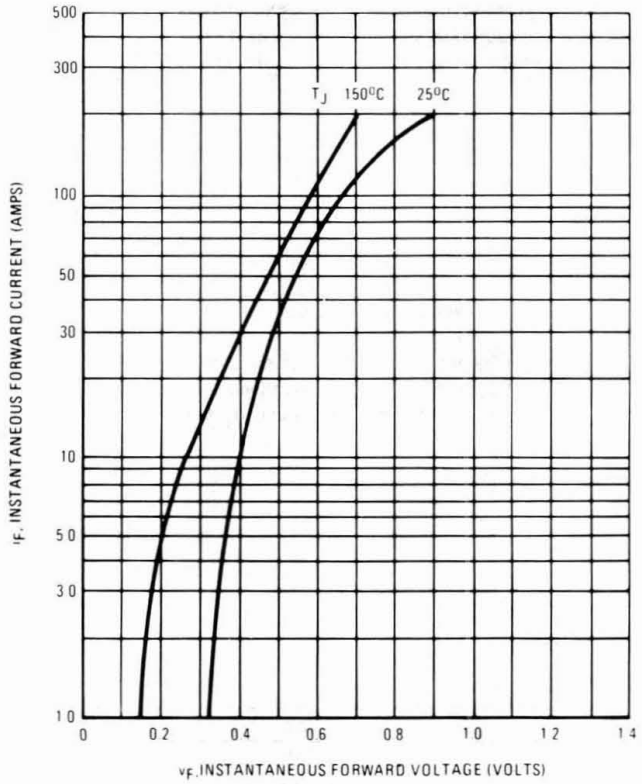

FIGURE 2 – CURRENT DERATING

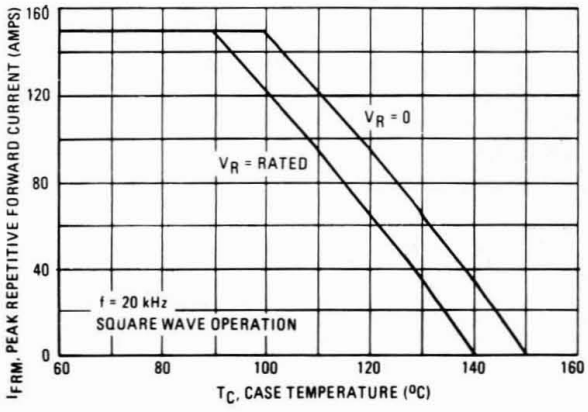

FIGURE 3 – TYPICAL REVERSE OPERATION

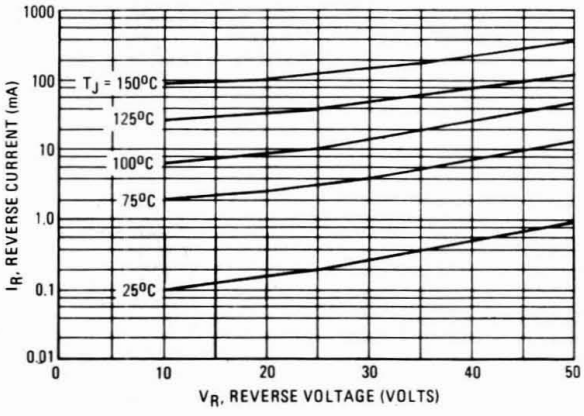

MBR8035
MBR8045

MBR8045 is a
Motorola Preferred Device

Switchmode Power Rectifiers

. . . using a platinum barrier metal in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlap contact. Ideally suited for use as rectifiers in low-voltage, high-frequency inverters, free-wheeling diodes, and polarity-protection diodes.

- Guaranteed Reverse Avalanche
- Guardring for dv/dt Stress Protection
- 175°C Operating Junction Temperature
- Low Forward Voltage

3

Mechanical Characteristics:

- Case: Welded steel, hermetically sealed
- Weight: 17 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Lead is Readily Solderable
- Solder Heat: The excellent heat transfer property of the heavy duty copper anode terminal which transmits heat away from the die requires that caution be used when attaching wires. Motorola suggests a heat sink be clamped between the eyelet and the body during any soldering operation.
- Stud Torque: 25 lb-in max
- Shipped 25 units per rail
- Marking: B8035, B8045

SCHOTTKY RECTIFIERS

80 AMPERES
35 and 45 VOLTS

CASE 257-01
DO-203AB
METAL

MAXIMUM RATINGS

Rating	Symbol	MBR8035	MBR8045	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	35	45	Volts
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 120°C	I_{FRM}	160	160	Amps
Average Rectified Forward Current (Rated V_R) T_C = 120°C	I_O	80	80	Amps
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz) See Figure 7	I_{RRM}	2.0	2.0	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	1000	1000	Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	-65 to +175	-65 to +175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	1000	10000	V/μs

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.80	0.80	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 80 Amp, T_C = 25°C) (i_F = 80 Amp, T_C = 150°C) (i_F = 160 Amp, T_C = 150°C)	v_F	 0.72 0.59 0.67	 0.72 0.59 0.67	Volts
Maximum Instantaneous Reverse Current (1) (Rated Voltage, T_C = 25°C) (Rated Voltage, T_C = 150°C)	i_R	 1.0 150	 1.0 150	mA
Capacitance (V_R = 1.0 Vdc, 100 kHz ≤ f ≤ 1.0 MHz)	C_t	5000	5000	pF

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 1

FIGURE 1 — TYPICAL FORWARD VOLTAGE

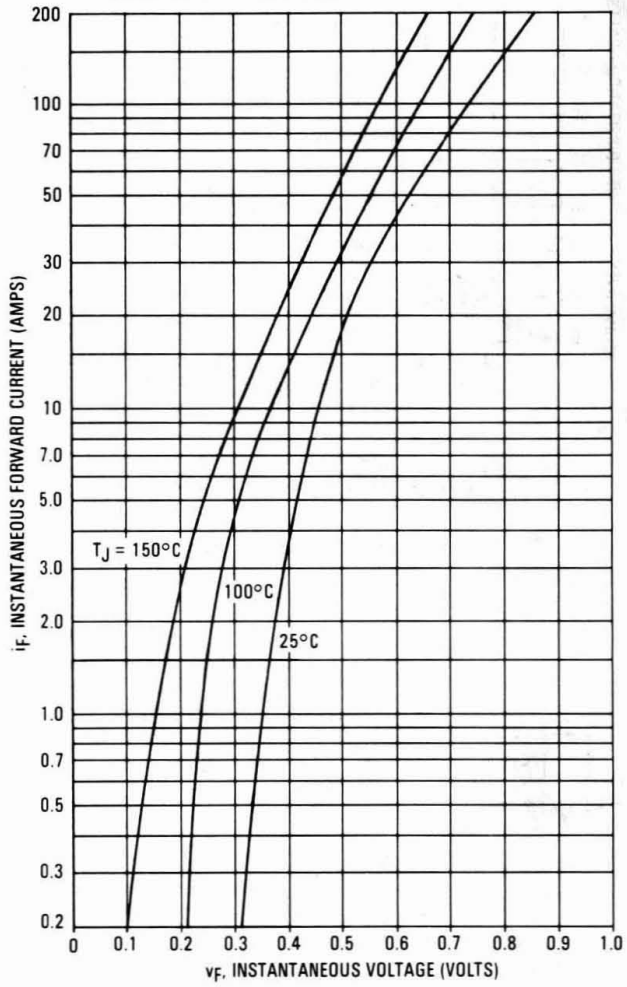

FIGURE 2 — TYPICAL REVERSE CURRENT

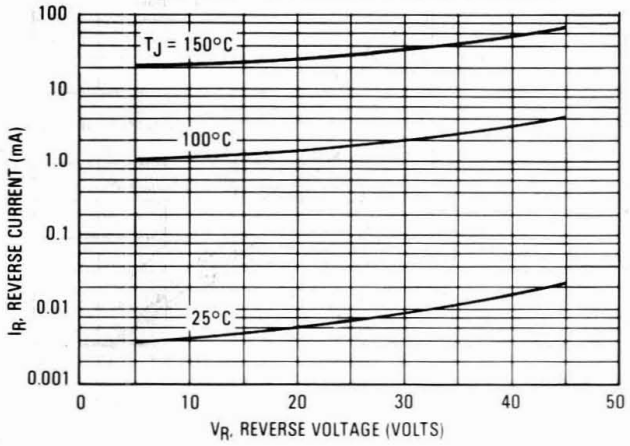

3

FIGURE 3 — MAXIMUM SURGE CAPABILITY

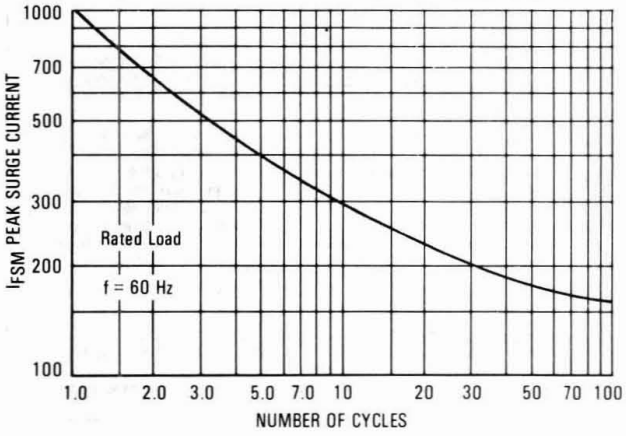

NOTE 1
HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 4.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficiency is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

FIGURE 4 — CAPACITANCE

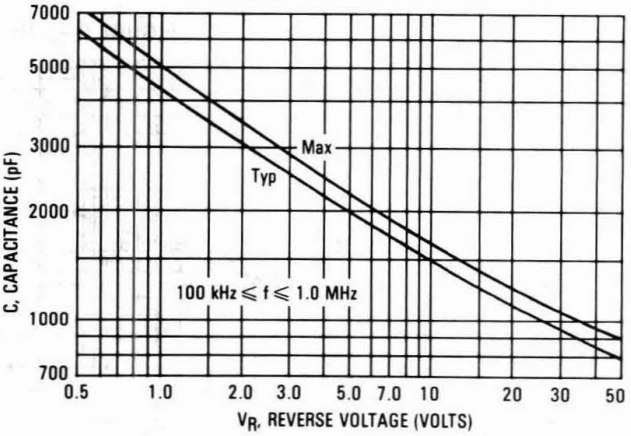

FIGURE 5 — FORWARD CURRENT DERATING

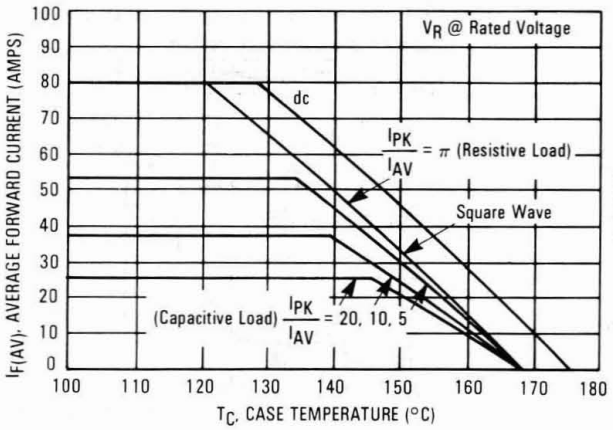

FIGURE 6 — POWER DISSIPATION

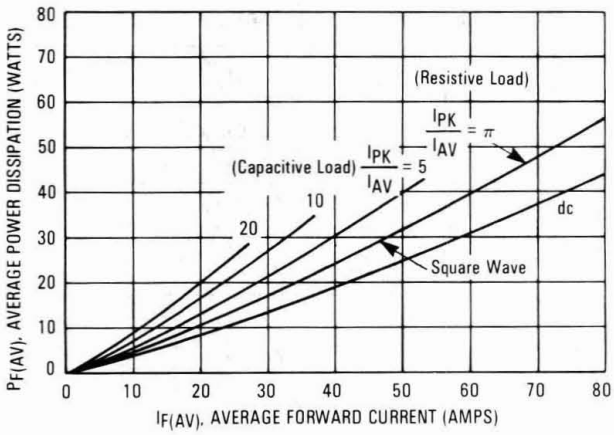

NOTE 2



DUTY CYCLE, D = t_p/t_1
PEAK POWER, P_{pk}, is peak of an equivalent square power pulse.

To determine maximum junction temperature of the diode in a given situation, the following procedure is recommended:

The temperature of the case should be measured using a thermocouple placed on the case. The thermal mass connected to the case is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady-state conditions are achieved. Using the measured value of T_C, the junction temperature may be determined by:

$$T_J = T_C + \Delta T_{JC}$$

where ΔT_C is the increase in junction temperature above the case temperature. It may be determined by:

$\Delta T_{JC} = P_{pk} \cdot R_{\theta JC}[D + (1 - D) \cdot r(t_1 + t_p) + r(t_p) - r(t_1)]$ where

r(t) = normalized value of transient thermal resistance at time, t, from Figure 8, i.e.:

$r(t_1 + t_p)$ = normalized value of transient thermal resistance at time $t_1 + t_p$.

FIGURE 7 — TEST CIRCUIT FOR dv/dt AND REVERSE SURGE CURRENT

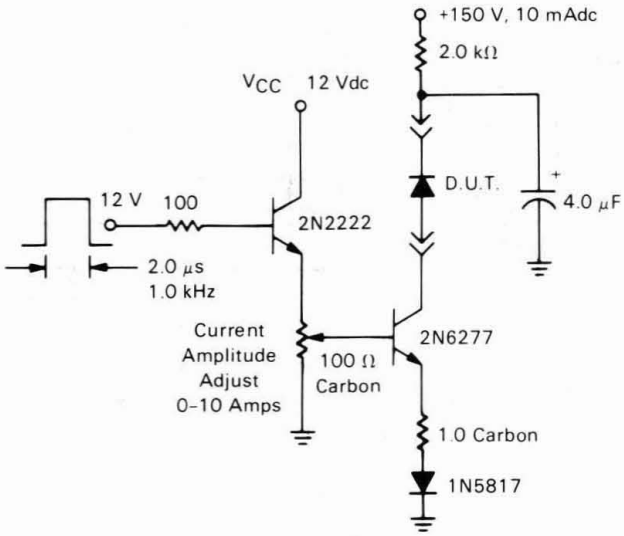

FIGURE 8 — THERMAL RESPONSE

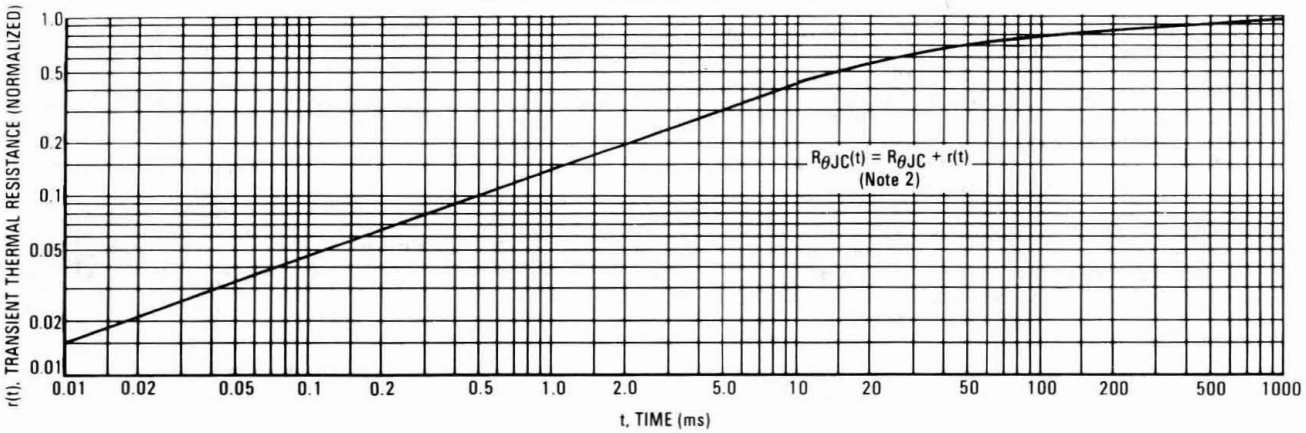

FIGURE 9 — SCHOTTKY RECTIFIER

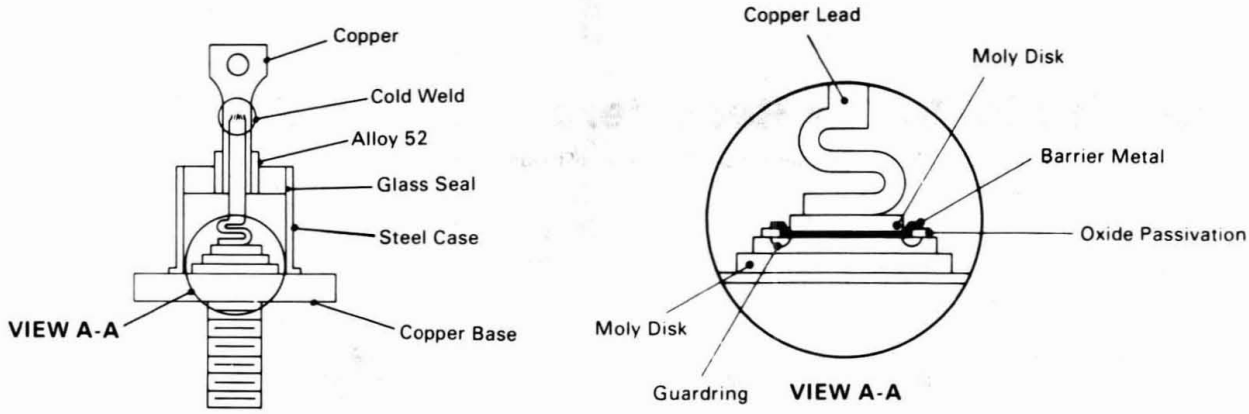

Motorola builds quality and reliability into its Schottky Rectifiers.

First is the chip, which has an interface metal between the platinum-barrier metal and nickel-gold ohmic-contact metal to eliminate any possible interaction with the barrier. The indicated guardring prevents dv/dt problems, so snubbers are not mandatory. The guardring also operates like a zener to absorb overvoltage transients.

Second is the package. There are molybdenum disks which closely match the thermal coefficient of expansion of silicon on each side of the chip. The top copper lead has a stress relief feature which protects the die during assembly. These two features give the unit the capability of passing stringent thermal fatigue tests for 5,000 cycles. The top copper lead provides a low resistance to current and therefore does not contribute to device heating; a heat sink should be used when attaching wires.

Third is the redundant electrical testing. The device is tested before assembly in "sandwich" form, with the chip between the moly disks. It is tested again after assembly. As part of the final electrical test, devices are 100% tested for dv/dt at 1,600 V/μs and reverse avalanche.

3

MBR3045CT
SD241

MBR3045CT and SD241 are Motorola Preferred Devices

Switchmode Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Dual Diode Construction
- Guardring for Stress Protection
- Low Forward Voltage
- 150°C Operating Junction Temperature
- Guaranteed Reverse Avalanche

Mechanical Characteristics:

- Case: Copper slug header, welded steel can, hermetically sealed
- Weight: 18.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 100 units per foam tray
- Marking: MBR3045CT, SD241

SCHOTTKY BARRIER RECTIFIERS

30 AMPERES
20 to 45 VOLTS

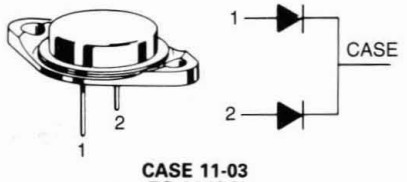

**CASE 11-03
TO-204AA
METAL**

3

MAXIMUM RATINGS

Rating	Symbol	MBR3045CT	SD241	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	45	Volts
Average Rectified Forward Current (Rated V_R) T_C = 105°C — Per Device Per Diode	I_O	30 15	30 15	Amps
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz)	I_{FRM}	30	30	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	400	400	Amps
Peak Repetitive Reverse Current, Per Diode (2.0 µs, 1.0 kHz) See Figure 8	I_{RRM}	2.0	2.0	Amps
Operating Junction Temperature	T_J	−65 to +150	−65 to +150	°C
Storage Temperature	T_{stg}	−65 to +175	−65 to +175	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_J(pk)$	175	175	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	10000	V/µs

THERMAL CHARACTERISTICS PER DIODE

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.4	1.4	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Maximum Instantaneous Forward Voltage (1) (i_F = 10 Amp, T_C = 125°C) (i_F = 20 Amp, T_C = 125°C) (i_F = 30 Amp, T_C = 125°C) (i_F = 30 Amp, T_C = 25°C)	v_F	 — 0.60 0.72 0.76	 0.47 0.60 — —	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 60 1.0	 100 V_R = 35 V	mA
Capacitance	C_t	2000	2000	pF

(1) Pulse Test: Pulse Width = 300 µs, Duty Cycle ≤ 2.0%

Rev 2

FIGURE 1 — TYPICAL FORWARD VOLTAGE

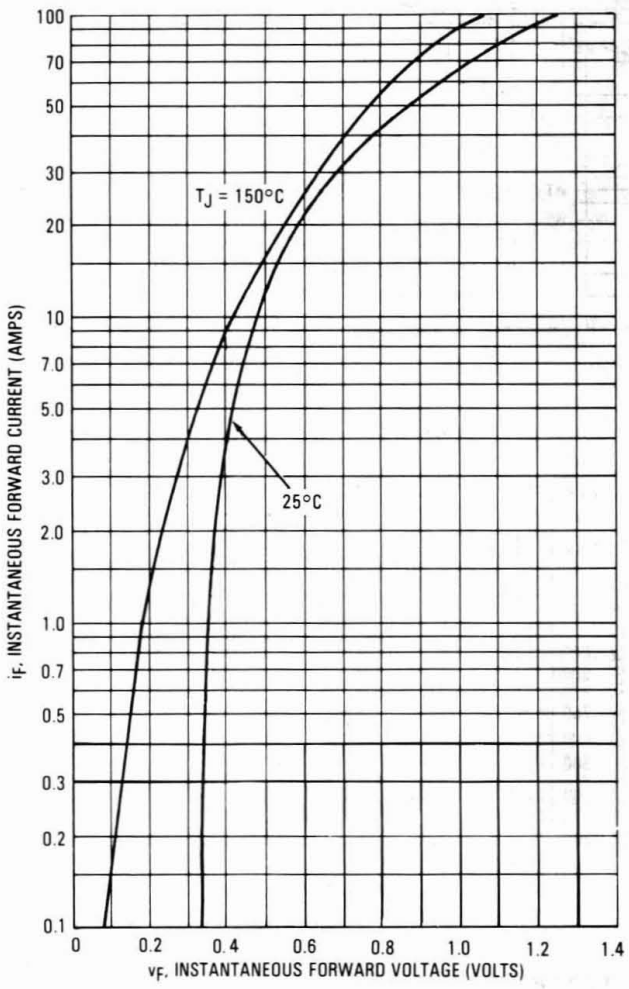

FIGURE 2 — TYPICAL REVERSE CURRENT

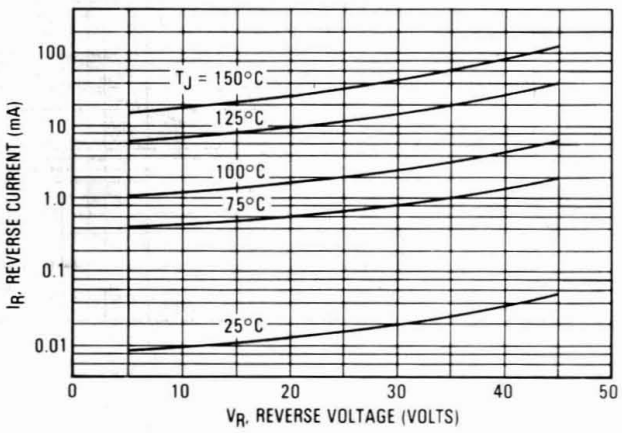

FIGURE 3 — MAXIMUM SURGE CAPABILITY

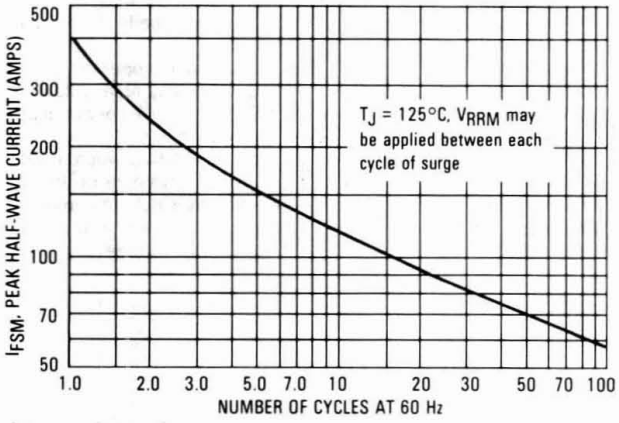

FIGURE 4 — CURRENT DERATING

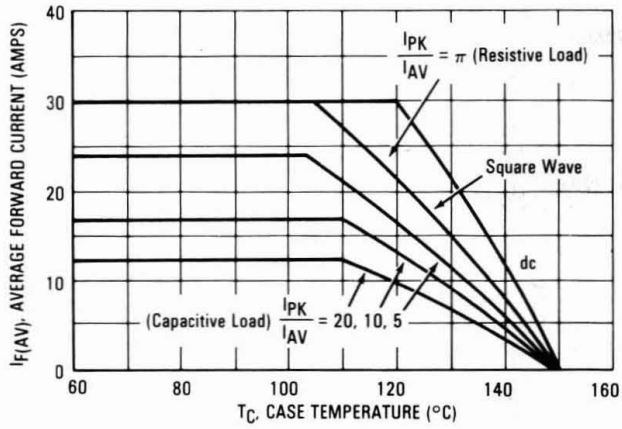

FIGURE 5 — FORWARD POWER DISSIPATION

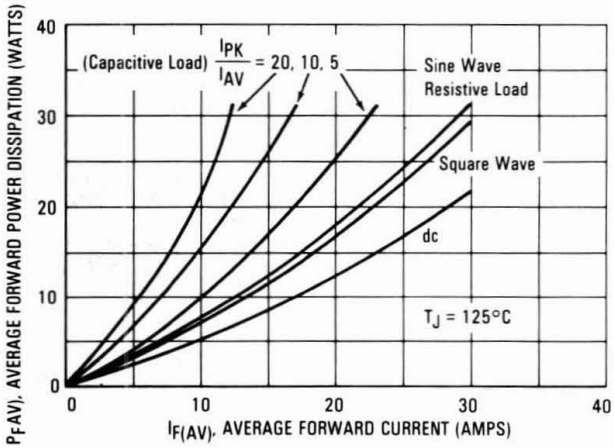

FIGURE 6 — THERMAL RESPONSE PER DIODE LEG

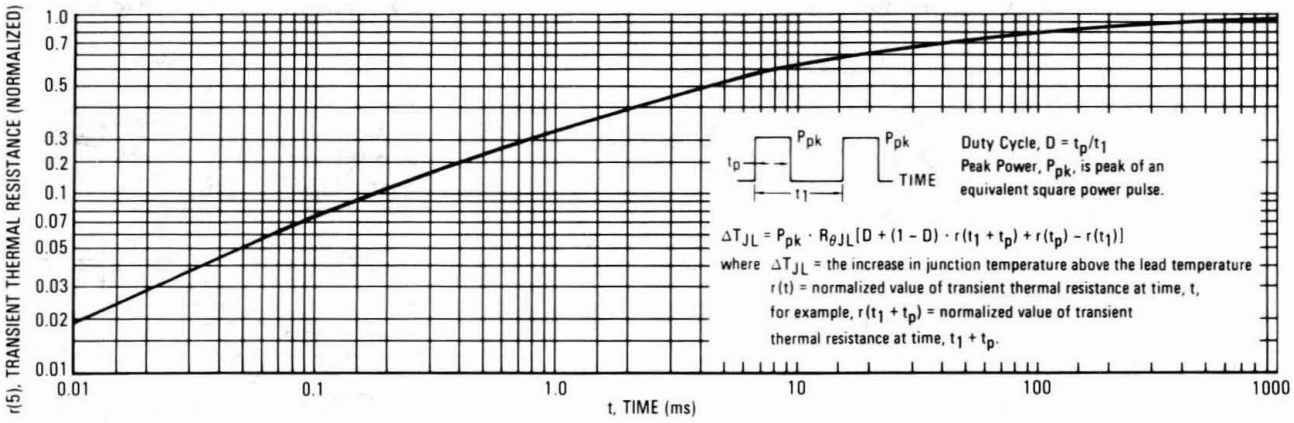

3

HIGH FREQUENCY OPERATION

Since current flow in a Schottky rectifier is the result of majority carrier conduction, it is not subject to junction diode forward and reverse recovery transients due to minority carrier injection and stored charge. Satisfactory circuit analysis work may be performed by using a model consisting of an ideal diode in parallel with a variable capacitance. (See Figure 7.)

Rectification efficiency measurements show that operation will be satisfactory up to several megahertz. For example, relative waveform rectification efficiency is approximately 70 per cent at 2.0 MHz, e.g., the ratio of dc power to RMS power in the load is 0.28 at this frequency, whereas perfect rectification would yield 0.406 for sine wave inputs. However, in contrast to ordinary junction diodes, the loss in waveform efficieny is not indicative of power loss; it is simply a result of reverse current flow through the diode capacitance, which lowers the dc output voltage.

FIGURE 7 — CAPACITANCE

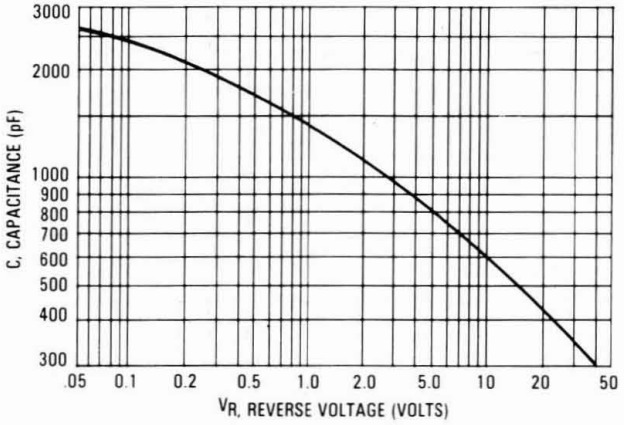

FIGURE 8 — TEST CIRCUIT FOR REPETITIVE REVERSE CURRENT

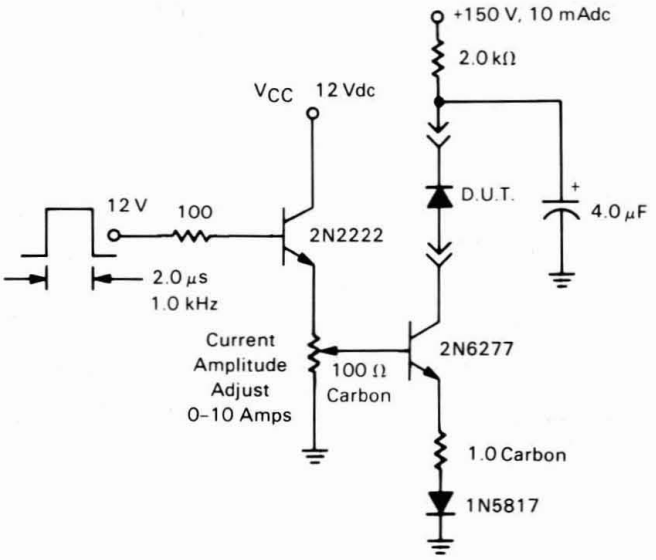

Product Preview

POWERTAP™ II SWITCHMODE™ Power Rectifier

MBRP20030CTL

Motorola Preferred Device

LOW V_F SCHOTTKY BARRIER RECTIFIER 200 AMPERES 30 VOLTS



CASE 357C–03 POWERTAP

The SWITCHMODE Power Rectifier uses the Schottky Barrier principle with a platinum barrier metal. This state–of–the–art device has the following features:

- Dual Diode Construction — May Be Paralleled for Higher Current Output
- Guardring for Stress Protection
- Low Forward Voltage Drop
- 150°C Operating Junction Temperature
- Recyclable Epoxy
- Guaranteed Reverse Avalanche Energy Capability
- Improved Mechanical Ratings

Mechanical Characteristics

- Case: Epoxy, Molded with metal heatsink base
- Weight: 80 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Top Terminal Torque: 25–40 lb–in max
- Base Plate Torques: See procedure given in the Package Outline Section
- Shipped 25 units per foam
- Marking: B20030L

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	30	Volts
Average Rectified Forward Current (At Rated V_R) T_C = +125°C	Per Leg Per Device	$I_{F(AV)}$	100 200	Amps
Peak Repetitive Forward Current (At Rated V_R, Square Wave, 20 kHz) T_C = +100°C		I_{FRM}	200	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	1500	Amps
Peak Repetitive Reverse Surge Current (2 μs, 1 kHz)		I_{RRM}	2	Amp
Storage Temperature		T_{stg}	–55 to +150	°C
Operating Junction Temperature		T_J	–55 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/μs

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case	$R_{\theta JC}$	0.45	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (2) (i_F = 200 Amps, T_C = +25°C) (i_F = 200 Amps, T_C = +25°C)	V_F	 0.52 0.60	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = +25°C)	I_R	5	mA

(1) Rating applies when surface mounted on the minimum pad size recommended.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 2

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MBRP20045CT
MBRP20060CT

Motorola Preferred Devices

Preliminary Data Sheet

POWERTAP II SWITCHMODE Power Rectifiers

SCHOTTKY BARRIER RECTIFIERS

200 AMPERES
45 to 60 VOLTS

. . . using the Schottky Barrier principle with a platinum barrier metal. These state-of-the-art devices have the following features:

- Dual Diode Construction — May Be Paralleled For Higher Current Output
- Guardring For Stress Protection
- Low Forward Voltage
- 175°C Operating Junction Temperature
- Guaranteed Reverse Avalanche

Mechanical Characteristics:

- Case: Epoxy, Molded with metal heatsink base
- Weight: 80 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Top Terminal Torque: 25 – 40 lb – in max
- Base Plate Torques: See procedure given in the Package Outline Section
- Shipped 25 units per foam
- Marking: B20045T, B20060T

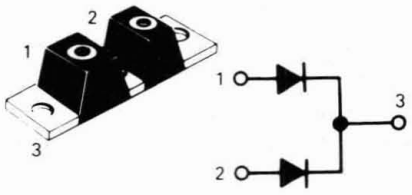

CASE 357C–03
POWERTAP II

3

MAXIMUM RATINGS

Rating	Symbol	MBRP20045CT	MBRP20060CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	60	Volts
Average Rectified Forward Current (Rated V_R) T_C = 140°C — Per Device Per Leg	$I_{F(AV)}$	200 100	200 100	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz), T_C = 140°C	I_{FRM}	200	200	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	1500	1500	Amps
Peak Repetitive Reverse Current, Per Leg (2.0 µs, 1.0 kHz) See Figure 6	I_{RRM}	2.0	2.0	Amps
Operating Junction Temperature	T_J	−55 to +175	−55 to +175	°C
Storage Temperature	T_{stg}	−55 to +150	−55 to +150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	10000	V/µs

THERMAL CHARACTERISTICS PER LEG

Thermal Resistance — Junction to Case	$R_{\theta JC}$	0.6	0.6	°C/W

ELECTRICAL CHARACTERISTICS PER LEG

Instantaneous Forward Voltage (1) (i_F = 200 Amp, T_J = 25°C) (i_F = 200 Amp, T_J = 25°C)	v_F	 0.89 0.78	 0.91 0.80	Volts
Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 125°C) (Rated dc Voltage, T_J = 25°C)	I_R	 50 0.5	 50 0.5	mA

(1) Pulse Test: Pulse Width = 300 µs, Duty Cycle ≤ 2.0%.

Rev 2

MBRP30045CT
MBRP30060CT

Motorola Preferred Devices

Preliminary Data Sheet

POWERTAP II
SWITCHMODE Power Rectifiers

. . . using the Schottky Barrier principle with a platinum barrier metal.
These state-of-the-art devices have the following features:

- Dual Diode Construction — May Be Paralleled For Higher Current Output
- Guardring For Stress Protection
- Low Forward Voltage
- 175°C Operating Junction Temperature
- Guaranteed Reverse Avalanche

Mechanical Characteristics:

- Case: Epoxy, Molded with metal heatsink base
- Weight: 80 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Top Terminal Torque: 25–40 lb–in max
- Base Plate Torques: See procedure given in the Package Outline Section
- Shipped 25 units per foam
- Marking: B30045T, B30060T

SCHOTTKY BARRIER RECTIFIERS 300 AMPERES 45 to 60 VOLTS



CASE 357C–03
POWERTAP II

3

MAXIMUM RATINGS

Rating		Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	 MBRP30045CT MBRP30060CT	V_{RRM} V_{RWM} V_R	 45 60	Volts
Average Rectified Forward Current (Rated V_R) T_C = 140°C	Per Device Per Leg	$I_{F(AV)}$	300 150	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz), T_C = 140°C		I_{FRM}	300	Amps
Nonrepetitive Peak Surge Current Per Leg (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	2500	Amps
Peak Repetitive Reverse Current, Per Leg (2.0 µs, 1.0 kHz) See Figure 6		I_{RRM}	2.0	Amps
Operating Junction Temperature		T_J	−55 to +175	°C
Storage Temperature		T_{stg}	−55 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/µs

THERMAL CHARACTERISTICS PER LEG

Thermal Resistance — Junction to Case		$R_{\theta JC}$	0.45	°C/W

ELECTRICAL CHARACTERISTICS PER LEG

Instantaneous Forward Voltage (1) (i_F = 150 Amp, T_J = 25°C) (i_F = 300 Amp, T_J = 25°C) (i_F = 150 Amp, T_J = 25°C) (i_F = 300 Amp, T_J = 25°C)	 MBRP30045CT MBRP30045CT MBRP30060CT MBRP30060CT	v_F	 0.70 0.82 0.79 0.89	Volts
Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 125°C) (Rated dc Voltage, T_J = 25°C)		I_R	 75 0.8	mA

(1) Pulse Test: Pulse Width = 300 µs, Duty Cycle ≤ 2.0%.

Rev 2

Product Preview

POWERTAP™ II SWITCHMODE™ Power Rectifier

MBRP60035CTL

Motorola Preferred Device

LOW V_F SCHOTTKY BARRIER RECTIFIER 600 AMPERES 35 VOLTS



CASE 357C-03 POWERTAP

The SWITCHMODE Power Rectifier uses the Schottky Barrier principle with a platinum barrier metal. This state-of-the-art device has the following features:

- Dual Diode Construction — May Be Paralleled for Higher Current Output
- Guardring for Stress Protection
- Low Forward Voltage Drop
- 150°C Operating Junction Temperature
- Recyclable Epoxy
- Guaranteed Reverse Avalanche Energy Capability
- Improved Mechanical Ratings

Mechanical Characteristics

- Case: Epoxy, Molded with metal heatsink base
- Weight: 80 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Top Terminal Torque: 25–40 lb–in max
- Base Plate Torques: See procedure given in the Package Outline Section
- Shipped 25 units per foam
- Marking: B60035L

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	35	Volts
Average Rectified Forward Current (At Rated V_R) T_C = +100°C	Per Leg Per Device	$I_{F(AV)}$	300 600	Amps
Peak Repetitive Forward Current (At Rated V_R, Square Wave, 20 kHz) T_C = +100°C		I_{FRM}	300	Amps
Non-repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	4000	Amps
Peak Repetitive Reverse Surge Current (2 μs, 1 kHz)		I_{RRM}	2	Amp
Storage Temperature		T_{stg}	−55 to +150	°C
Operating Junction Temperature		T_J	−55 to +150	°C
Voltage Rate of Change (Rated V_R)		dv/dt	10000	V/μs

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case	$R_{\theta JC}$	0.4	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (2) (i_F = 300 Amps, T_C = +25°C) (i_F = 300 Amps, T_C = +100°C)	V_F	 0.57 0.50	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = +25°C) (Rated dc Voltage, T_C = +100°C)	I_R	 10 250	mA

(1) Rating applies when surface mounted on the minimum pad size recommended.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 2

Advance Information

SWITCHMODE™ Schottky Power Rectifier

MBR240100V

SCHOTTKY BARRIER RECTIFIER 80 AMPERES 100 VOLTS



SOT–227B, STYLE 2

. . . using the Schottky Barrier principle with a platinum barrier metal. This state–of–the–art device has the following features:

- 100 V Blocking Voltage, Low Forward Voltage Drop
- Double Rectifier Diodes Construction: May Be Paralleled for Higher Current Output up to 80 Amp
- Guardring Construction Guarantees Stress Protection, High dV/dt Capability (10 kV/μs) and Reverse Avalanche
- Very Low Internal Parasitic Inductance (≤ 5.0 nH)
- Isolated Power Package (2500 Vac Insulation Rating)
- 175°C Operating Junction Temperature
- Ⓤ — UL Recognized, File #E69369

Mechanical Characteristics

- Case: Molded epoxy with isolated metal base
- Weight: 28 g (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Shipped 10 units per plastic tube
- Marking: MBR240100V

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	100	Volts
Average Rectified Forward Current — Per Diode (Rated V_C) @ T_C = 125°C — Per Device	$I_{F(AV)}$	40 80	Amps
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz) @ T_C = 90°C	I_{FRM}	120	Amps
Non Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	600	Amps
Peak Repetitive Reverse Current (2.0 μs, 1.0 kHz)	I_{RRM}	2.0	Amps
Operating Junction Temperature	T_J	−65 to 150	°C
Storage Temperature	T_{stg}	−65 to 150	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175	°C
Voltage Rate of Change	dV/dt	10000	V/μs
Package Insulation Rating (AC)	V_{isol}	2500	Volts

Rev 1

THERMAL CHARACTERISTICS

Rating		Symbol	Max	Unit
Thermal Resistance, Junction to Case	Per Diode Per Device	$R_{\theta JC}$	1.2 0.7	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Instantaneous Forward Voltage (1) @ i_F = 40 Amps, T_C = 25°C @ i_F = 40 Amps, T_C = 100°C @ i_F = 80 Amps, T_C = 100°C	v_F	 0.95 0.80 0.90	Volts
Instantaneous Reverse Current (1) @ Rated DC Voltage, T_C = 25°C @ Rated DC Voltage, T_C = 100°C	i_R	 0.1 20	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle < 2.0%

3

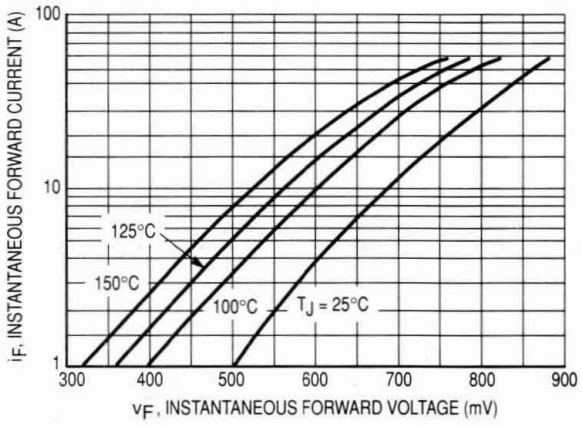

Figure 1. Typical Forward Voltage

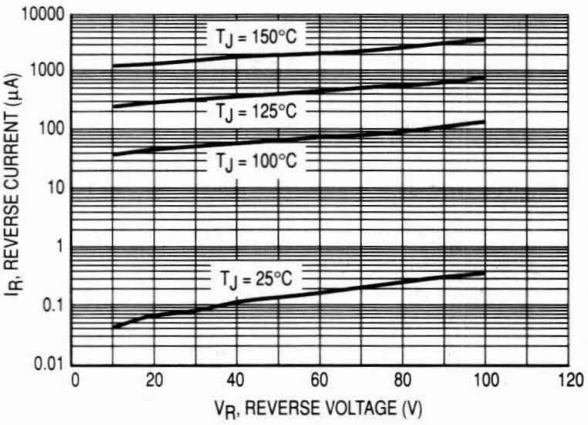

Figure 2. Typical Reverse Current

Advance Information

SWITCHMODE™ Schottky Power Rectifier

MBR25060V

. . . using the Schottky Barrier principle with a Platinum barrier metal. This state–of–the–art device has the following features:

- 60 V Blocking Voltage, Low Forward Voltage Drop
- Double Rectifier Diodes Construction: May Be Paralleled for Higher Current Output up to 100 Amp
- Guardring Construction Guarantees Stress Protection, High dV/dt Capability (10 kV/µs) and Reverse Avalanche
- Very Low Internal Parasitic Inductance (≤ 5.0 nH)
- Isolated Power Package (2500 Vac Insulation Rating)
- 150°C Operating Junction Temperature
- ℛ — UL Recognized, File #E69369

SCHOTTKY BARRIER RECTIFIER 100 AMPERES 60 VOLTS



SOT–227B STYLE 2

Mechanical Characteristics

- Case: Molded epoxy with isolated metal base
- Weight: 28 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Shipped 10 units per plastic tube
- Marking: MBR25060V

3

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	60	Volts
Average Rectified Forward Current — Per Diode (Rated V_R) @ T_C = 125°C — Per Device	$I_{F(AV)}$	50 100	Amps
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz) @ T_C = 90°C	I_{FRM}	150	Amps
Non Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	800	Amps
Peak Repetitive Reverse Current (2.0 µs, 1.0 kHz)	I_{RRM}	2.0	Amps
Operating Junction Temperature	T_J	–65 to 150	°C
Storage Temperature	T_{stg}	–65 to 150	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175	°C
Voltage Rate of Change	dV/dt	10000	V/µs
Package Insulation Rating (AC)	V_{isol}	2500	Volts

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	Per Diode Per Device	$R_{\theta JC}$	1.2 0.7	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Instantaneous Forward Voltage (1) @ i_F = 50 Amps, T_C = 25°C @ i_F = 50 Amps, T_C = 100°C	v_F	0.65 0.60	Volts
Instantaneous Reverse Current (1) @ Rated DC Voltage, T_C = 25°C @ Rated DC Voltage, T_C = 100°C	i_R	0.5 20	mA

(1) Pulse Test: Pulse Width = 300 µs, Duty Cycle < 2.0%

This document contains information on a new product. Specifications and information herein are subject to change without notice.

Rev 1

MBR28045V

Advance Information

SWITCHMODE™ Schottky Power Rectifier

SCHOTTKY BARRIER RECTIFIER 160 AMPERES 45 VOLTS



SOT–227B, STYLE 2

. . . using the Schottky Barrier principle with a platinum barrier metal. This state–of–the–art device has the following features:

- 45 V Blocking Voltage, Low Forward Voltage Drop
- Double Rectifier Diodes Construction: May Be Paralleled for Higher Current Output up to 160 Amp
- Guardring Construction Guarantees Stress Protection, High dV/dt Capability (10 kV/μs) and Reverse Avalanche
- Very Low Internal Parasitic Inductance (≤ 5.0 nH)
- Isolated Power Package (2500 Vac Insulation Rating)
- 175°C Operating Junction Temperature
- ℛ — UL Recognized, File #E69369

Mechanical Characteristics

- Case: Molded epoxy with isolated metal base
- Weight: 28 g (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Shipped 10 units per plastic tube
- Marking: MBR28045V

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	Volts
Average Rectified Forward Current — Per Diode (Rated V_R) @ T_C = 125°C — Per Device	$I_{F(AV)}$	80 160	Amps
Peak Repetitive Forward Current, Per Diode (Rated V_R, Square Wave, 20 kHz) @ T_C = 90°C	I_{FRM}	145	Amps
Non Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	900	Amps
Peak Repetitive Reverse Current (2.0 μs, 1.0 kHz)	I_{RRM}	2.0	Amps
Operating Junction Temperature	T_J	−65 to 150	°C
Storage Temperature	T_{stg}	−65 to 150	°C
Peak Surge Junction Temperature (Forward Current Applied)	$T_{J(pk)}$	175	°C
Voltage Rate of Change	dV/dt	10000	V/μs
Package Insulation Rating (AC)	V_{isol}	2500	Volts

Rev 1

THERMAL CHARACTERISTICS

Rating		Symbol	Max	Unit
Thermal Resistance, Junction to Case	Per Diode Per Device	$R_{\theta JC}$	1.1 0.6	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Instantaneous Forward Voltage (1) @ i_F = 80 Amps, T_C = 25°C @ i_F = 80 Amps, T_C = 150°C @ i_F = 160 Amps, T_C = 25°C	v_F	 0.8 0.69 1.0	Volts
Instantaneous Reverse Current (1) @ Rated DC Voltage, T_C = 25°C @ Rated DC Voltage, T_C = 100°C	i_R	 1.0 80	mA

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle < 2.0%

3

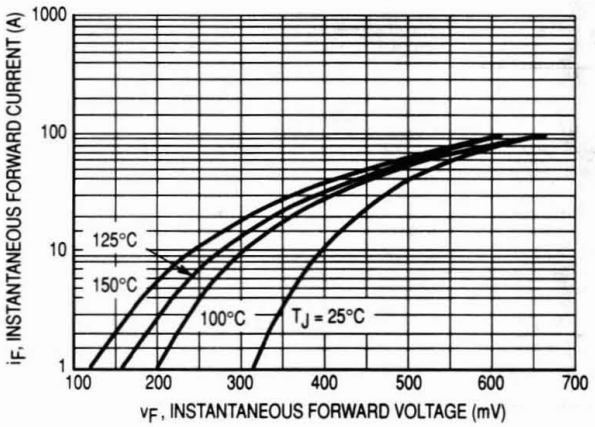

Figure 1. Typical Forward Voltage

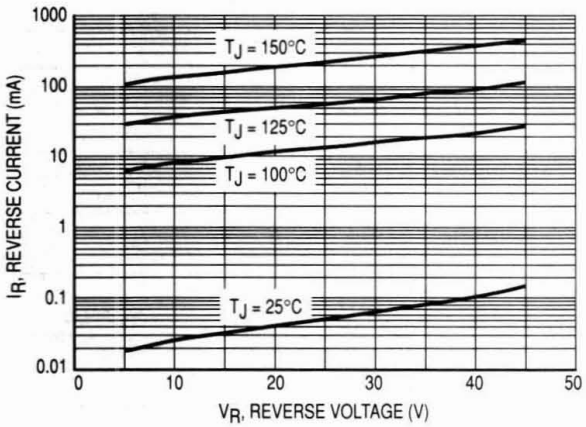

Figure 2. Typical Reverse Current

Switchmode™ Power Rectifier

MBRB3030CT

Motorola Preferred Device

SCHOTTKY BARRIER RECTIFIER 30 AMPERES 30 VOLTS

Using the Schottky Barrier principle with a proprietary barrier metal. These state–of–the–art devices have the following features:

- Guardring for Stress Protection
- Maximum Die Size
- 150°C Operating Junction Temperature
- Short Heat Sink Tab Manufactured – Not Sheared

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 Units per Plastic Tube
- Available in 24 mm Tape and Reel, 800 Units per 13" Reel by Adding a "T4" Suffix to the Part Number
- Marking: B3030



CASE 418B–02
D^2PAK

3

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30	V
Average Rectified Forward Current (At Rated V_R) T_C = +134°C) Per Device Per Leg	$I_{F(AV)}$	30 15	A
Peak Repetitive Forward Current, Per Leg (At Rated V_R, Square Wave, 20 kHz) T_C = +137°C	I_{FRM}	30	A
Nonrepetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I_{FSM}	200	A
Peak Repetitive Reverse Surge Current (2.0 µs, 1.0 kHz)	I_{RRM}	2.0	A
Storage Temperature	T_{stg}	– 55 to +150	°C
Operating Junction Temperature	T_J	– 55 to +150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/µs
Reverse Energy (Unclamped Inductive Surge) (Inductance = 3 mH), T_C = 25°C	W	100	mJ

THERMAL CHARACTERISTICS

Thermal Resistance – Junction to Case	$R_{\theta JC}$	1.0	°C/W
Thermal Resistance – Junction to Ambient (1)	$R_{\theta JA}$	50	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (2), per Leg (I_F = 15 A, T_C = + 25°C) (I_F = 15 A, T_C = +150°C) (I_F = 30 A, T_C = + 25°C) (I_F = 30 A, T_C = +150°C)	V_F	 0.54 0.47 0.67 0.66	V
Maximum Instantaneous Reverse Current (2), per Leg (Rated DC Voltage, T_C = + 25°C) (Reverse Voltage = 10 V, T_C = +150°C) (Rate DC Voltage, T_C = +150°C)	I_R	 0.6 46 145	mA

1. When mounted using minimum recommended pad size on FR–4 board.
2. Pulse Test: Pulse Width = 300 µs, Duty Cycle ≤ 2.0%

Preferred devices are Motorola recommended choices for future use and best overall value.

Electrical Characteristics

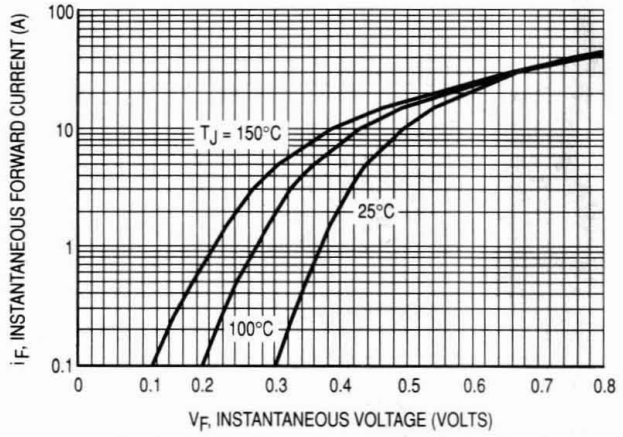

Figure 1. Maximum Forward Voltage, Per Leg

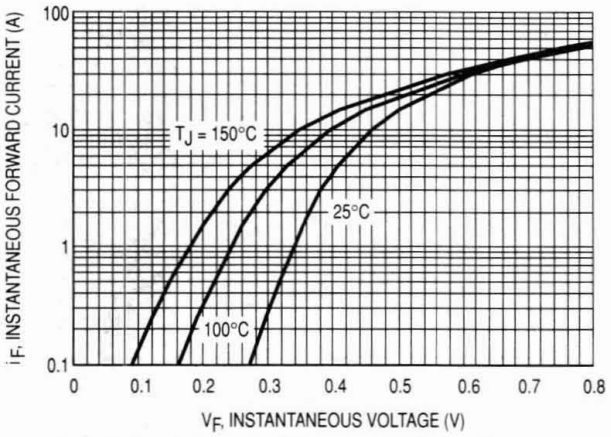

Figure 2. Typical Forward Voltage, Per Leg

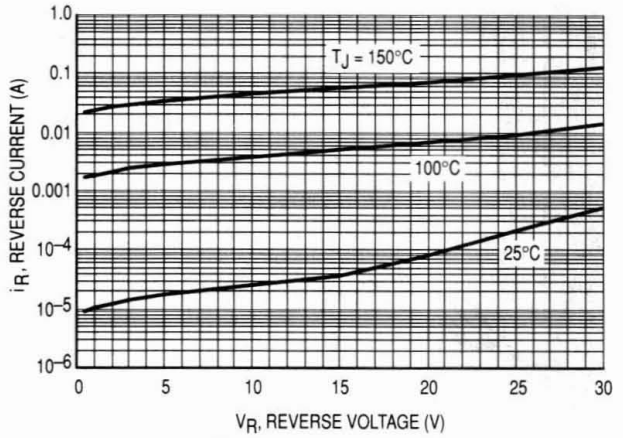

Figure 3. Maximum Reverse Current, Per Leg

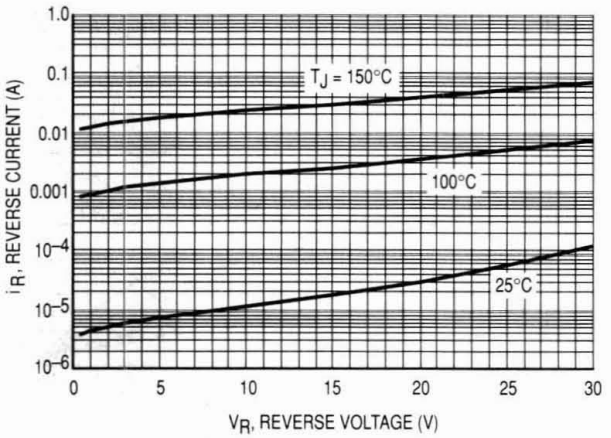

Figure 4. Typical Reverse Current, Per Leg

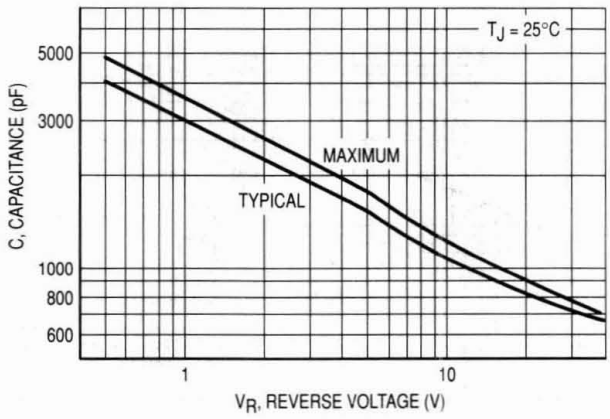

Figure 5. Capacitance

Typical Characteristics

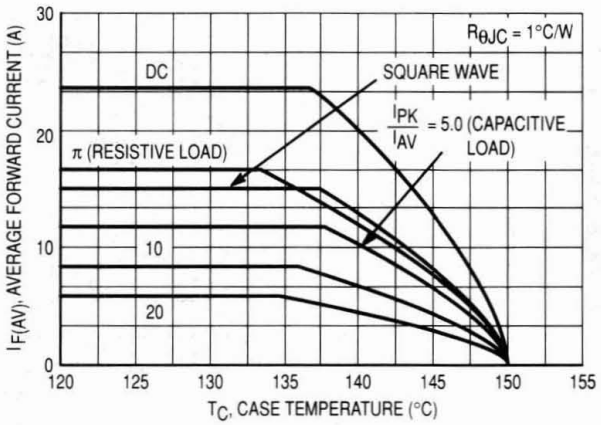

Figure 6. Current Derating, Infinite Heatsink

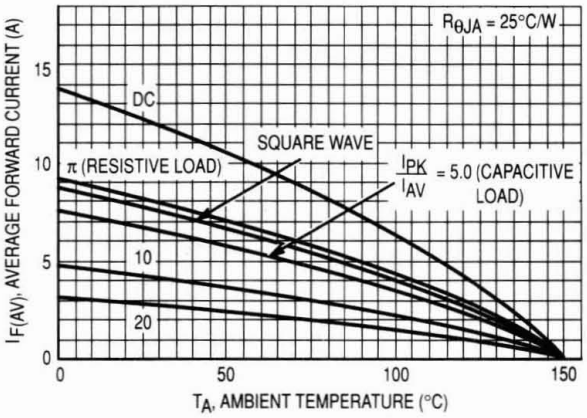

Figure 7. Current Derating

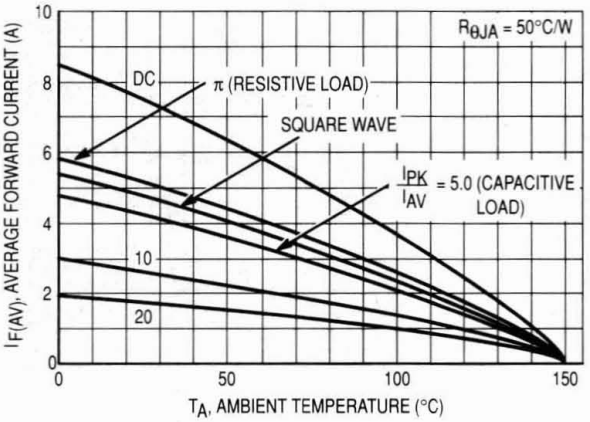

Figure 8. Current Derating, Free Air

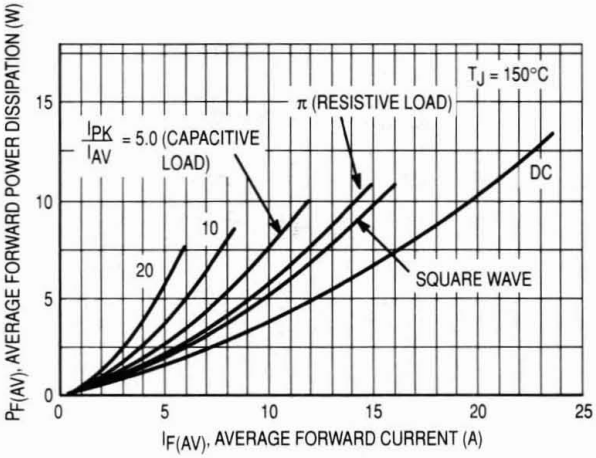

Figure 9. Forward Power Dissipation

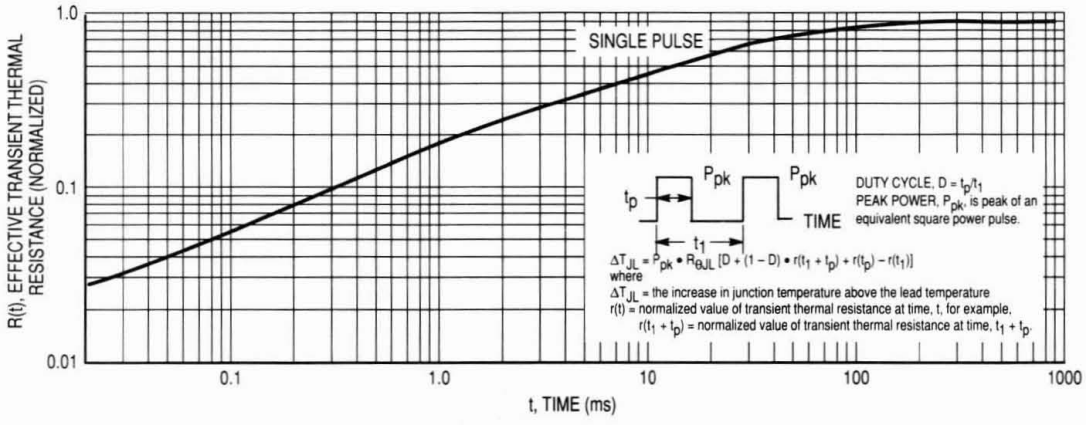

Figure 10. Thermal Response

MBRB4030

Motorola Preferred Device

Switchmode Power Rectifier

Using the Schottky Barrier principle with a proprietary barrier metal. These state–of–the–art devices have the following features:

- Guardring for Stress Protection
- Maximum Die Size
- 150°C Operating Junction Temperature
- Short Heat Sink Tab Manufactured – Not Sheared

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 Grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads Readily Solderable
- Shipped 50 Units per Plastic Tube
- Available in 24 mm Tape and Reel, 800 Units per 13″ Reel by Adding a "T4" Suffix to the Part Number
- Marking: B4030

SCHOTTKY BARRIER RECTIFIER 40 AMPERES 30 VOLTS



CASE 418B–02
D^2PAK

3

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30	V
Average Rectified Forward Current (At Rated V_R) T_C = +115°C (1)	$I_{F(AV)}$	40	A
Peak Repetitive Forward Current (At Rated V_R, Square Wave, 20 kHz) T_C = + 112°C	I_{FRM}	80	A
Nonrepetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I_{FSM}	300	A
Peak Repetitive Reverse Surge Current (2.0 μs, 1.0 kHz)	I_{RRM}	2.0	A
Storage Temperature	T_{stg}	– 65 to +150	°C
Operating Junction Temperature	T_J	– 65 to +150	°C
Voltage Rate of Change (Rated V_R)	dv/dt	10,000	V/μs
Reverse Energy (Unclamped Inductive Surge) (Inductance = 3 mH), T_C = 25°C	W	600	mJ

THERMAL CHARACTERISTICS

Thermal Resistance – Junction to Case	$R_{\theta JC}$	1.0	°C/W
Thermal Resistance – Junction to Ambient (2)	$R_{\theta JA}$	50	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1 and 3), per Device (I_F = 20 A, T_C = + 25°C) (I_F = 20 A, T_C = +150°C) (I_F = 40 A, T_C = + 25°C) (I_F = 40 A, T_C = +150°C)	V_F	 0.46 0.34 0.55 0.45	V
Maximum Instantaneous Reverse Current (3), per Device (Rated DC Voltage, T_C = + 25°C) (Rated DC Voltage, T_C = +125°C)	I_R	 0.35 150	mA

NOTES:
1. Rating applies when pins 1 and 3 are connected.
2. Rating applies when surface mounted on the miniumum pad size recommended.
3. Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Preferred devices are Motorola recommended choices for future use and best overall value.

Electrical Characteristics

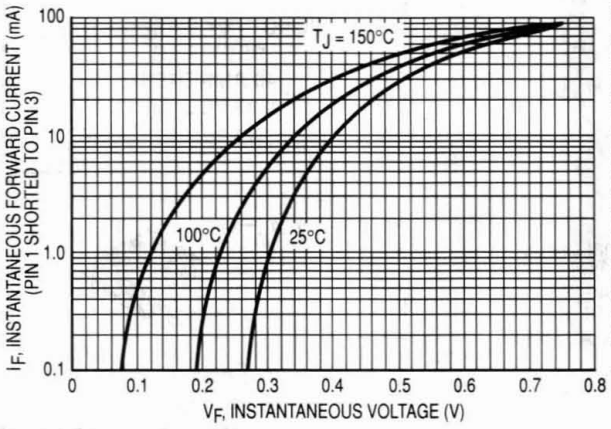

Figure 1. Maximum Forward Voltage

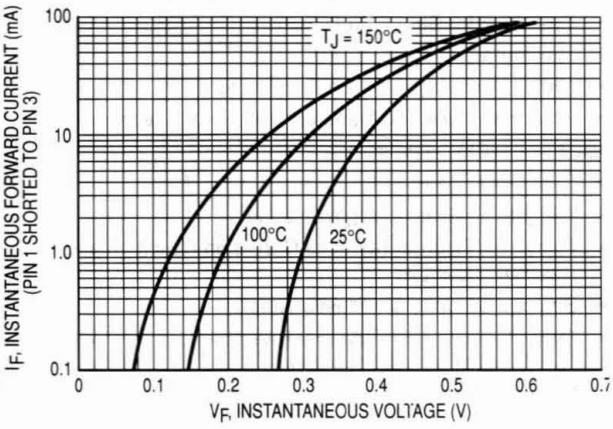

Figure 2. Typical Forward Voltage

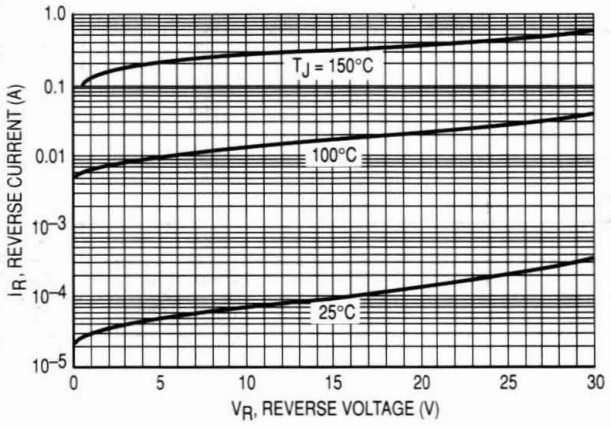

Figure 3. Maximum Reverse Current

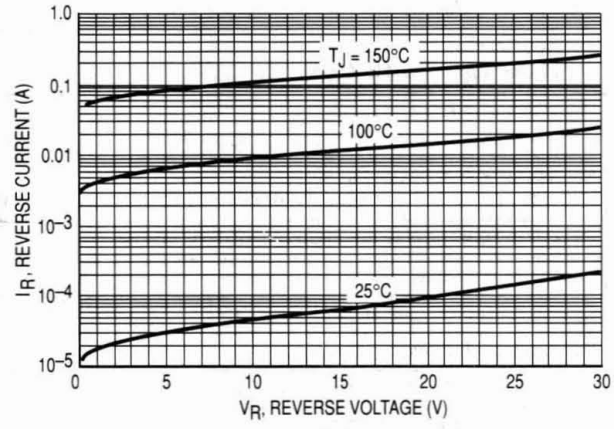

Figure 4. Typical Reverse Current

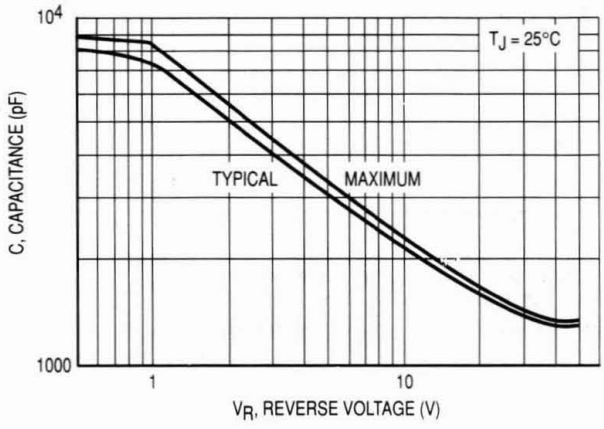

Figure 5. Maximum and Typical Capacitance

Electrical Characteristics

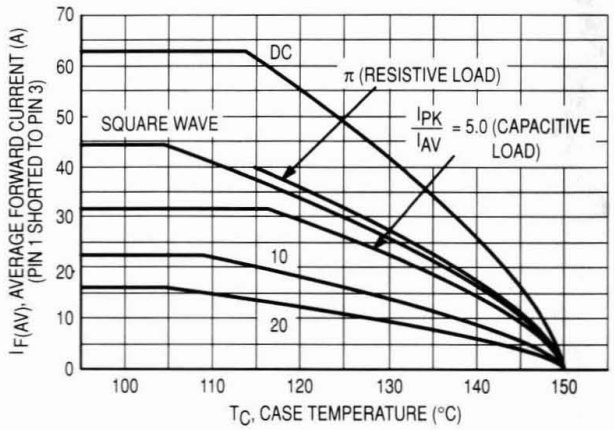

Figure 6. Current Derating, Infinite Heatsink

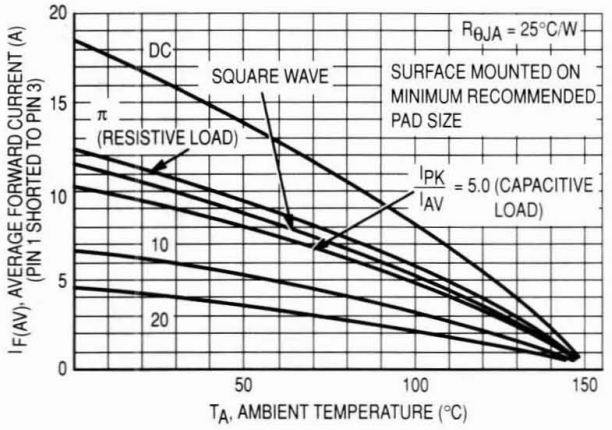

Figure 7. Current Derating

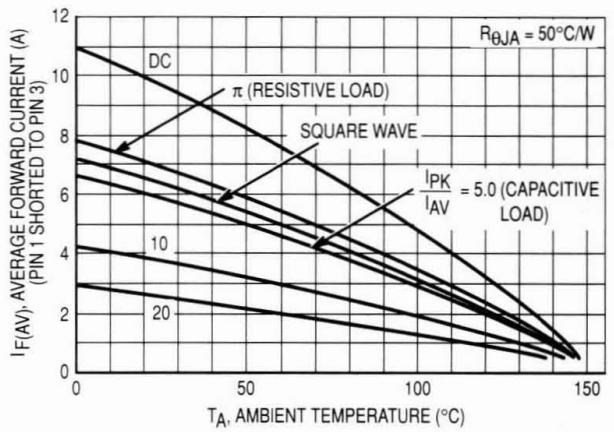

Figure 8. Current Derating, Free Air

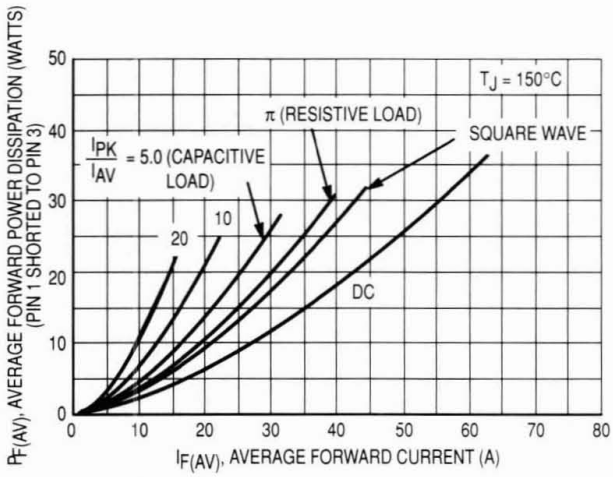

Figure 9. Forward Power Dissipation

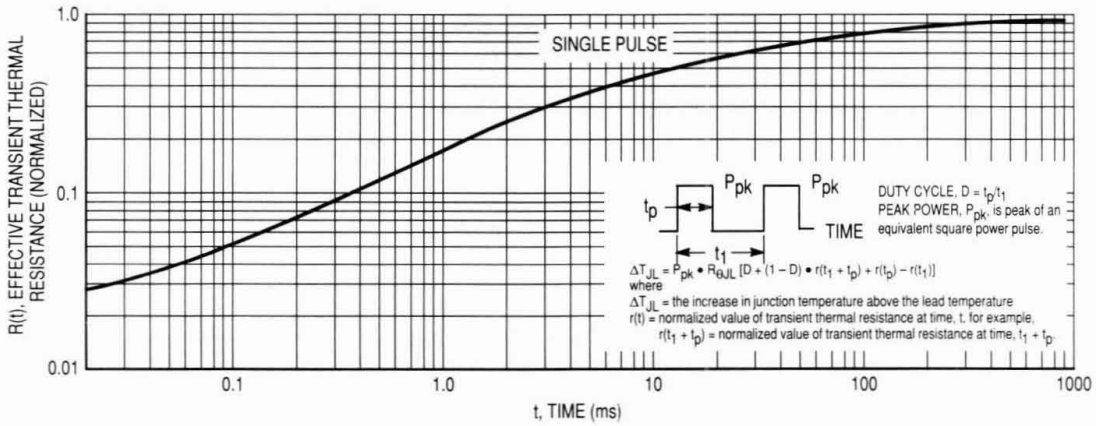

Figure 10. Thermal Response

Section 4

Ultrafast Data Sheets

4

Surface Mount Ultrafast Power Rectifiers

MURS120T3
MURS160T3

Motorola Preferred Devices

ULTRAFAST RECTIFIERS
1.0 AMPERE
200–600 VOLTS

CASE 403A-03

Ideally suited for high voltage, high frequency rectification, or as free wheeling and protection diodes in surface mount applications where compact size and weight are critical to the system.

- Small Compact Surface Mountable Package with J-Bend Leads
- Rectangular Package for Automated Handling
- High Temperature Glass Passivated Junction
- Low Forward Voltage Drop (0.71 to 1.05 Volts Max @ 1.0 A, T_J = 150°C)

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 95 mg (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped in 12 mm Tape and Reel, 2500 units per reel
- Polarity: Notch in Plastic Body Indicates Cathode Lead
- Marking: U1D, U1J

4

MAXIMUM RATINGS

Rating	Symbol	MURS 120T3	MURS 160T3	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	600	Volts
Average Rectified Forward Current	$I_{F(AV)}$	1.0 @ T_L = 155°C 2.0 @ T_L = 145°C	1.0 @ T_L = 150°C 2.0 @ T_L = 125°C	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	40	35	Amps
Operating Junction Temperature	T_J	−65 to +175		°C

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Lead (T_L = 25°C)	$R_{\theta JL}$	13		°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 1.0 A, T_J = 25°C) (i_F = 1.0 A, T_J = 150°C)	v_F	 0.875 0.71	 1.25 1.05	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 25°C) (Rated dc Voltage, T_J = 150°C)	i_R	 2.0 50	 5.0 150	μA
Maximum Reverse Recovery Time (i_F = 1.0 A, di/dt = 50 A/μs) (i_F = 0.5 A, i_R = 1.0 A, I_R to 0.25 A)	t_{rr}	 35 25	 75 50	ns
Maximum Forward Recovery Time (i_F = 1.0 A, di/dt = 100 A/μs, Rec. to 1.0 V)	t_{fr}	25	50	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 2

MURS120T3

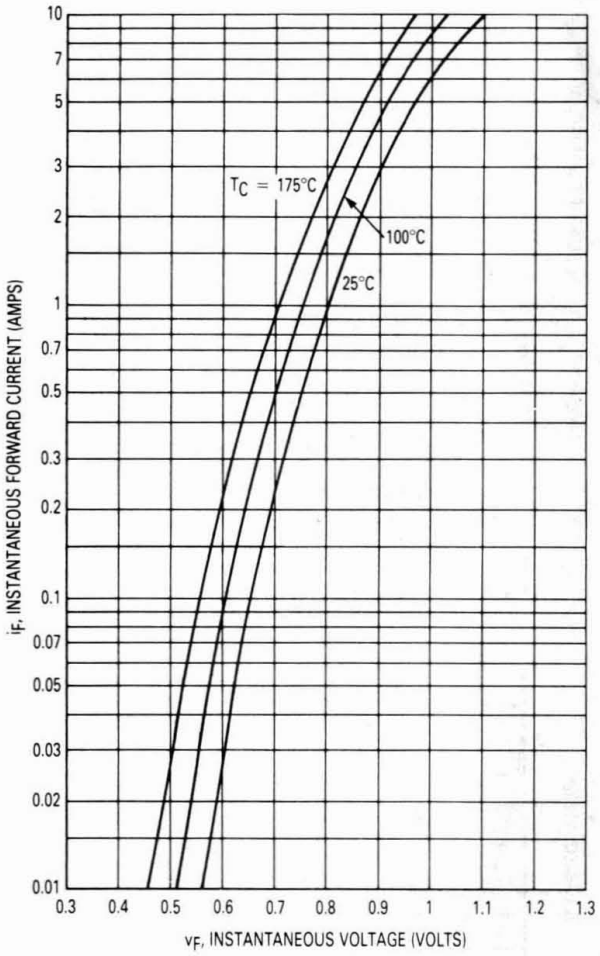

Figure 1. Typical Forward Voltage

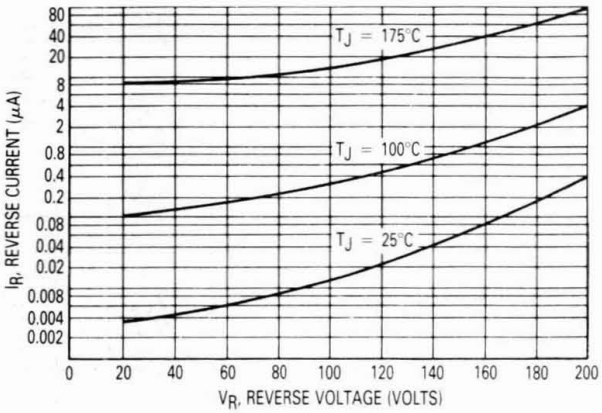

Figure 2. Typical Reverse Current*

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if applied V_R is sufficiently below rated V_R.

4

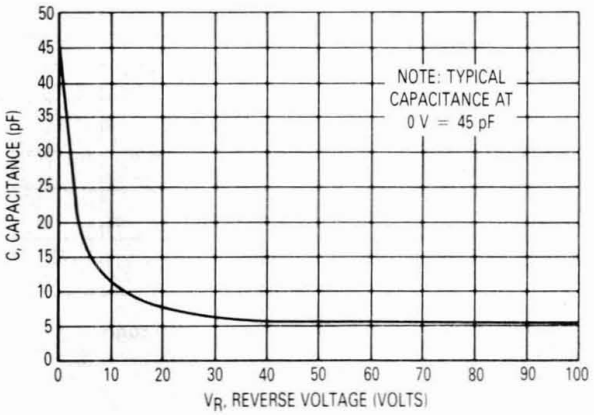

Figure 3. Typical Capacitance

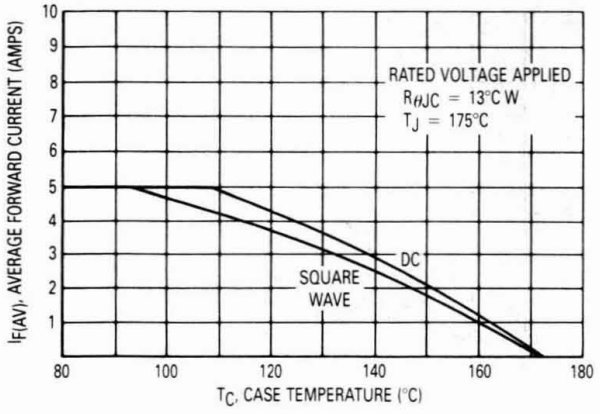

Figure 4. Current Derating, Case

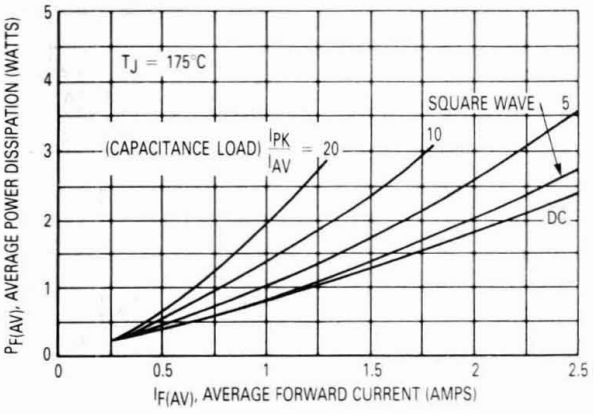

Figure 5. Power Dissipation

MURS160T3

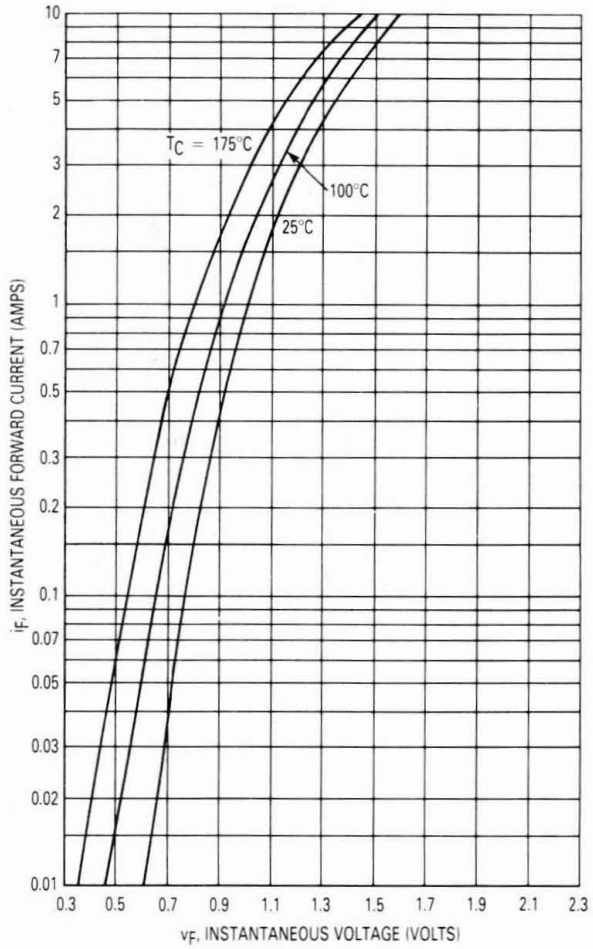

Figure 6. Typical Forward Voltage

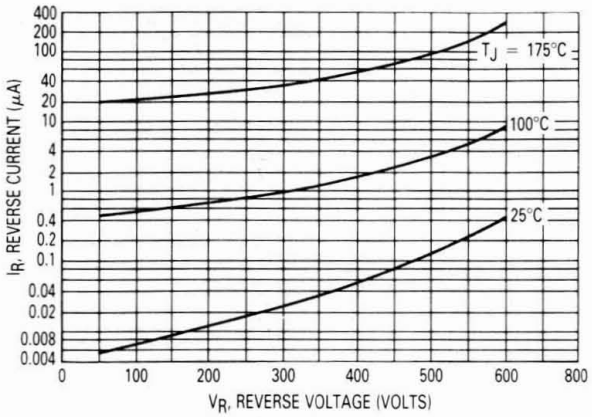

Figure 7. Typical Reverse Current*

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if applied V_R is sufficiently below rated V_R.

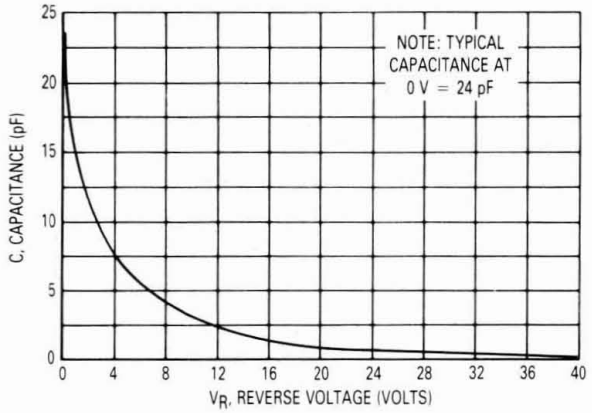

Figure 8. Typical Capacitance

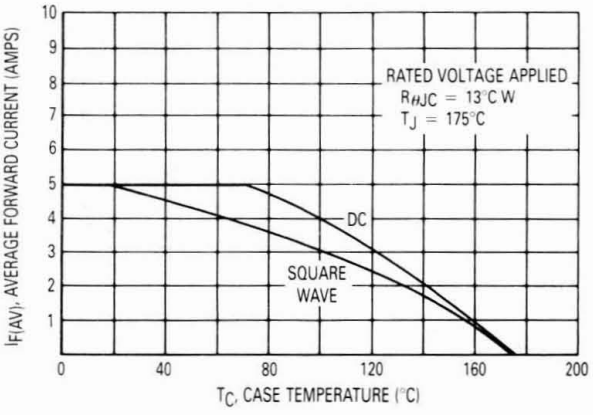

Figure 9. Current Derating, Case

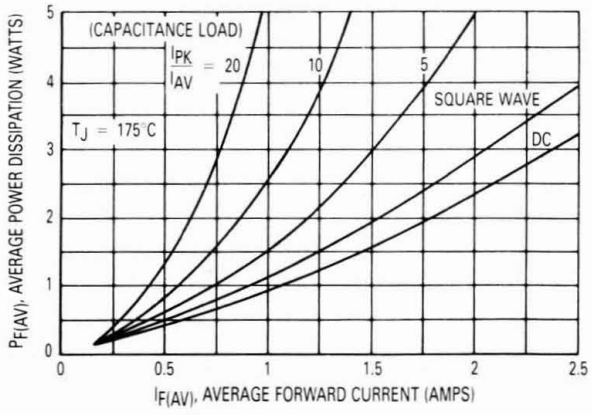

Figure 10. Power Dissipation

MURS320T3
MURS360T3

Motorola Preferred Devices

Surface Mount
Ultrafast Power Rectifiers

. . . employing state-of-the-art epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for high voltage, high frequency rectification, or as free wheeling and protection diodes, in surface mount applications where compact size and weight are critical to the system.

- Small Compact Surface Mountable Package with J-Bend Leads
- Rectangular Package for Automated Handling
- Highly Stable Oxide Passivated Junction
- Low Forward Voltage Drop (0.71 to 1.05 Volts Max @ 3.0 A, T_J = 150°C)

ULTRAFAST RECTIFIERS
3.0 AMPERES
200–600 VOLTS

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 217 mg (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped in 16 mm Tape and Reel, 2500 units per reel
- Polarity: Notch in Plastic Body Indicates Cathode Lead
- Marking: U3D, U3J

CASE 403-03

4

MAXIMUM RATINGS

Rating	Symbol	MURS 320T3	MURS 360T3	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	600	Volts
Average Rectified Forward Current	$I_{F(AV)}$	3.0 @ T_L = 140°C 4.0 @ T_L = 130°C	3.0 @ T_L = 130°C 4.0 @ T_L = 115°C	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	75		Amps
Operating Junction Temperature	T_J	−65 to +175		°C

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Lead	$R_{\theta JL}$	11		°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 3.0 A, T_J = 25°C) (i_F = 4.0 A, T_J = 25°C) (i_F = 3.0 A, T_J = 150°C)	v_F	 0.875 0.89 0.71	 1.25 1.28 1.05	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 25°C) (Rated dc Voltage, T_J = 150°C)	i_R	 5.0 15	 10 250	μA
Maximum Reverse Recovery Time (I_F = 1.0 A, di/dt = 50 A/μs) (I_F = 0.5 A, i_R = 1.0 A, I_{REC} to 0.25 A)	t_{rr}	 35 25	 75 50	ns
Maximum Forward Recovery Time (I_F = 1.0 A, di/dt = 100 A/μs, Recovery to 1.0 V)	t_{fr}	25	50	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 2

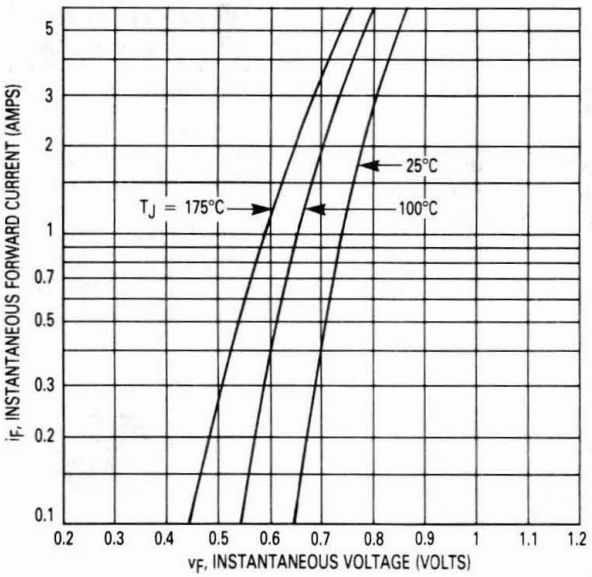

Figure 1. Typical Forward Voltage

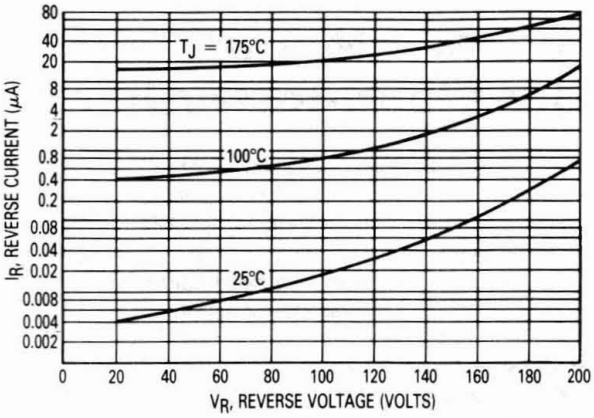

Figure 2. Typical Reverse Current*

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R.

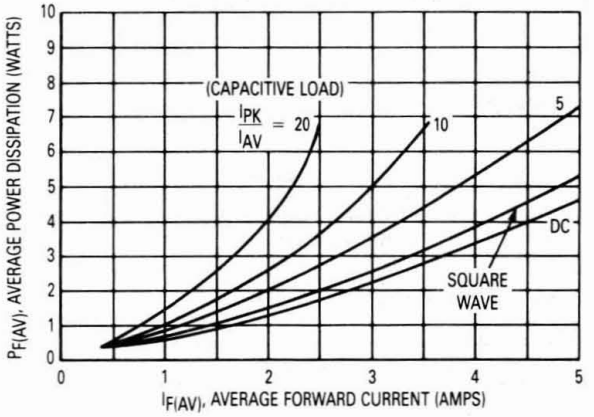

Figure 3. Power Dissipation

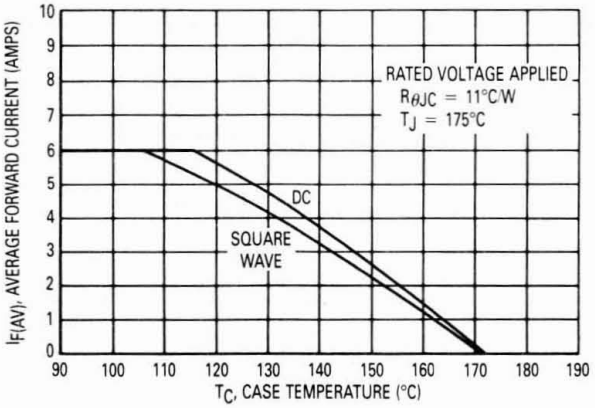

Figure 4. Current Derating (Case)

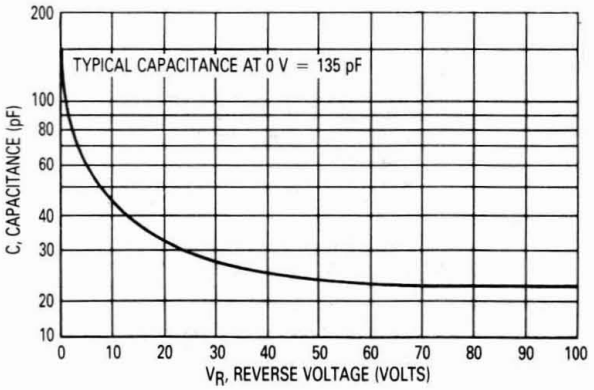

Figure 5. Typical Capacitance

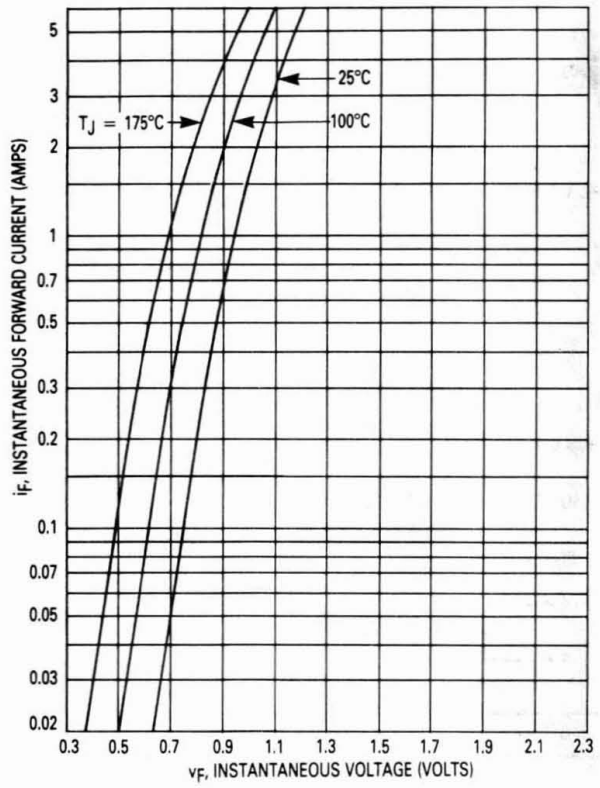

Figure 6. Typical Forward Voltage

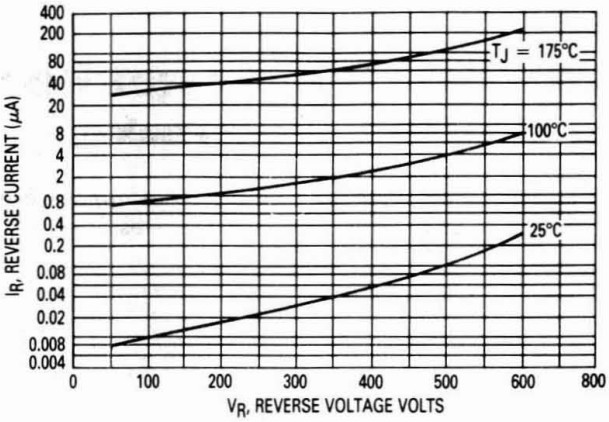

Figure 7. Typical Reverse Current*

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if V_R is sufficiently below rated V_R.

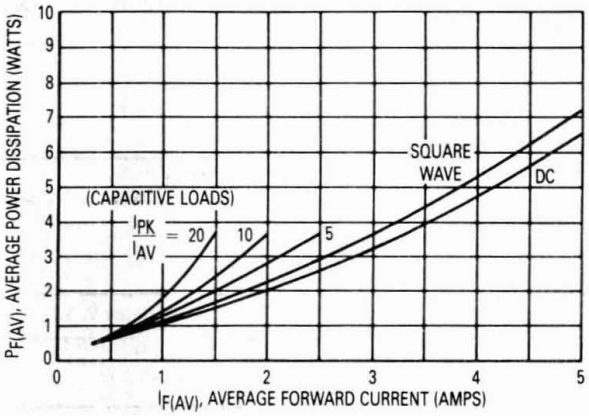

Figure 8. Power Dissipation

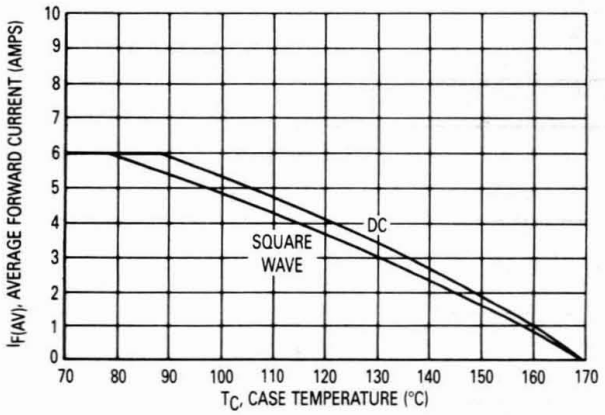

Figure 9. Current Derating (Case)

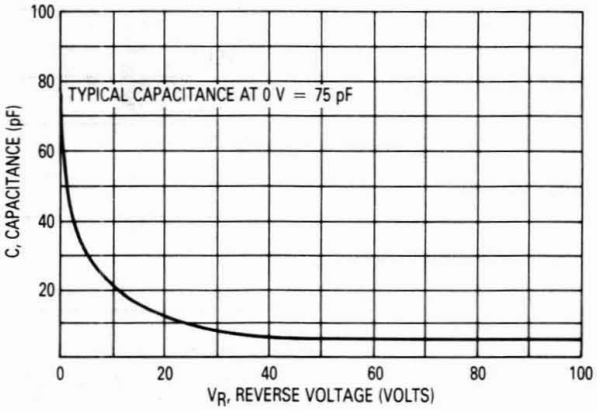

Figure 10. Typical Capacitance

SWITCHMODE Power Rectifiers

DPAK Surface Mount Package

MURD320

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 Nanosecond Recovery Time
- Low Forward Voltage Drop
- Low Leakage

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 75 units per plastic tube
- Available in 16 mm Tape and Reel, 2500 units per reel, by adding a "T4" suffix to the part number
- Marking: U320

MURD320 is a Motorola Preferred Device

ULTRAFAST RECTIFIERS 3 AMPERES 200 VOLTS



CASE 369A-13 DPAK



4

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Current (T_C = 158°C, Rated V_R)	$I_{F(AV)}$	3	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz, T_C = 158°C)	I_{FRM}	6	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, 60 Hz)	I_{FSM}	75	Amps
Operating Junction and Storage Temperature	T_J, T_{stg}	−65 to +175	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case Junction to Ambient (1)	$R_{\theta JC}$ $R_{\theta JA}$	6 80	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage Drop (2) (i_F = 3 Amps, T_J = 25°C) (i_F = 3 Amps, T_J = 125°C)	v_F	 0.95 0.75	Volts
Maximum Instantaneous Reverse Current (2) (T_J = 25°C, Rated dc Voltage) (T_J = 125°C, Rated dc Voltage)	i_R	 5 500	μA
Maximum Reverse Recovery Time (I_F = 1 Amp, di/dt = 50 Amps/μs, V_R = 30 V, T_J = 25°C) (I_F = 0.5 Amp, i_R = 1 Amp, I_{REC} = 0.25 A, V_R = 30 V, T_J = 25°C)	t_{rr}	 35 25	ns

(1) Rating applies when surface mounted on the minimum pad sizes recommended.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Rev 1

TYPICAL CHARACTERISTICS

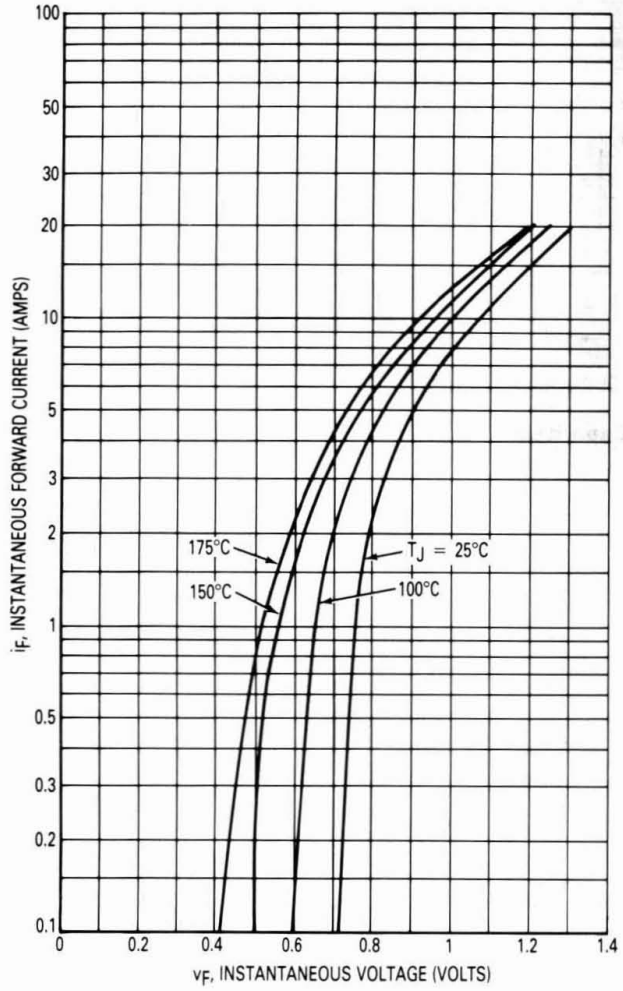

Figure 1. Typical Forward Voltage

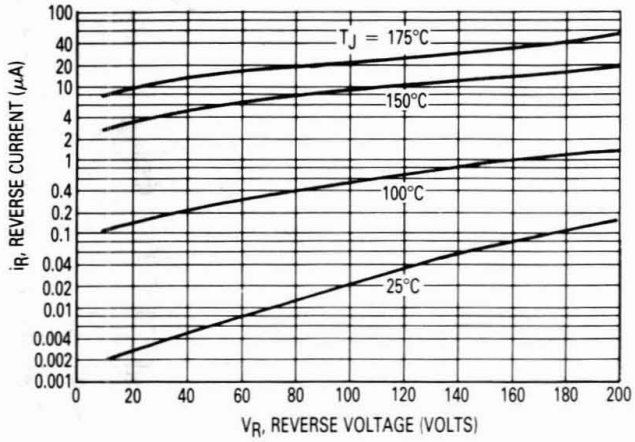

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these curves if V_R is sufficient below rated V_R.

Figure 2. Typical Reverse Current*

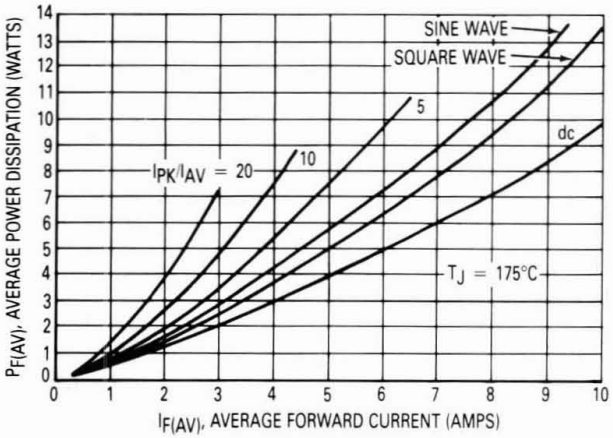

Figure 3. Average Power Dissipation

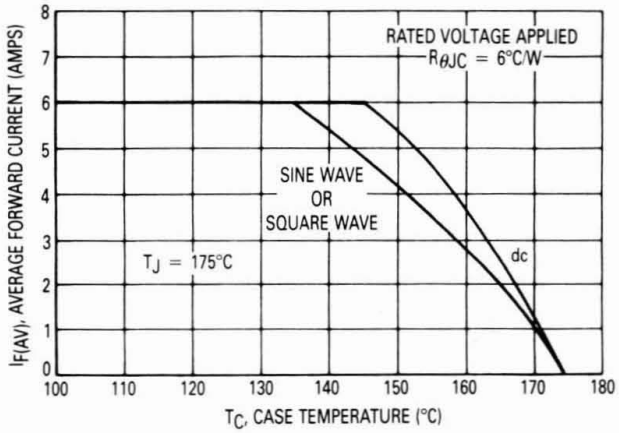

Figure 4. Current Derating, Case

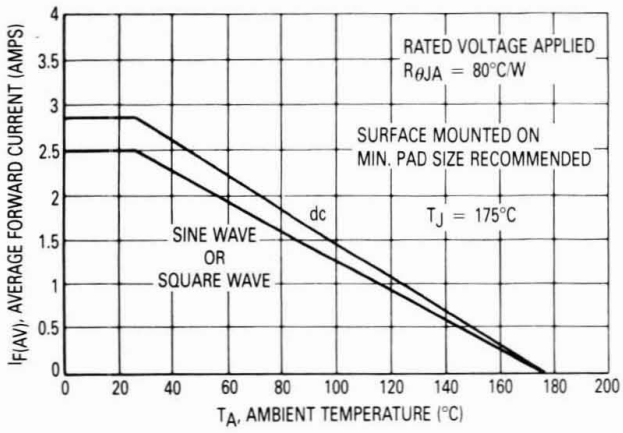

Figure 5. Current Derating, Ambient

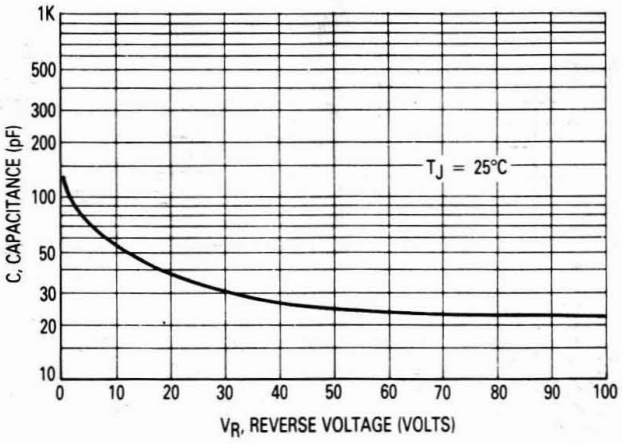

Figure 6. Typical Capacitance

4

SWITCHMODE Power Rectifiers
DPAK Surface Mount Package

MURD620CT

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 Nanosecond Recovery Time
- Low Forward Voltage Drop
- Low Leakage

MURD620CT is a Motorola Preferred Device

ULTRAFAST RECTIFIERS 6 AMPERES 200 VOLTS

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 75 units per plastic tube
- Available in 16 mm Tape and Reel, 2500 units per reel, by adding a "T4" suffix to the part number
- Marking: U620T



CASE 369A-13 PLASTIC

4

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Voltage (Per Diode / Per Device) (T_C = 140°C, Rated V_R)	$I_{F(AV)}$	3 6	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz, T_C = 145°C) Per Diode	I_F	6	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, 60 Hz)	I_{FSM}	50	Amps
Operating Junction and Storage Temperature	T_J, T_{stg}	−65 to +175	°C

THERMAL CHARACTERISTICS PER DIODE

Thermal Resistance, Junction to Case Junction to Ambient (1)	$R_{\theta JC}$ $R_{\theta JA}$	9 80	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Maximum Instantaneous Forward Voltage Drop (2) i_F = 3 Amps, T_C = 25°C i_F = 3 Amps, T_C = 125°C i_F = 6 Amps, T_C = 25°C i_F = 6 Amps, T_C = 125°C	v_F	 1 0.96 1.2 1.13	Volts
Maximum Instantaneous Reverse Current (2) (T_J = 25°C, Rated dc Voltage) (T_J = 125°C, Rated dc Voltage)	i_R	 5 250	μA
Maximum Reverse Recovery Time (I_F = 1 Amp, di/dt = 50 Amps/μs, V_R = 30 V, T_J = 25°C) (I_F = 0.5 Amp, i_R = 1 Amp, I_{REC} = 0.25 A, V_R = 30 V, T_J = 25°C)	t_{rr}	 35 25	ns

(1) Rating applies when surface mounted on the minimum pad sizes recommended.
(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Rev 1

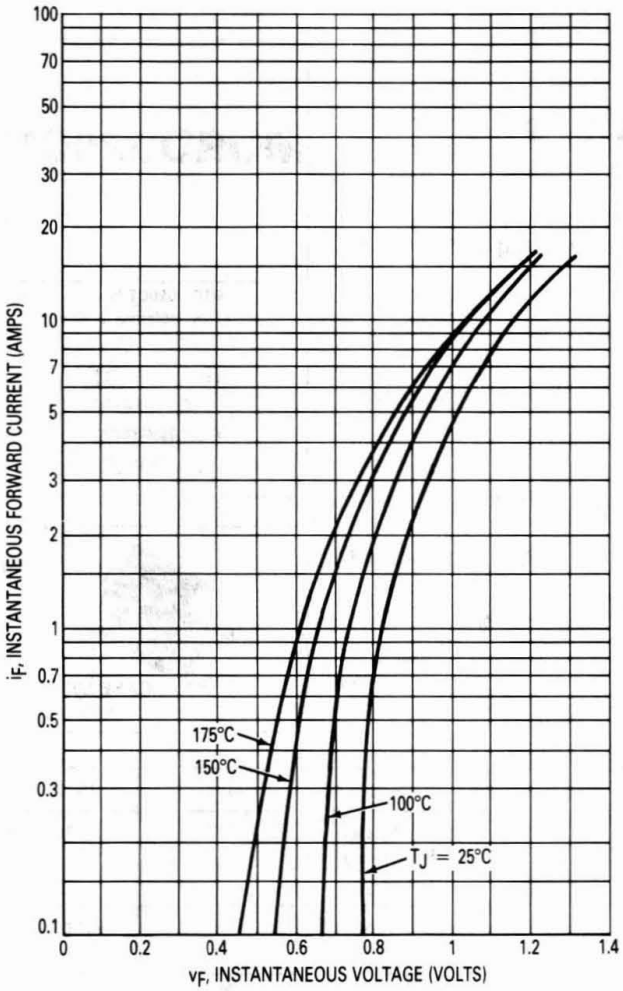

Figure 1. Typical Forward Voltage (Per Leg)

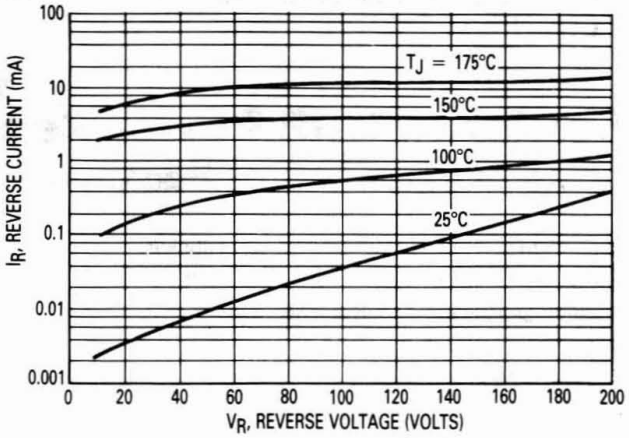

*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these curves if V_R is sufficient below rated V_R.

Figure 2. Typical Leakage Current* (Per Leg)

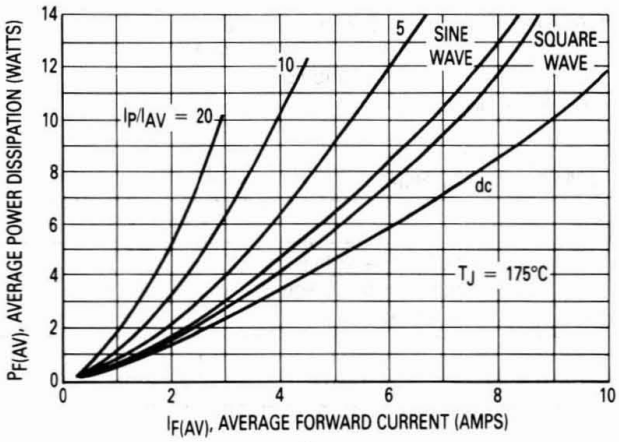

Figure 3. Average Power Dissipation (Per Leg)

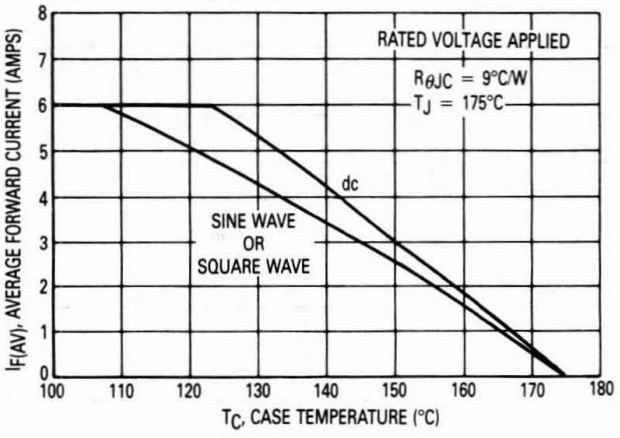

Figure 4. Current Derating, Case (Per Leg)

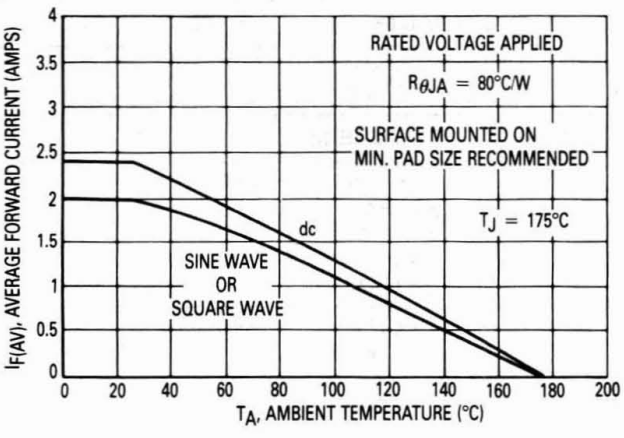

Figure 5. Current Derating, Ambient (Per Leg)

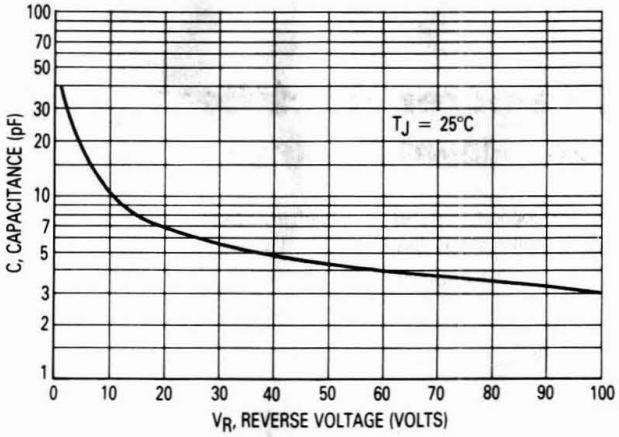

Figure 6. Typical Capacitance (Per Leg)

Designer's™ Data Sheet
SWITCHMODE™ Power Rectifiers
D²PAK Power Surface Mount Package

MURHB840CT

Motorola Preferred Device

ULTRAFAST RECTIFIER
8.0 AMPERES
400 VOLTS

Designed for use in switching power supplies, inverters and as free wheeling diodes, these state–of–the–art devices have the following features:

- Package Designed for Power Surface Mount Applications
- Ultrafast 28 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction
- High Voltage Capability
- Low Leakage Specified @ 150°C Case Temperature
- Short Heat Sink Tab Manufactured — Not Sheared!
- Similar in Size to Industry Standard TO–220 Package



CASE 418B–02
D²PAK

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per reel by adding a "T4" suffix to the part number
- Marking: UH840

4

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	400	Volts
Average Rectified Forward Current (Rated V_R), T_C = 120°C Total Device	$I_{F(AV)}$	4.0 8.0	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 120°C	I_{FM}	8	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	100	Amps
Controlled Avalanche Energy	W_{AVAL}	20	mJ
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175	°C

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance — Junction to Case — Junction to Ambient (1)	$R_{\theta JC}$ $R_{\theta JA}$	3.0 50	°C/W

(1) See Chapter 7 for mounting conditions

Preferred devices are Motorola recommended choices for future use and best overall value.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (2) (i_F = 4.0 Amps, T_C = 150°C) (i_F = 4.0 Amps, T_C = 25°C)	v_F	1.9 2.2	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	500 10	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amps/μs)	t_{rr}	28	ns

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

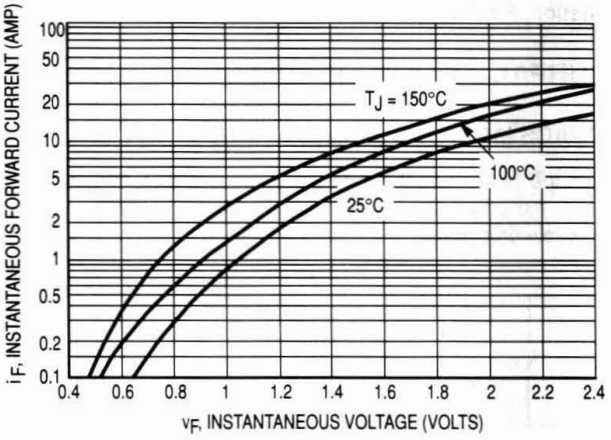

Figure 1. Typical Forward Voltage

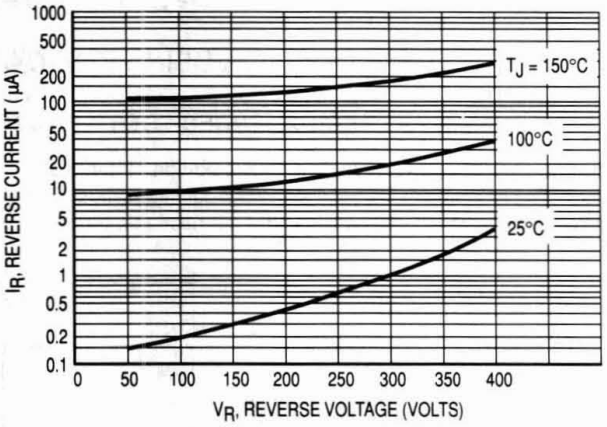

Figure 2. Typical Reverse Current, Per Leg

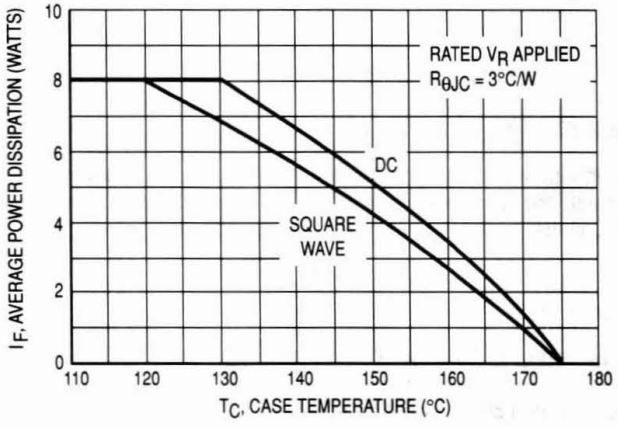

Figure 3. Current Derating, Case

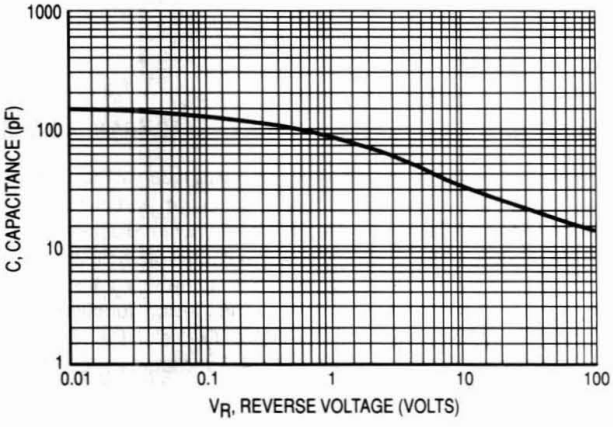

Figure 4. Typical Capacitance, Per Leg

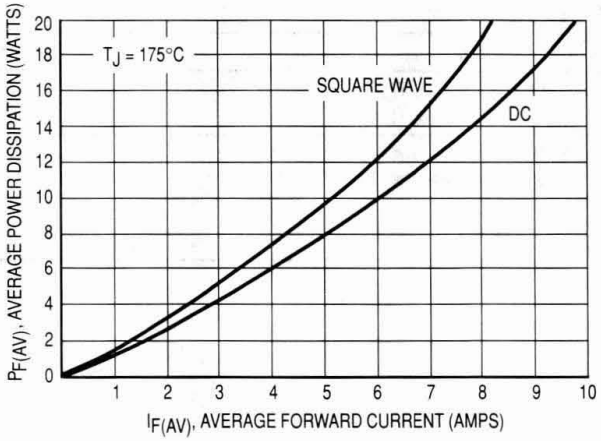

Figure 5. Forward Power Dissipation, Per Leg

4

INFORMATION FOR USING THE D²PAK SURFACE MOUNT PACKAGE

MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to insure proper solder connection interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.

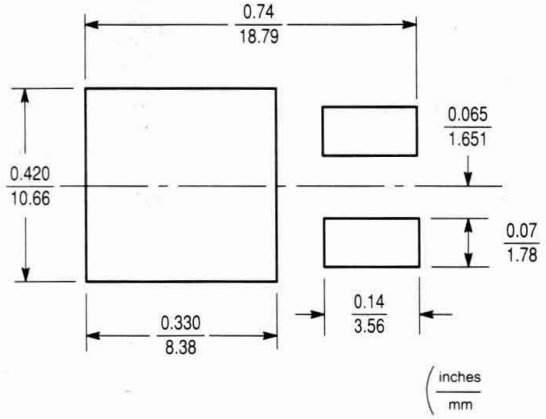

D²PAK POWER DISSIPATION

The power dissipation of the D²PAK is a function of the drain pad size. This can vary from the minimum pad size for soldering to a pad size given for maximum power dissipation. Power dissipation for a surface mount device is determined by $T_{J(max)}$, the maximum rated junction temperature of the die, $R_{\theta JA}$, the thermal resistance from the device junction to ambient; and the operating temperature, T_A. Using the values provided on the data sheet for the D²PAK package, P_D can be calculated as follows:

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

The values for the equation are found in the maximum ratings table on the data sheet. Substituting these values into the equation for an ambient temperature T_A of 25°C, one can calculate the power dissipation of the device which in this case is 3.0 watts.

$$P_D = \frac{175°C - 25°C}{50°C/W} = 3.0 \text{ watts}$$

The 50°C/W for the D²PAK package assumes the recommended drain pad area of 158K mil² on FR–4 glass epoxy printed circuit board to achieve a power dissipation of 3.0 watts using the footprint shown. Another alternative is to use a ceramic substrate or an aluminum core board such as Thermal Clad™. By using an aluminum core board material such as Thermal Clad, the power dissipation can be doubled using the same footprint.

Designer's™ Data Sheet
SWITCHMODE™ Power Rectifiers
D²PAK Power Surface Mount Package

MURB1620CT

Motorola Preferred Device

ULTRAFAST RECTIFIERS
16 AMPERES
200 VOLTS



CASE 418B–02
D²PAK

Designed for use in switching power supplies, inverters and as free wheeling diodes, these state–of–the–art devices have the following features:

- Package Designed for Power Surface Mount Applications
- Ultrafast 35 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction
- Low Leakage Specified @ 150°C Case Temperature
- Short Heat Sink Tab Manufactured – Not Sheared!
- Similar in Size to Industrial Standard TO–220 Package

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per reel by adding a "T4" suffix to the part number
- Marking: U1620T

4

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Current Total Device, (Rated V_R), T_C = 150°C — Total Device	$I_{F(AV)}$	8 16	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 150°C	I_{FM}	16	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	100	Amps
Operating Junction and Storage Temperature	T_J, T_{stg}	– 65 to +175	°C

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3	°C/W
Maximum Thermal Resistance, Junction to Ambient(1)	$R_{\theta JA}$	50	°C/W
Temperature for Soldering Purposes: 1/8″ from Case for 5 Seconds	T_L	260	°C

(1) See Chapter 7 for Mounting Conditions.

Preferred devices are Motorola recommended choices for future use and best overall value.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves —representing boundaries on device characteristics — are given to facilitate "worst case" design.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (2) (i_F = 8 Amp, T_C = 150°C) (i_F = 8 Amp, T_C = 25°C)	v_F	 0.895 0.975	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	 250 5	μA
Maximum Reverse Recovery Time (I_F = 1 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 35 25	ns

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

4

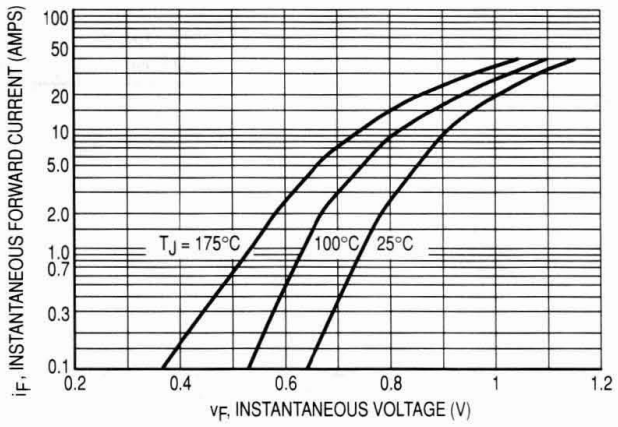

Figure 1. Typical Forward Voltage, Per Leg

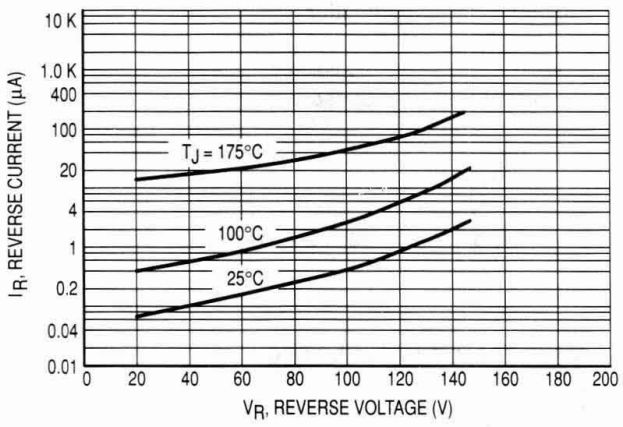

Figure 2. Typical Reverse Current, Per Leg*

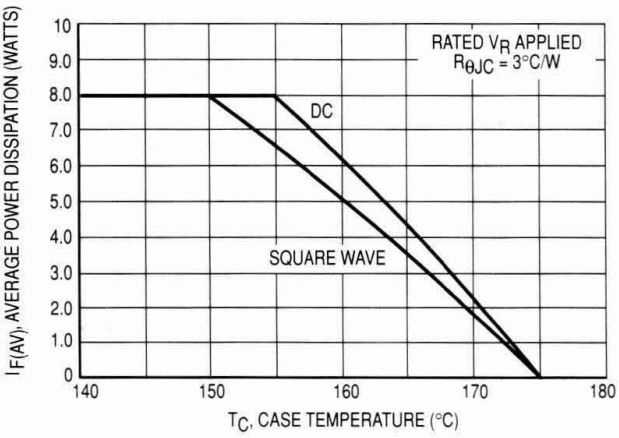

Figure 3. Current Derating Case, Per Leg

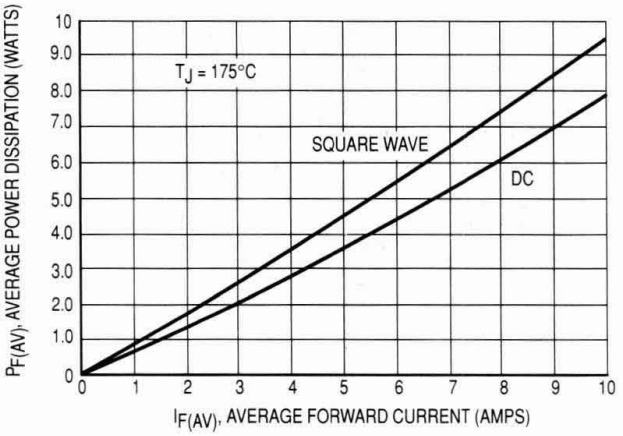

Figure 4. Power Dissipation, Per Leg

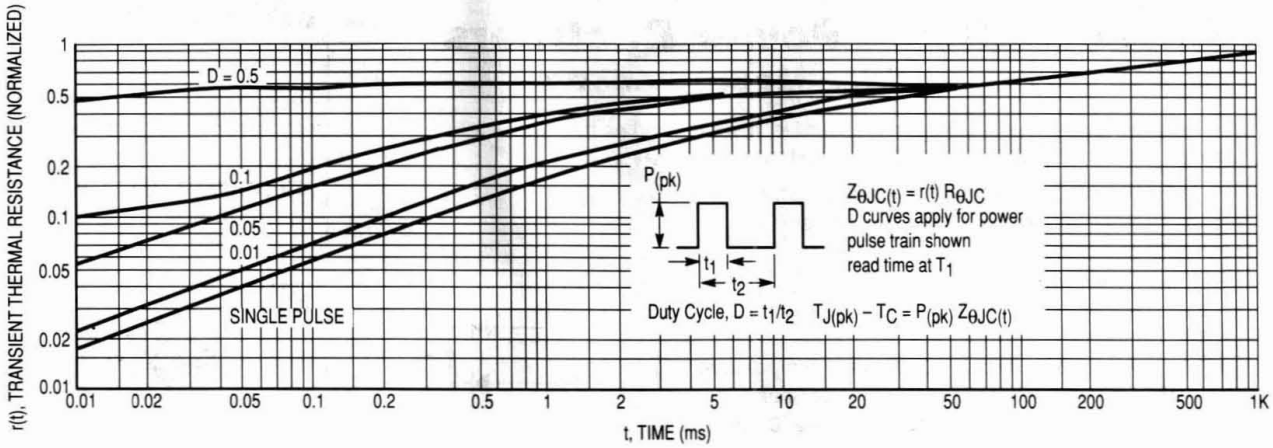

Figure 5. Thermal Response

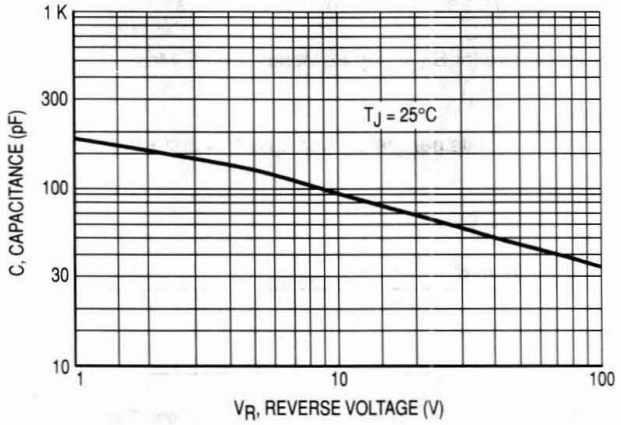

Figure 6. Typical Capacitance, Per Leg

Designer's™ Data Sheet
SWITCHMODE™ Power Rectifiers
D²PAK Power Surface Mount Package

MURB1660CT
Motorola Preferred Device

ULTRAFAST RECTIFIERS
16 AMPERES
600 VOLTS

Designed for use in switching power supplies, inverters and as free wheeling diodes, these state–of–the–art devices have the following features:

- Package Designed for Power Surface Mount Applications
- Ultrafast 60 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction
- High Voltage Capability to 600 V
- Low Leakage Specified @ 150°C Case Temperature
- Short Heat Sink Tab Manufactured – Not Sheared!
- Similar in Size to Industrial Standard TO–220 Package





CASE 418B–02
D²PAK

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.7 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Available in 24 mm Tape and Reel, 800 units per reel by adding a "T4" suffix to the part number
- Marking: U1660T

4

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	600	Volts
Average Rectified Forward Current Total Device, (Rated V_R), T_C = 150°C — Total Device	$I_{F(AV)}$	8 16	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 150°C	I_{FM}	16	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	100	Amps
Operating Junction and Storage Temperature	T_J, T_{stg}	– 65 to +175	°C

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	2	°C/W
Maximum Thermal Resistance, Junction to Ambient(1)	$R_{\theta JA}$	50	°C/W
Temperature for Soldering Purposes: 1/8″ from Case for 5 Seconds	T_L	260	°C

(1) See Chapter 7 for Mounting Conditions

Preferred devices are Motorola recommended choices for future use and best overall value.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (2) (i_F = 8 Amp, T_C = 150°C) (i_F = 8 Amp, T_C = 25°C)	v_F	 1.20 1.50	Volts
Maximum Instantaneous Reverse Current (2) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	 500 10	μA
Maximum Reverse Recovery Time (I_F = 1 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 60 50	ns

(2) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%

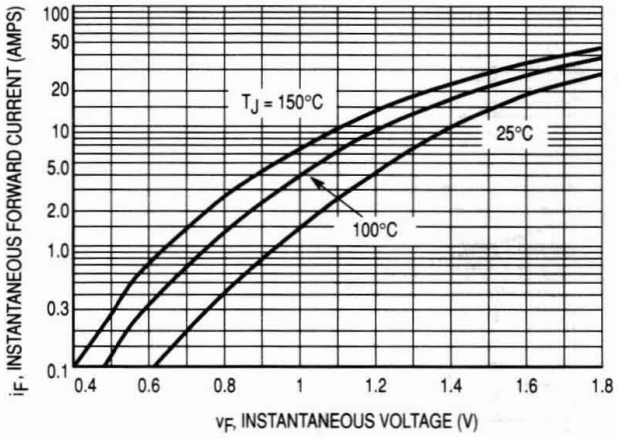

Figure 1. Typical Forward Voltage, Per Leg

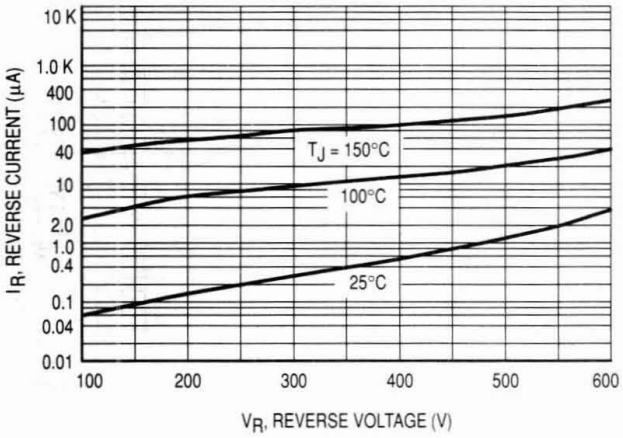

Figure 2. Typical Reverse Current, Per Leg

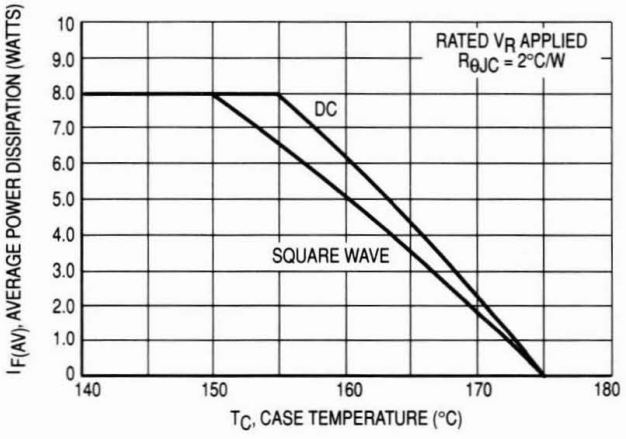

Figure 3. Current Derating, Case, Per Leg

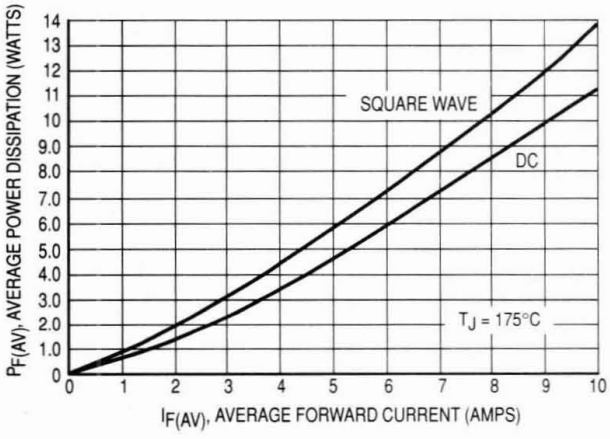

Figure 4. Power Dissipation, Per Leg

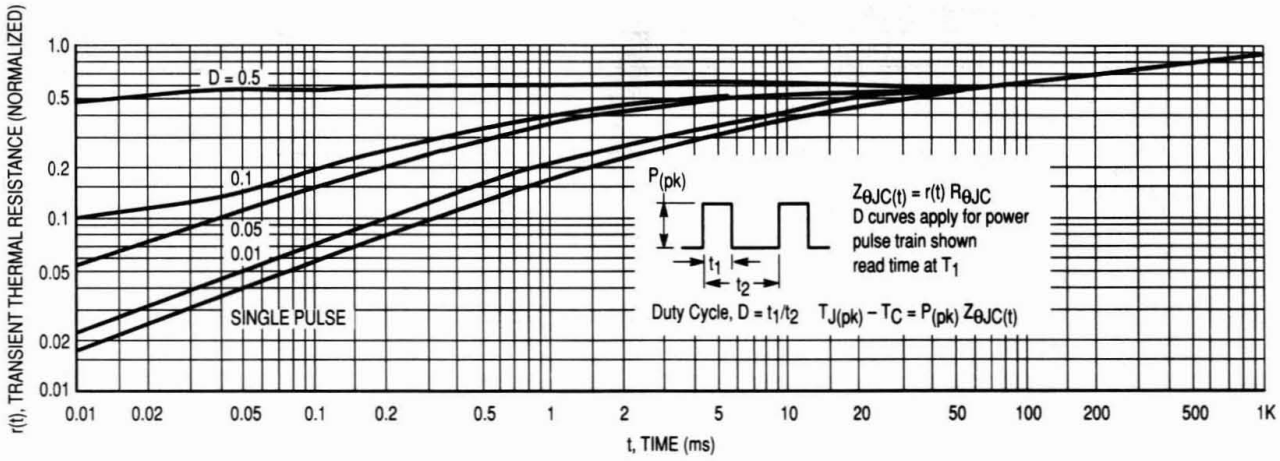

Figure 5. Thermal Response

4

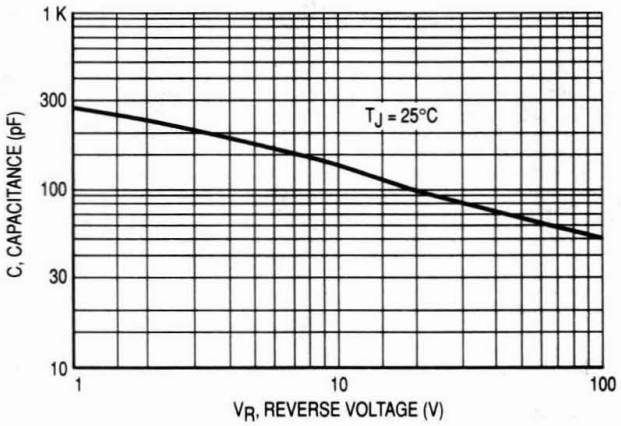

Figure 6. Typical Capacitance, Per Leg



MUR120
MUR140
MUR160

MUR120, MUR140 and MUR160 are Motorola Preferred Devices

Switchmode Power Rectifiers

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 25, 50 and 75 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 600 Volts

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 1000 per bag.
- Available Tape and Reeled, 5000 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: U120, U140, U160

ULTRAFAST RECTIFIERS

1.0 AMPERE
200–400–600 VOLTS

CASE 59-04
PLASTIC

4

MAXIMUM RATINGS

Rating	Symbol	MUR 120	MUR 140	MUR 160	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	400	600	Volts
Average Rectified Forward Current (Square Wave Mounting Method #3 Per Note 1)	$I_{F(AV)}$	1.0 @ T_A = 130°C	1.0 @ T_A = 120°C		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	35			Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175			°C

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	See Note 1	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 1.0 Amp, T_J = 150°C) (i_F = 1.0 Amp, T_J = 25°C)	v_F	 0.710 0.875	 1.05 1.25	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 150°C) (Rated dc Voltage, T_J = 25°C)	i_R	 50 2.0	 150 5.0	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 A)	t_{rr}	 35 25	 75 50	ns
Maximum Forward Recovery Time (I_F = 1.0 A, di/dt = 100 A/μs, I_{REC} to 1.0 V)	t_{fr}	25	50	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 3

MUR120

FIGURE 1 — TYPICAL FORWARD VOLTAGE

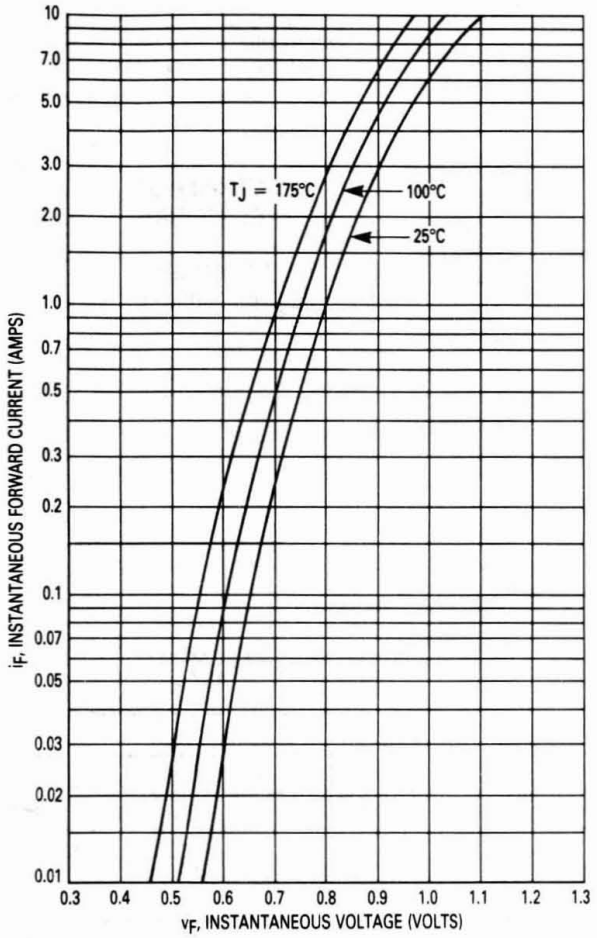

FIGURE 2 — TYPICAL REVERSE CURRENT*

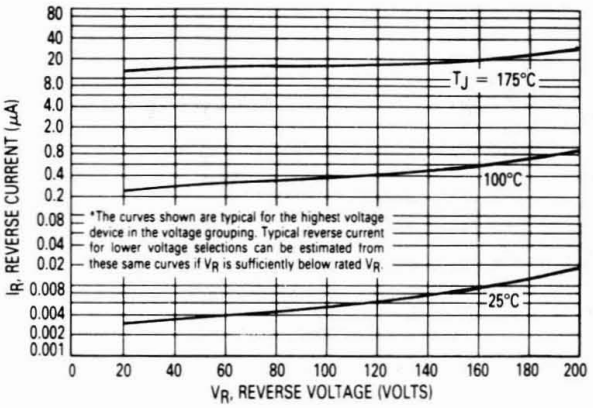

FIGURE 3 — CURRENT DERATING (MOUNTING METHOD #3 PER NOTE 1)

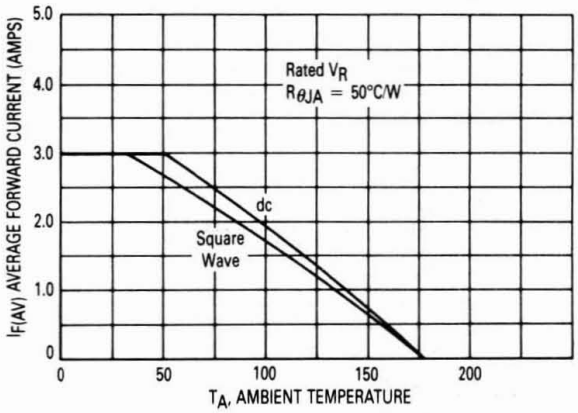

FIGURE 4 — POWER DISSIPATION

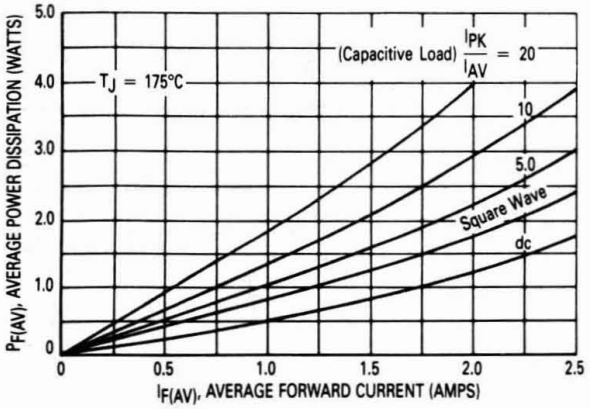

FIGURE 5 — TYPICAL CAPACITANCE

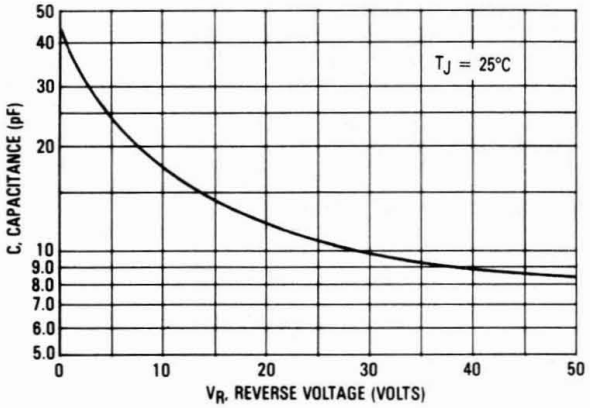

FIGURE 6 — TYPICAL FORWARD VOLTAGE

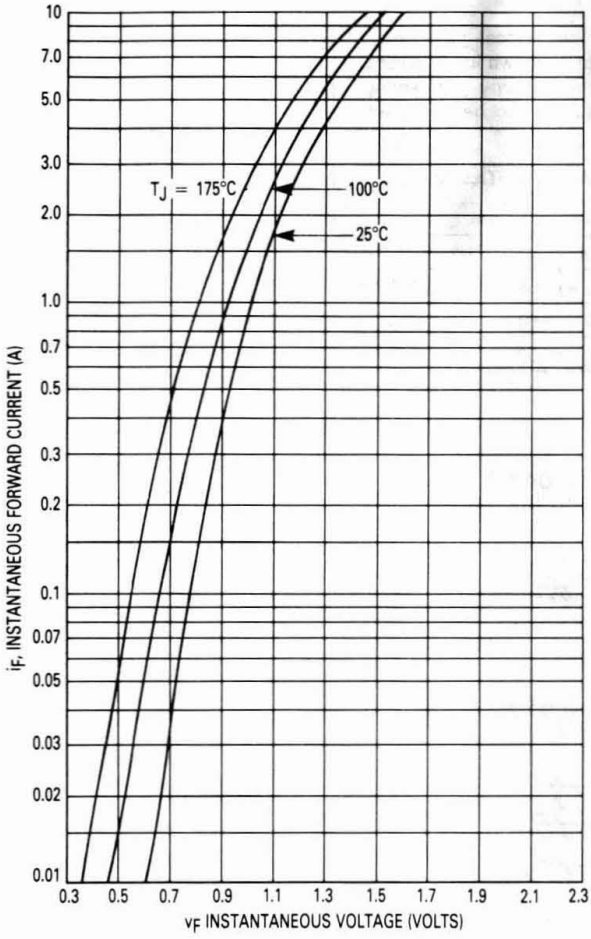

FIGURE 7 — TYPICAL REVERSE CURRENT*

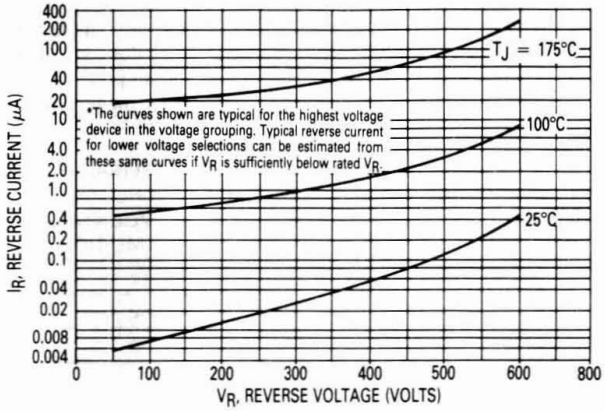

FIGURE 8 — CURRENT DERATING (MOUNTING METHOD #3 PER NOTE 1)

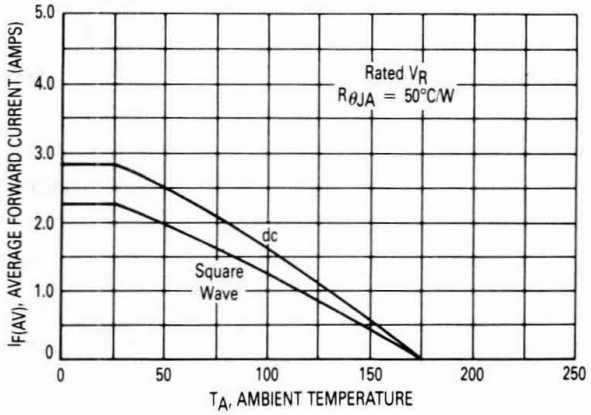

FIGURE 9 — POWER DISSIPATION

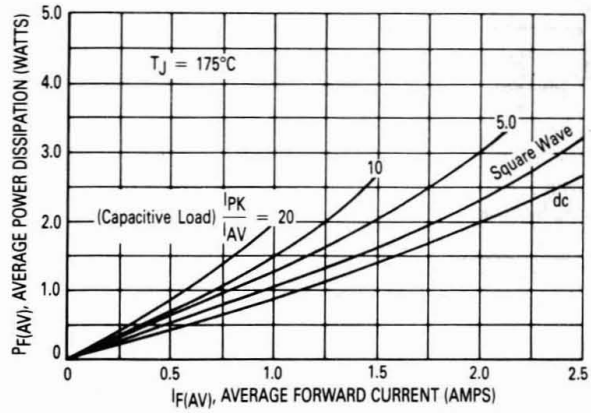

FIGURE 10 — TYPICAL CAPACITANCE

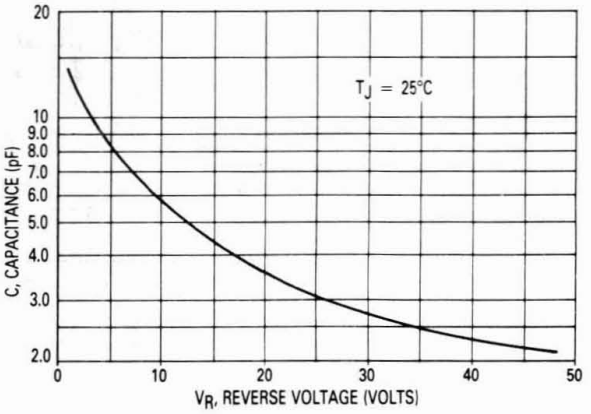

NOTE 1 — AMBIENT MOUNTING DATA

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

MOUNTING METHOD		LEAD LENGTH, L			UNITS
		1/8	1/4	1/2	
1	$R_{\theta JA}$	52	65	72	°C/W
2		67	80	87	°C/W
3		50			°C/W

MOUNTING METHOD 1



MOUNTING METHOD 2



Vector Pin Mounting

MOUNTING METHOD 3



Board Ground Plane

P.C. Board with 1-1/2" x 1-1/2" Copper Surface

SWITCHMODE Power Rectifiers Ultrafast "E" Series w/High Reverse Energy Capability

MUR190E
MUR1100E

MUR1100E is a Motorola Preferred Device

ULTRAFAST RECTIFIERS
1.0 AMPERE
900–1000 VOLTS

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- 20 mjoules Avalanche Energy Guaranteed
- Excellent Protection Against Voltage Transients in Switching Inductive Load Circuits
- Ultrafast 75 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 1000 Volts



CASE 59-04

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16" from case
- Shipped in plastic bags, 1000 per bag.
- Available Tape and Reeled, 5000 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: U190E, U1100E

4

MAXIMUM RATINGS

Rating	Symbol	MUR 190E	MUR 1100E	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	900	1000	Volts
Average Rectified Forward Current (Square Wave) (Mounting Method #3 Per Note 1)	$I_{F(AV)}$	1.0 @ T_A = 95°C		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	35		Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175		°C

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	See Note 1	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (I_F = 1.0 Amps, T_J = 150°C) (I_F = 1.0 Amps, T_J = 25°C)	v_F	 1.50 1.75	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 100°C) (Rated dc Voltage, T_J = 25°C)	i_R	 600 10	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 100 75	ns
Maximum Forward Recovery Time (I_F = 1.0 Amp, di/dt = 100 Amp/μs, Recovery to 1.0 V)	t_{fr}	75	ns
Controlled Avalanche Energy (See Test Circuit in Figure 6)	W_{AVAL}	10	mJ

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%

Rev 1

ELECTRICAL CHARACTERISTICS

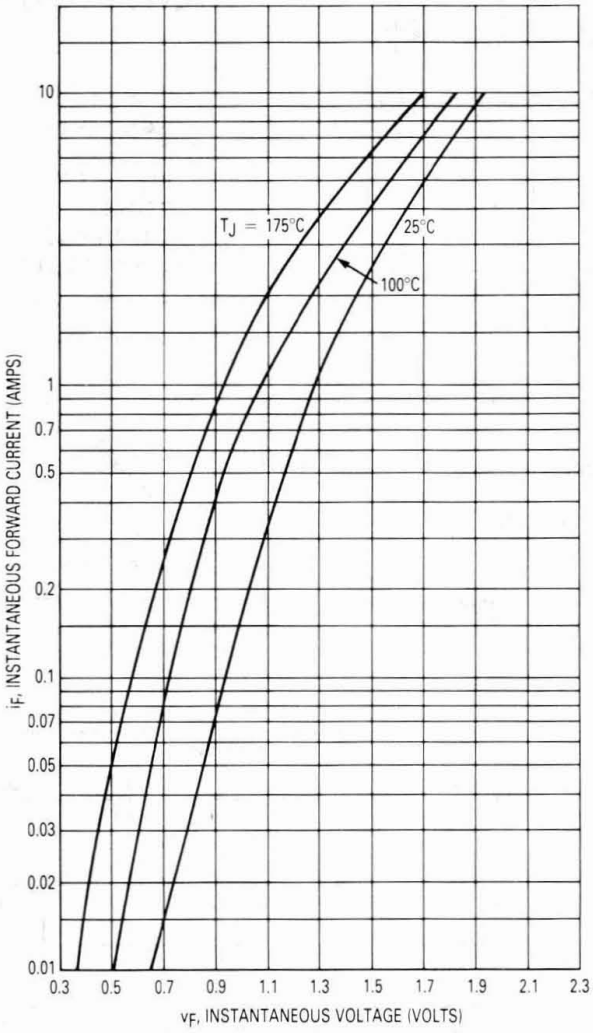

Figure 1. Typical Forward Voltage

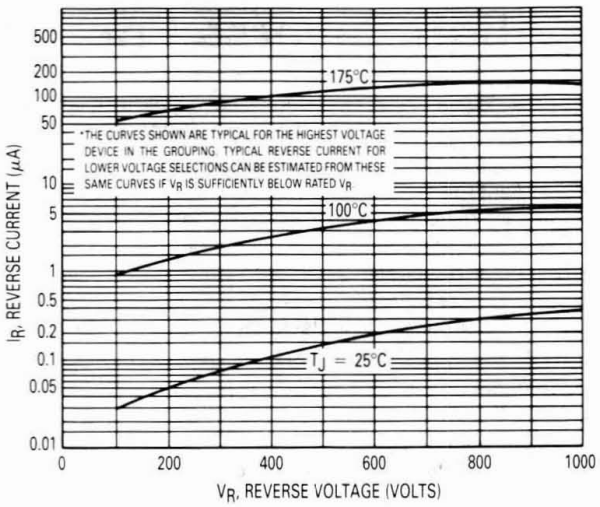

Figure 2. Typical Reverse Current*

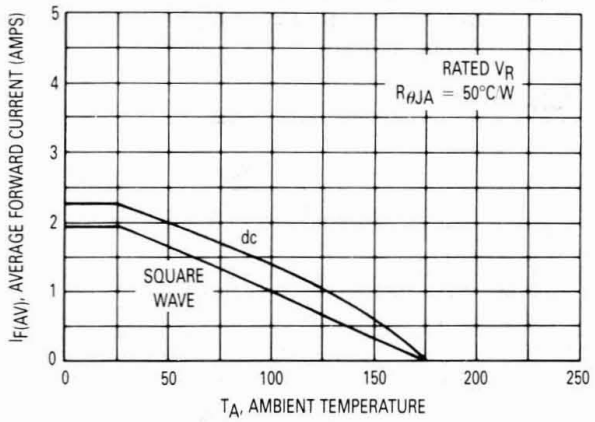

Figure 3. Current Derating (Mounting Method #3 Per Note 1)

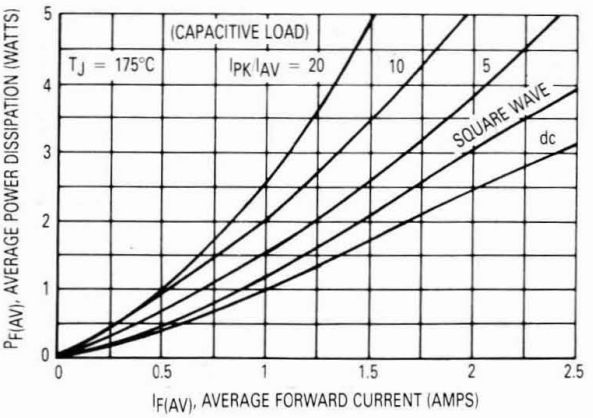

Figure 4. Power Dissipation

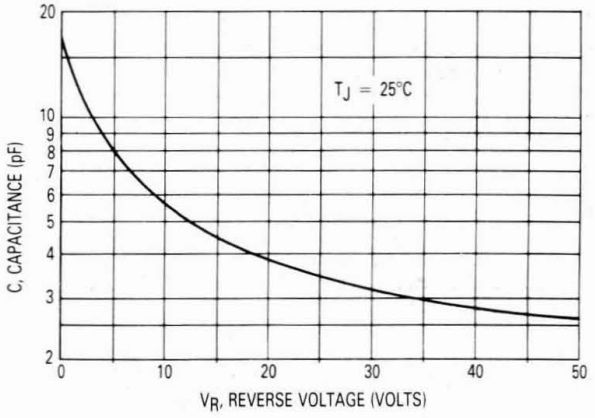

Figure 5. Typical Capacitance

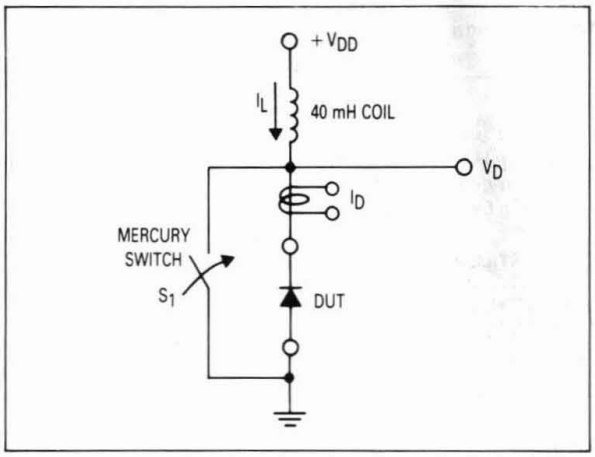

Figure 6. Test Circuit

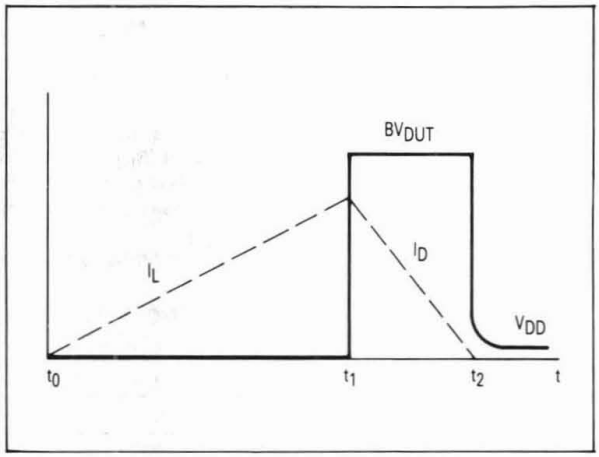

Figure 7. Current-Voltage Waveforms

The unclamped inductive switching circuit shown in Figure 6 was used to demonstrate the controlled avalanche capability of the new "E" series Ultrafast rectifiers. A mercury switch was used instead of an electronic switch to simulate a noisy environment when the switch was being opened.

When S_1 is closed at t_0 the current in the inductor I_L ramps up linearly; and energy is stored in the coil. At t_1 the switch is opened and the voltage across the diode under test begins to rise rapidly, due to di/dt effects, when this induced voltage reaches the breakdown voltage of the diode, it is clamped at BV_{DUT} and the diode begins to conduct the full load current which now starts to decay linearly through the diode, and goes to zero at t_2.

By solving the loop equation at the point in time when S_1 is opened; and calculating the energy that is transferred to the diode it can be shown that the total energy transferred is equal to the energy stored in the inductor plus a finite amount of energy from the V_{DD} power supply while the diode is in breakdown (from t_1 to t_2) minus any losses due to finite component resistances. Assuming the component resistive elements are small Equation (1) approximates the total energy transferred to the diode. It can be seen from this equation that if the V_{DD} voltage is low compared to the breakdown voltage of the device, the amount of energy contributed by the supply during breakdown is small and the total energy can be assumed to be nearly equal to the energy stored in the coil during the time when S_1 was closed, Equation (2).

The oscilloscope picture in Figure 8, shows the information obtained for the MUR8100E (similar die construction as the MUR1100E Series) in this test circuit conducting a peak current of one ampere at a breakdown voltage of 1300 volts, and using Equation (2) the energy absorbed by the MUR8100E is approximately 20 mjoules.

Although it is not recommended to design for this condition, the new "E" series provides added protection against those unforeseen transient viruses that can produce unexplained random failures in unfriendly environments.

EQUATION (1):

$$W_{AVAL} \approx \frac{1}{2} LI_{LPK}^2 \left(\frac{BV_{DUT}}{BV_{DUT} - V_{DD}} \right)$$

EQUATION (2):

$$W_{AVAL} \approx \frac{1}{2} LI_{LPK}^2$$

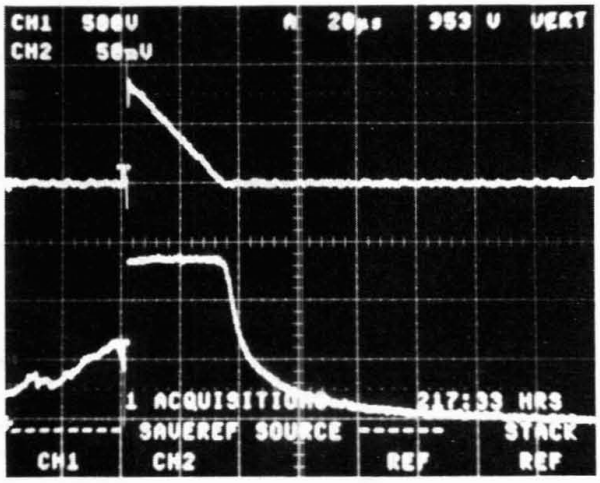

CHANNEL 2:
I_L
0.5 AMPS/DIV.

CHANNEL 1:
V_{DUT}
500 VOLTS/DIV.

TIME BASE:
20 μs/DIV.

Figure 8. Current-Voltage Waveforms

Note 1. Ambient Mounting Data

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

MOUNTING METHOD		LEAD LENGTH, L			UNITS
		1/8	1/4	1/2	
1	$R_{\theta JA}$	52	65	72	°C/W
2		67	80	87	°C/W
3		50			°C/W

MOUNTING METHOD 1



MOUNTING METHOD 2



VECTOR PIN MOUNTING

MOUNTING METHOD 3



BOARD GROUND PLANE

P.C. BOARD WITH 1-1/2" x 1-1/2" COPPER SURFACE

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MUR420
MUR460

MUR420 and MUR460
are Motorola Preferred Devices

Switchmode Power Rectifiers

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 25, 50 and 75 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 600 Volts

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.1 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 5,000 per bag.
- Available Tape and Reeled, 1500 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: U420, U460

ULTRAFAST RECTIFIERS

4.0 AMPERES
200–600 VOLTS



CASE 267-03
PLASTIC

4

MAXIMUM RATINGS

Rating	Symbol	MUR 420	MUR 460	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	600	Volts
Average Rectified Forward Current (Square Wave) (Mounting Method #3 Per Note 1)	$I_{F(AV)}$	4.0 @ T_A = 80°C	4.0 @ T_A = 40°C	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	125	70	Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175		°C

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	See Note 1		°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 3.0 Amp, T_J = 150°C) (i_F = 3.0 Amp, T_J = 25°C) (i_F = 4.0 Amp, T_J = 25°C)	v_F	 0.710 0.875 0.890	 1.05 1.25 1.28	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 150°C) (Rated dc Voltage, T_J = 25°C)	i_R	 150 5.0	 250 10	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 35 25	 75 50	ns
Maximum Forward Recovery Time (I_F = 1.0 A, di/dt = 100 A/μs, Recovery to 1.0 V)	t_{fr}	25	50	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 3

MUR420

FIGURE 1 — TYPICAL FORWARD VOLTAGE

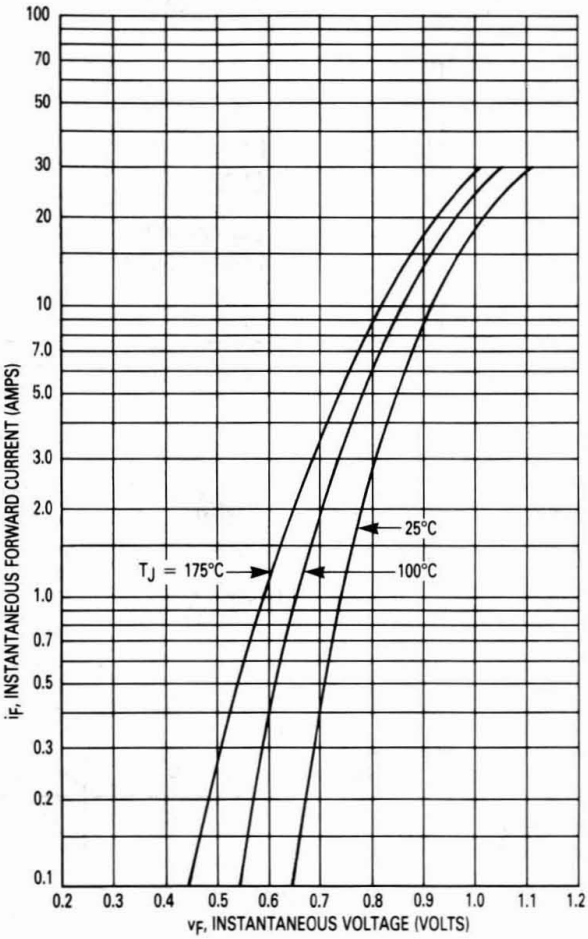

FIGURE 2 — TYPICAL REVERSE CURRENT*

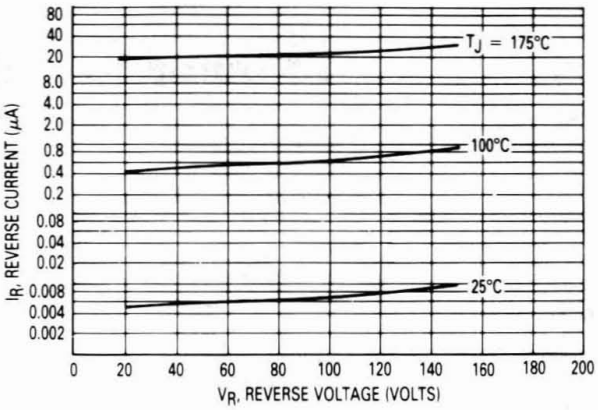

FIGURE 3 — CURRENT DERATING (MOUNTING METHOD #3 PER NOTE 1)

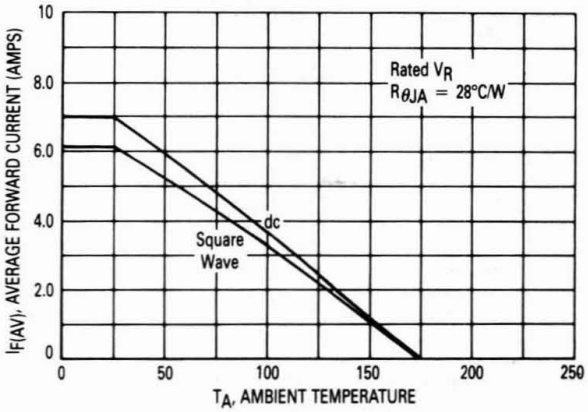

FIGURE 4 — POWER DISSIPATION

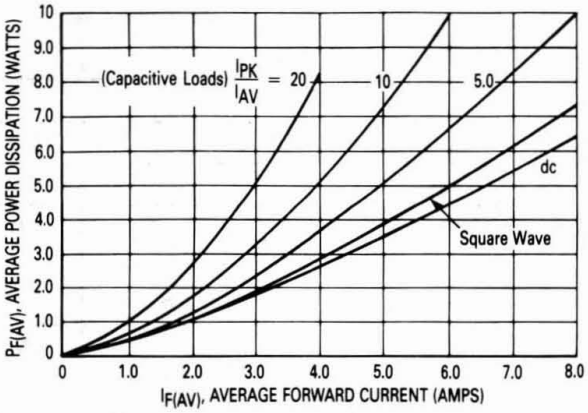

FIGURE 5 — TYPICAL CAPACITANCE

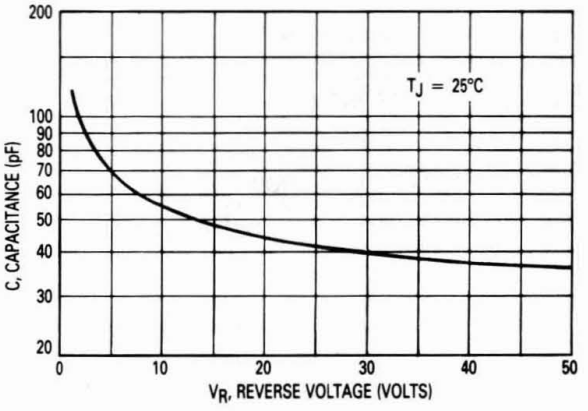

4

MUR460

FIGURE 6 — TYPICAL FORWARD VOLTAGE

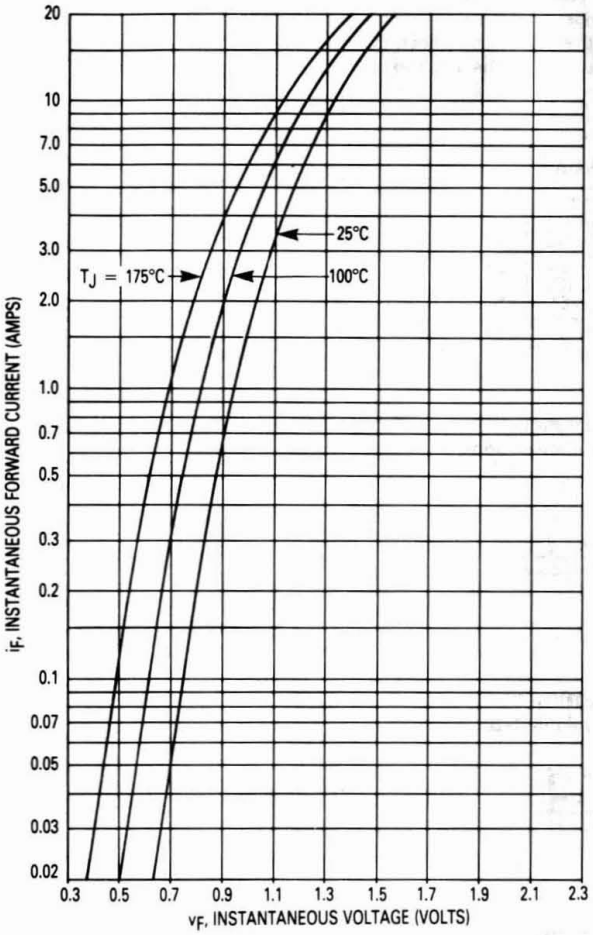

FIGURE 7 — TYPICAL REVERSE CURRENT*

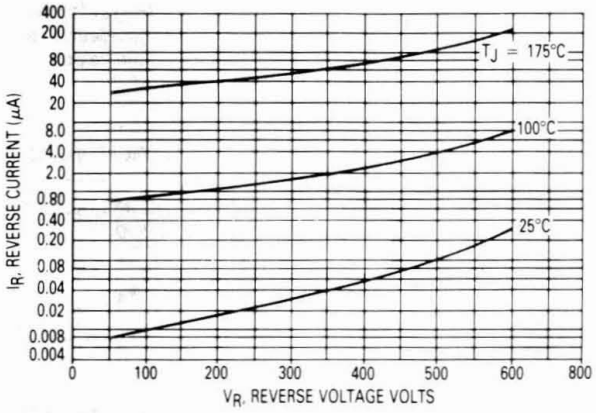

4

FIGURE 8 — CURRENT DERATING (MOUNTING METHOD #3 PER NOTE 1)

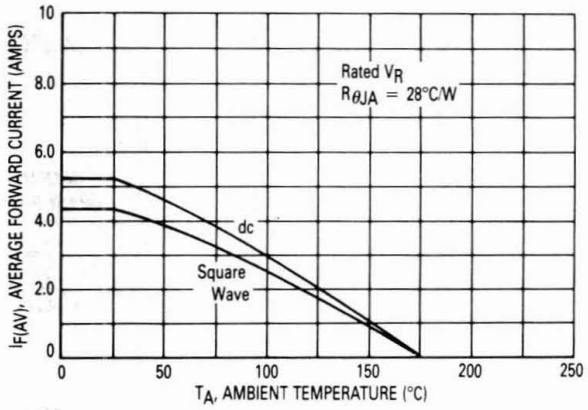

FIGURE 9 — POWER DISSIPATION

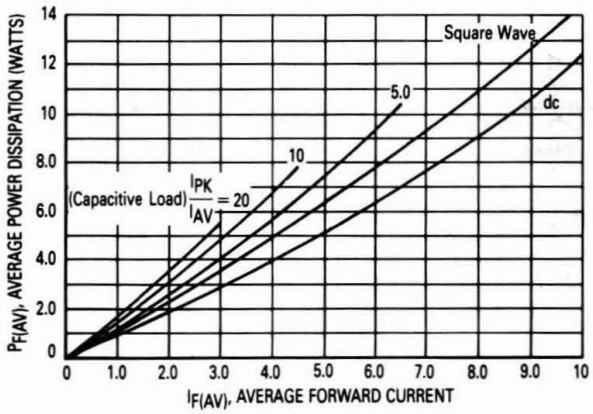

FIGURE 10 — TYPICAL CAPACITANCE

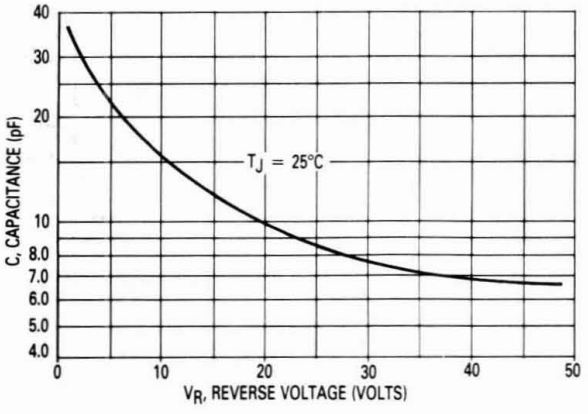

NOTE 1 — AMBIENT MOUNTING DATA

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

MOUNTING METHOD		LEAD LENGTH, L (IN)				UNITS
		1/8	1/4	1/2	3/4	
1	$R_{\theta JA}$	50	51	53	55	°C/W
2		58	59	61	63	°C/W
3		28				°C/W

MOUNTING METHOD 1
P.C. Board Where Available Copper Surface area is small.



MOUNTING METHOD 2
Vector Push-In Terminals T-28



MOUNTING METHOD 3
P.C. Board with
1-1/2" x 1-1/2" Copper Surface



4

Switchmode Power Rectifiers Ultrafast "E" Series w/High Reverse Energy Capability

MUR490E
MUR4100E

MUR4100E is a Motorola Preferred Device

ULTRAFAST RECTIFIERS
4.0 AMPERES
900–1000 VOLTS

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- 20 mJ Avalanche Energy Guaranteed
- Excellent Protection Against Voltage Transients in Switching Inductive Load Circuits
- Ultrafast 75 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 1000 Volts



CASE 267-03

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.1 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16" from case
- Shipped in plastic bags, 5,000 per bag.
- Available Tape and Reeled, 1500 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: U490E, U4100E

4

MAXIMUM RATINGS

Rating	Symbol	MUR490E	MUR4100E	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	900	1000	Volts
Average Rectified Forward Current (Square Wave) (Mounting Method #3 Per Note 1)	$I_{F(AV)}$	4.0 @ T_A = 35°C		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	70		Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175		°C

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	See Note 1	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (I_F = 3.0 Amps, T_J = 150°C) (I_F = 3.0 Amps, T_J = 25°C) (I_F = 4.0 Amps, T_J = 25°C)	v_F	 1.53 1.75 1.85	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 100°C) (Rated dc Voltage, T_J = 25°C)	i_R	 900 25	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 100 75	ns
Maximum Forward Recovery Time (I_F = 1.0 Amp, di/dt = 100 Amp/μs, Recovery to 1.0 V)	t_{fr}	75	ns
Controlled Avalanche Energy (See Test Circuit in Figure 6)	W_{AVAL}	20	mJ

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%

Rev 2

ELECTRICAL CHARACTERISTICS

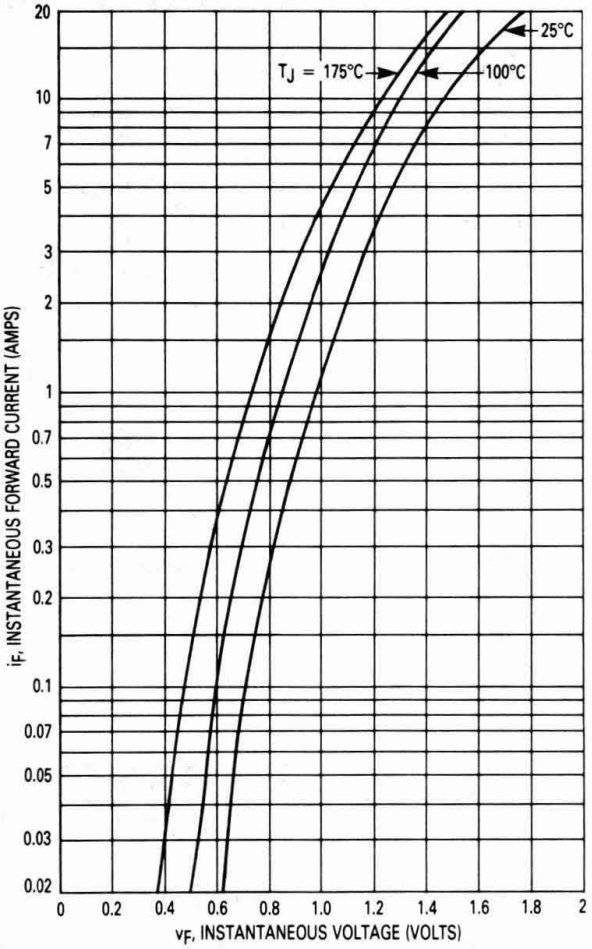

Figure 1. Typical Forward Voltage

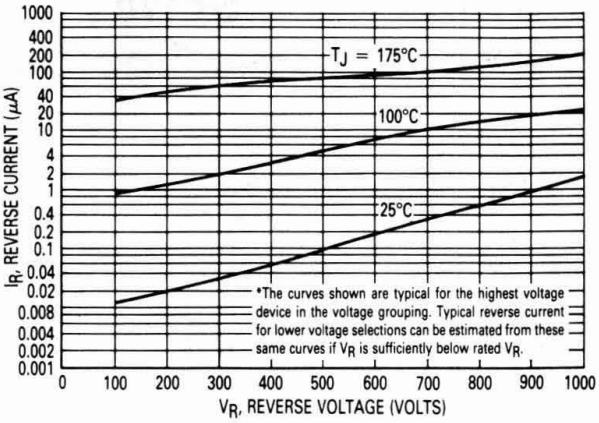

Figure 2. Typical Reverse Current*

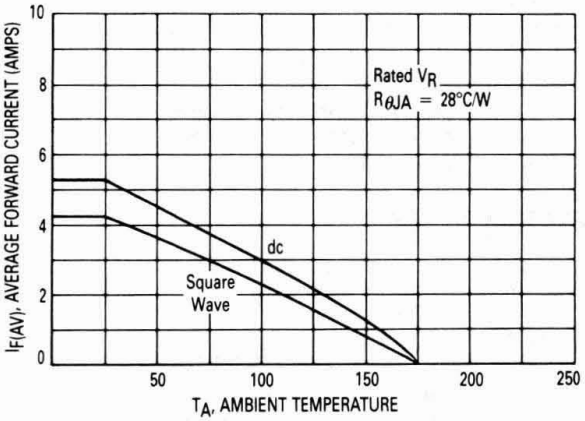

Figure 3. Current Derating (Mounting Method #3 Per Note 1)

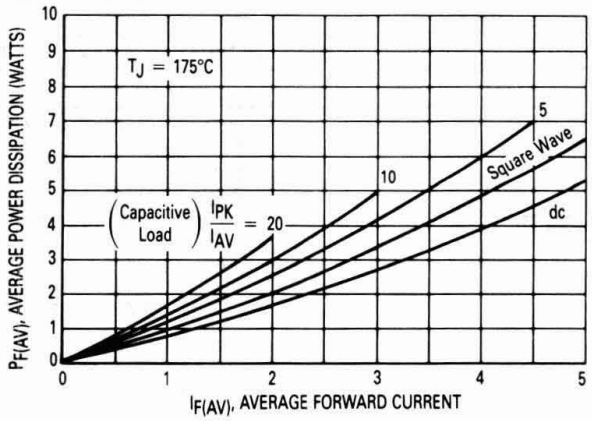

Figure 4. Power Dissipation

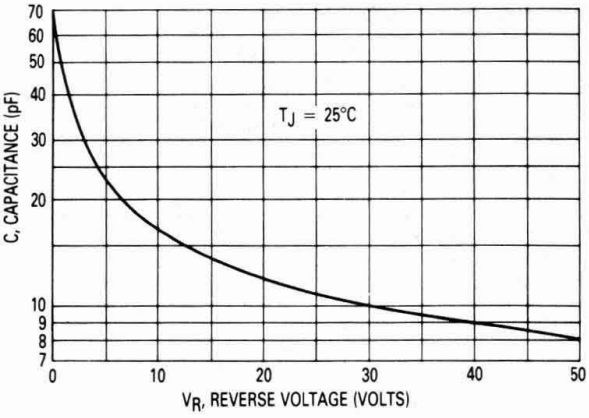

Figure 5. Typical Capacitance

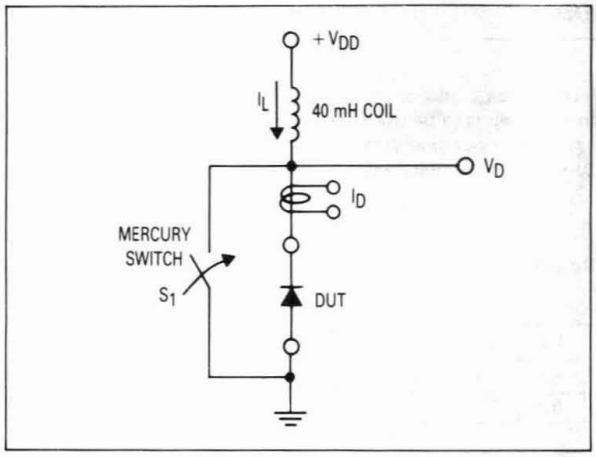

Figure 6. Test Circuit

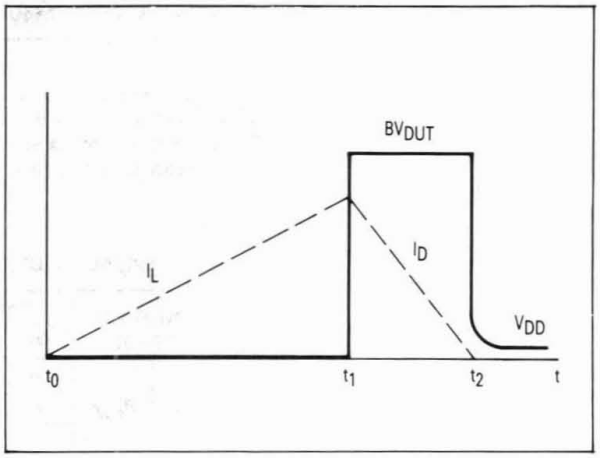

Figure 7. Current-Voltage Waveforms

The unclamped inductive switching circuit shown in Figure 6 was used to demonstrate the controlled avalanche capability of the new "E" series Ultrafast rectifiers. A mercury switch was used instead of an electronic switch to simulate a noisy environment when the switch was being opened.

When S_1 is closed at t_0 the current in the inductor I_L ramps up linearly; and energy is stored in the coil. At t_1 the switch is opened and the voltage across the diode under test begins to rise rapidly, due to di/dt effects, when this induced voltage reaches the breakdown voltage of the diode, it is clamped at BV_{DUT} and the diode begins to conduct the full load current which now starts to decay linearly through the diode, and goes to zero at t_2.

By solving the loop equation at the point in time when S_1 is opened; and calculating the energy that is transferred to the diode it can be shown that the total energy transferred is equal to the energy stored in the inductor plus a finite amount of energy from the V_{DD} power supply while the diode is in breakdown (from t_1 to t_2) minus any losses due to finite component resistances. Assuming the component resistive elements are small Equation (1) approximates the total energy transferred to the diode. It can be seen from this equation that if the V_{DD} voltage is low compared to the breakdown voltage of the device, the amount of energy contributed by the supply during breakdown is small and the total energy can be assumed to be nearly equal to the energy stored in the coil during the time when S_1 was closed, Equation (2).

The oscilloscope picture in Figure 8, shows the information obtained for the MUR8100E (similar die construction as the MUR4100E Series) in this test circuit conducting a peak current of one ampere at a breakdown voltage of 1300 volts, and using Equation (2) the energy absorbed by the MUR8100E is approximately 20 mjoules.

Although it is not recommended to design for this condition, the new "E" series provides added protection against those unforeseen transient viruses that can produce unexplained random failures in unfriendly environments.

EQUATION (1):

$$W_{AVAL} \approx \frac{1}{2} LI_{LPK}^2 \left(\frac{BV_{DUT}}{BV_{DUT} - V_{DD}} \right)$$

EQUATION (2):

$$W_{AVAL} \approx \frac{1}{2} LI_{LPK}^2$$

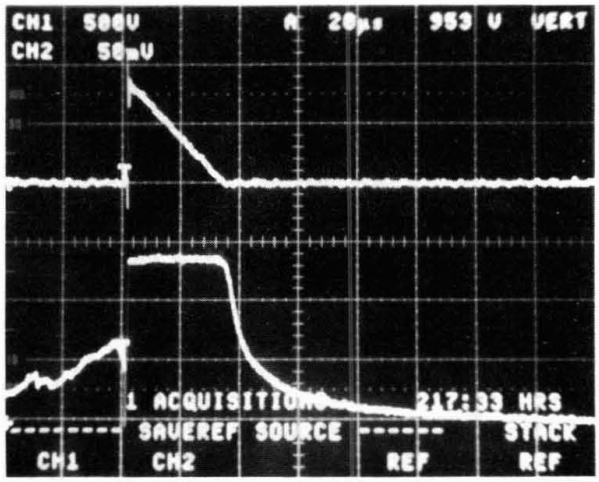

CHANNEL 2:
I_L
0.5 AMPS/DIV.

CHANNEL 1:
V_{DUT}
500 VOLTS/DIV.

TIME BASE:
20 μs/DIV.

Figure 8. Current-Voltage Waveforms

Note 1 — Ambient Mounting Data

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

MOUNTING METHOD		LEAD LENGTH, L (IN)				UNITS
		1/8	1/4	1/2	3/4	
1	$R_{\theta JA}$	50	51	53	55	°C/W
2		58	59	61	63	°C/W
3		28				°C/W

MOUNTING METHOD 1
P.C. Board Where Available Copper Surface area is small.



MOUNTING METHOD 2
Vector Push-In Terminals T-28



MOUNTING METHOD 3
P.C. Board with
1-1/2" x 1-1/2" Copper Surface



4

MUR620CT

Motorola Preferred Device

Switchmode Power Rectifiers

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Popular TO-220 Package

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U620

ULTRAFAST RECTIFIERS

6 AMPERES
200 VOLTS

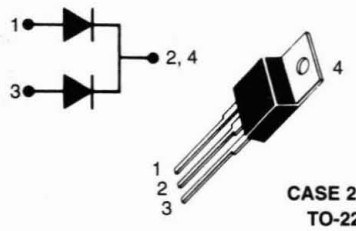

CASE 221A-06
TO-220AB
PLASTIC

4

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Voltage (Rated V_R) T_C = 130°C	Per Diode Total Device	$I_{F(AV)}$	3.0 6.0	Amps
Peak Repetitive Forward Current Per Diode Leg (Rated V_R, Square Wave, 20 kHz) T_C = 130°C		I_{FRM}	6.0	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	75	Amps
Operating Junction Temperature and Storage Temperature		T_J, T_{stg}	−65 to +175	°C

THERMAL CHARACTERISTICS PER DIODE LEG

Rating	Symbol	Typical	Maximum	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	5.0–6.0	7.0	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE LEG

Instantaneous Forward Voltage (1) (i_F = 3.0 Amp, T_C = 150°C (i_F = 3.0 Amp, T_C = 25°C)	v_F	 0.80 0.94	 0.895 0.975	Volts
Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	 2.0–10 0.01–3.0	 250 5.0	μA
Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs)	t_{rr}	20–30	35	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 1

FIGURE 1 — TYPICAL FORWARD VOLTAGE

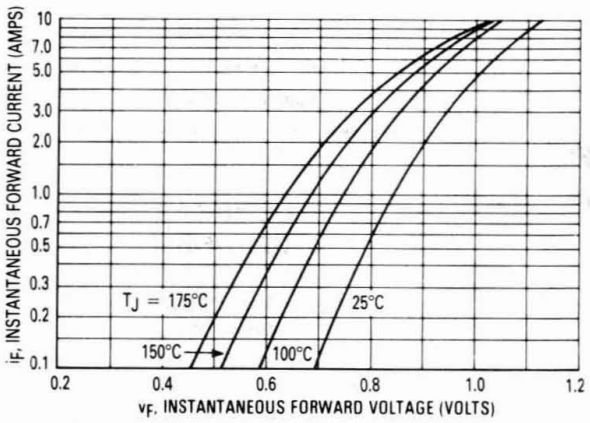

FIGURE 2 — TYPICAL REVERSE CURRENT

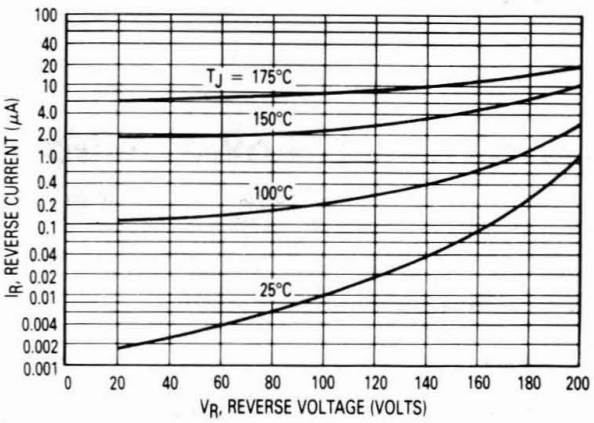

FIGURE 3 — TOTAL DEVICE CURRENT DERATING, CASE

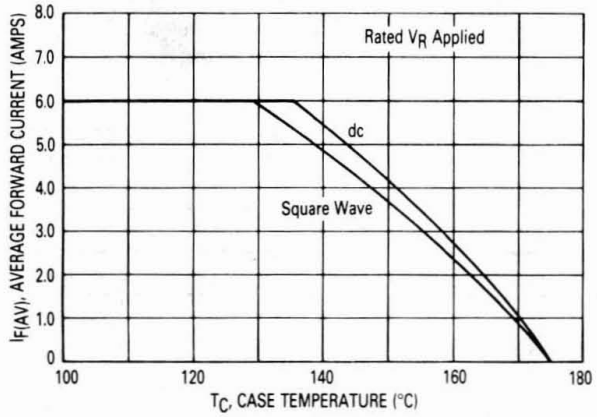

FIGURE 4 — TOTAL DEVICE CURRENT DERATING, AMBIENT

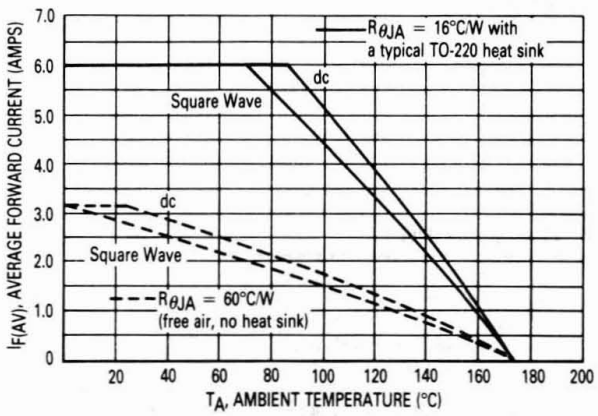

FIGURE 5 — POWER DISSIPATION

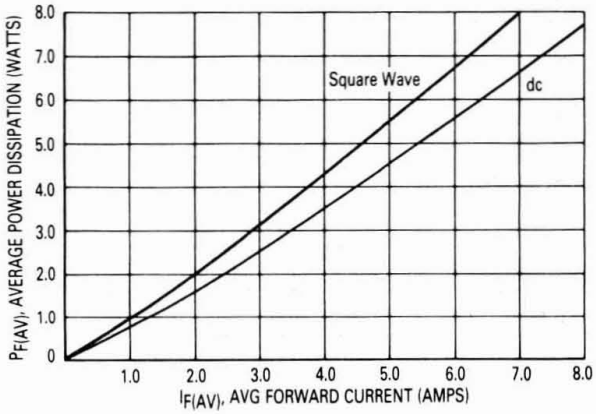

Switchmode Power Rectifiers

MURH840CT

Motorola Preferred Device

ULTRAFAST RECTIFIER
8.0 AMPERES
400 VOLTS

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 28 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Popular TO-220 Package
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction
- High Voltage Capability to 400 Volts
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating @ Both Case and Ambient Temperatures





CASE 221A-06
TO-220AB

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: UH840

4

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	400	Volts
Average Rectified Forward Current Total Device, (Rated V_R), T_C = 120°C	Per Leg Total Device	$I_{F(AV)}$	4.0 8.0	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 120°C	Per Diode Leg	I_{FM}	16	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	100	Amps
Controlled Avalanche Energy		W_{AVAL}	20	mJ
Operating Junction Temperature and Storage Temperature		T_J, T_{stg}	−65 to +175	°C

THERMAL CHARACTERISTICS, PER DIODE LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.0	°C/W

ELECTRICAL CHARACTERISTICS, PER DIODE LEG

Maximum Instantaneous Forward Voltage (1) (I_F = 4.0 Amps, T_C = 150°C) (I_F = 4.0 Amps, T_C = 25°C)	v_F	 1.9 2.2	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	 500 10	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amps/μs)	t_{rr}	28	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 1

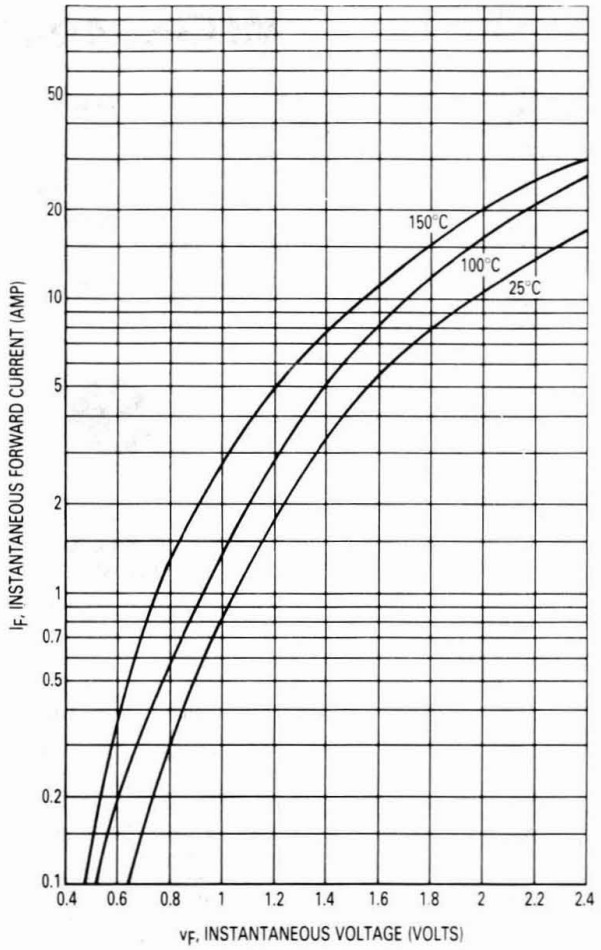

Figure 1. Typical Forward Voltage

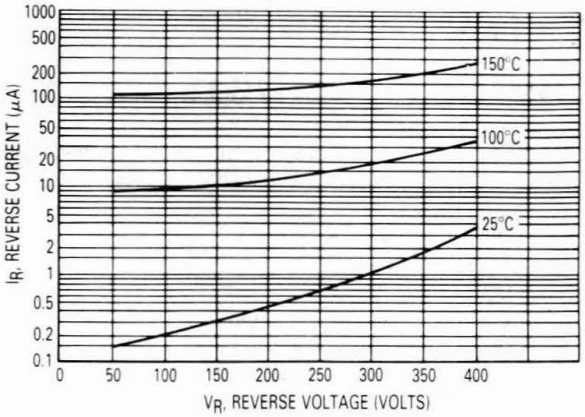

Figure 2. Typical Reverse Current, Per Leg

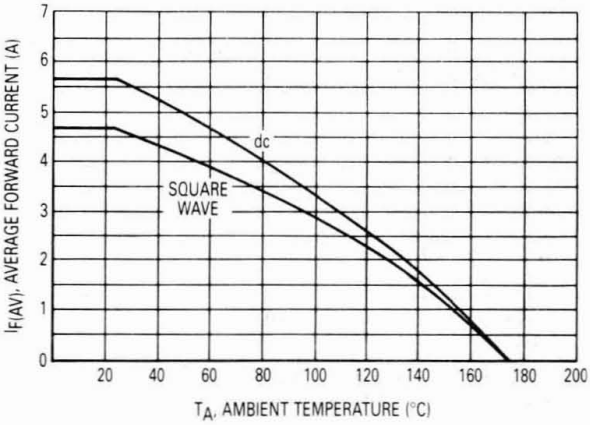

Figure 3. Forward Current Derating, Ambient, Per Leg

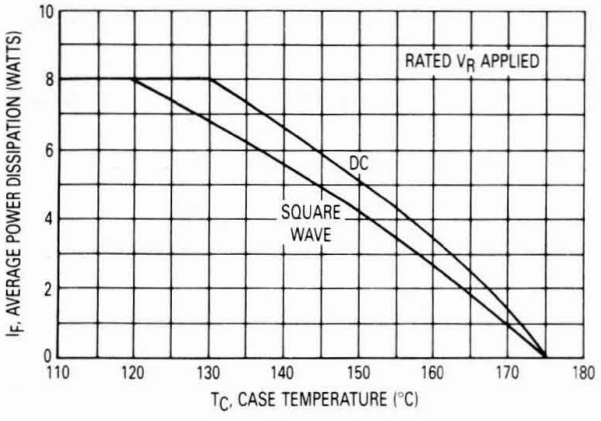

Figure 4. Current Derating, Case, Per Leg

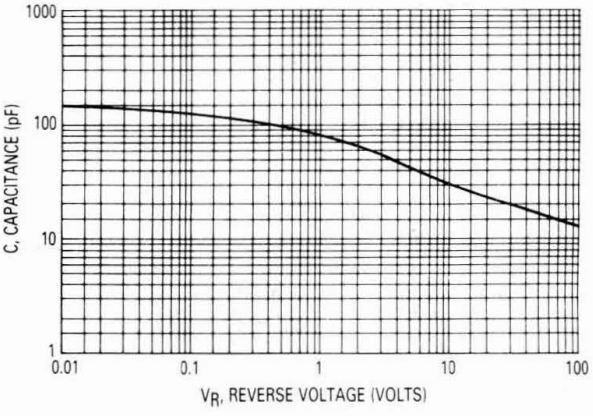

Figure 5. Typical Capacitance, Per Leg

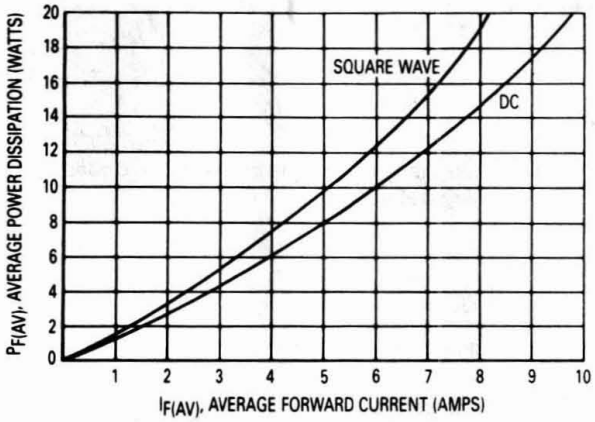

Figure 6. Forward Power Dissipation, Per Leg

Designer's™ Data Sheet
Switchmode™ Power Rectifiers

MURH860CT

Motorola Preferred Device

ULTRAFAST RECTIFIER
8.0 AMPERES
600 VOLTS

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Popular TO-220 Package
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction
- High Voltage Capability to 600 Volts
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating @ Both Case and Ambient Temperatures





CASE 221A-06
TO-220AB

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: UH860

4

MAXIMUM RATINGS, PER LEG

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	600	Volts
Average Rectified Forward Current Total Device, (Rated V_R), T_C = 120°C Total Device	$I_{F(AV)}$	4.0 8.0	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 120°C	I_{FM}	16	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	100	Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175	°C

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.0	°C/W

ELECTRICAL CHARACTERISTICS, PER LEG

Maximum Instantaneous Forward Voltage (1) (i_F = 4.0 Amps, T_C = 150°C) (i_F = 4.0 Amps, T_C = 25°C)	v_F	 2.5 2.8	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	 500 10	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amps/μs)	t_{rr}	35	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. SOA Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

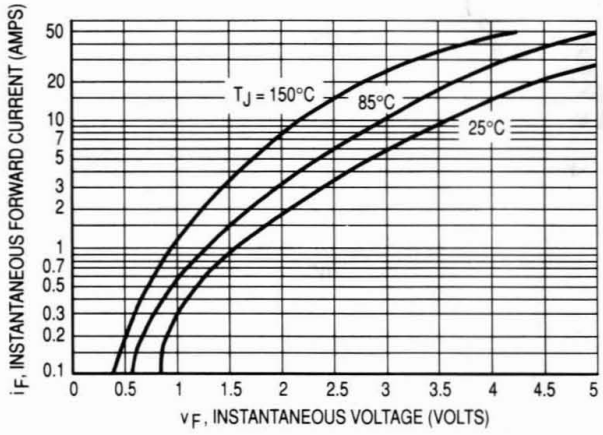

Figure 1. Typical Forward Voltage, Per Leg

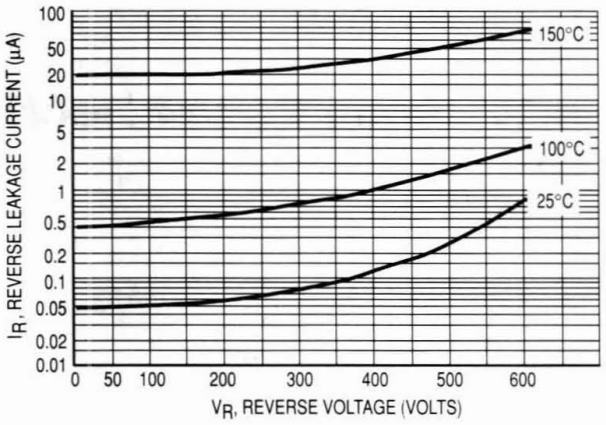

Figure 2. Typical Reverse Leakage Current, Per Leg

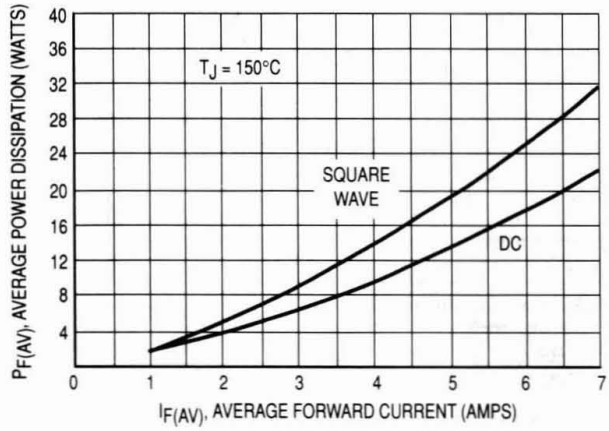

Figure 3. Typical Forward Dissipation, Per Leg

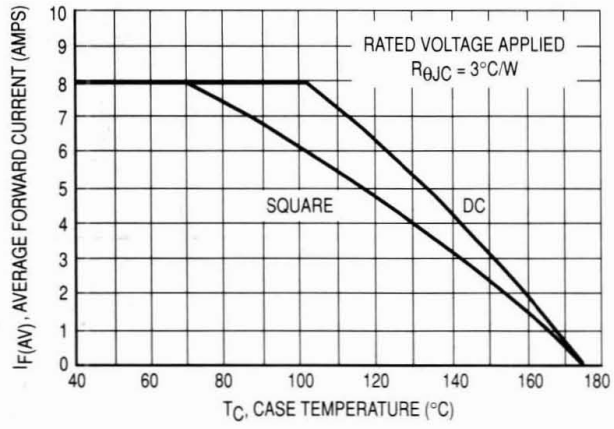

Figure 4. Typical Current Derating, Case, Per Leg

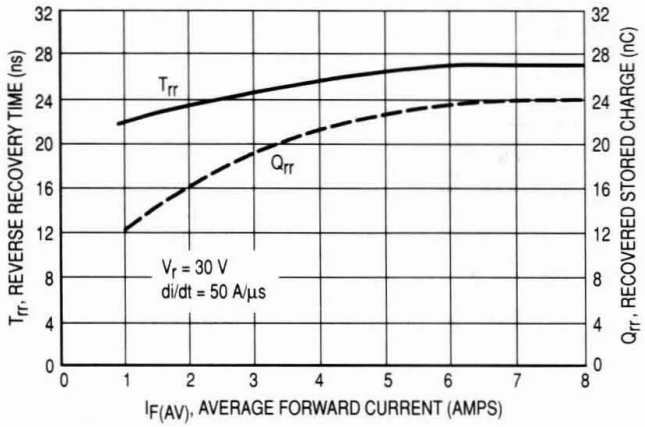

Figure 5. Typical Recovery Characteristics

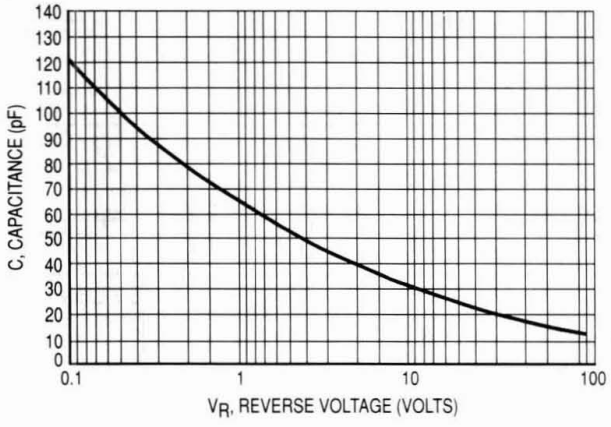

Figure 6. Typical Capacitance, Per Leg

MUR1620CT
MUR1640CT
MUR1660CT

Motorola Preferred Devices

Switchmode Power Rectifiers

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 and 60 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Popular TO-220 Package
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction
- High Voltage Capability to 600 Volts
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating @ Both Case and Ambient Temperatures

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U1620, U1640, U1660

ULTRAFAST RECTIFIERS

8 AMPERES
200–400–600 VOLTS

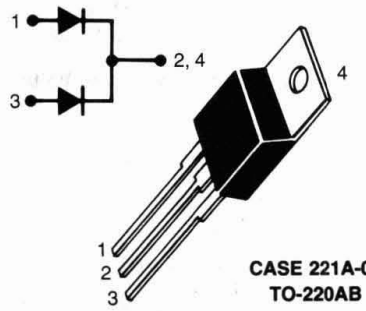

CASE 221A-06
TO-220AB

MAXIMUM RATINGS

Rating		Symbol	MUR 1620CT	MUR 1640CT	MUR 1660CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	200	400	600	Volts
Average Rectified Forward Current Total Device, (Rated V_R), T_C = 150°C	Per Leg Total Device	$I_{F(AV)}$	8.0 16			Amps
Peak Rectified Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 150°C	Per Diode Leg	I_{FM}	16			Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	100			Amps
Operating Junction Temperature and Storage Temperature		T_J, T_{stg}	−65 to +175			°C

THERMAL CHARACTERISTICS, PER DIODE LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.0	2.0		°C/W

ELECTRICAL CHARACTERISTICS, PER DIODE LEG

Maximum Instantaneous Forward Voltage (1) (i_F = 8.0 Amp, T_C = 150°C) (i_F = 8.0 Amp, T_C = 25°C)	v_F	0.895 0.975	1.00 1.30	1.20 1.50	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	250 5.0	500 10		μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 Amp)	t_{rr}	35 25	60 50		ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 2

MUR1620CT

FIGURE 1 — TYPICAL FORWARD VOLTAGE, PER LEG

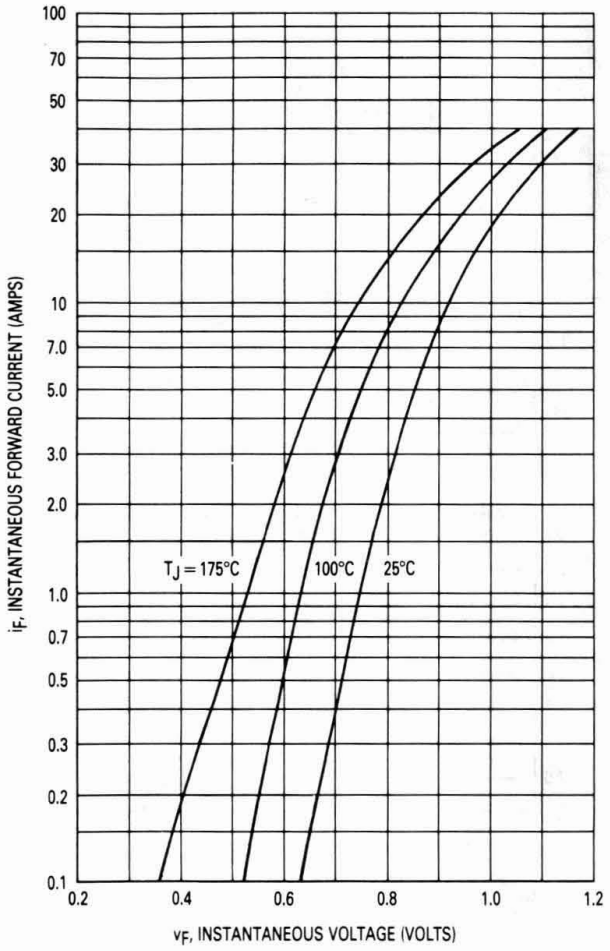

FIGURE 2 — TYPICAL REVERSE CURRENT, PER LEG*

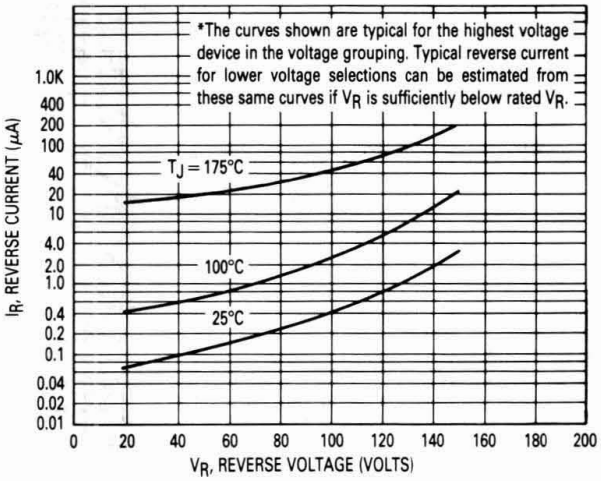

FIGURE 3 — CURRENT DERATING CASE, PER LEG

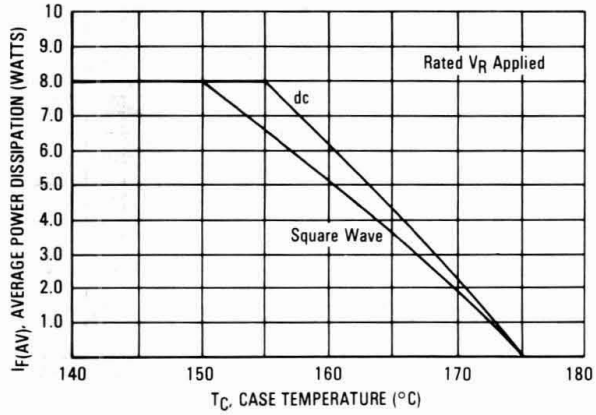

FIGURE 4 — CURRENT DERATING, AMBIENT, PER LEG

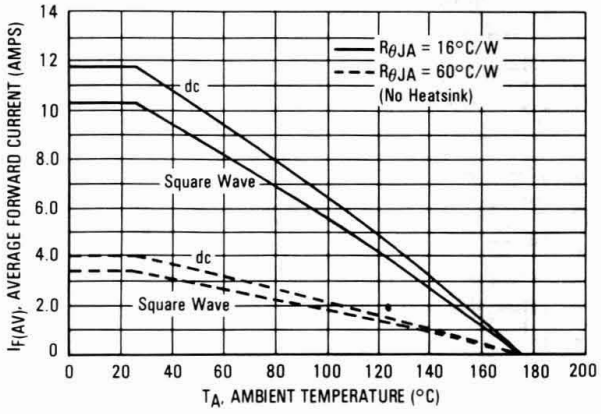

FIGURE 5 — POWER DISSIPATION, PER LEG

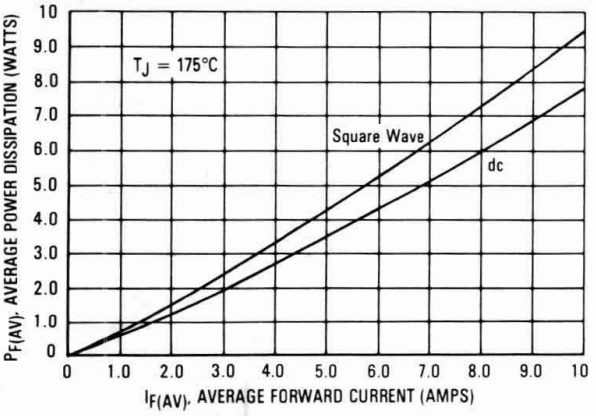

4

FIGURE 6 — TYPICAL FORWARD VOLTAGE, PER LEG

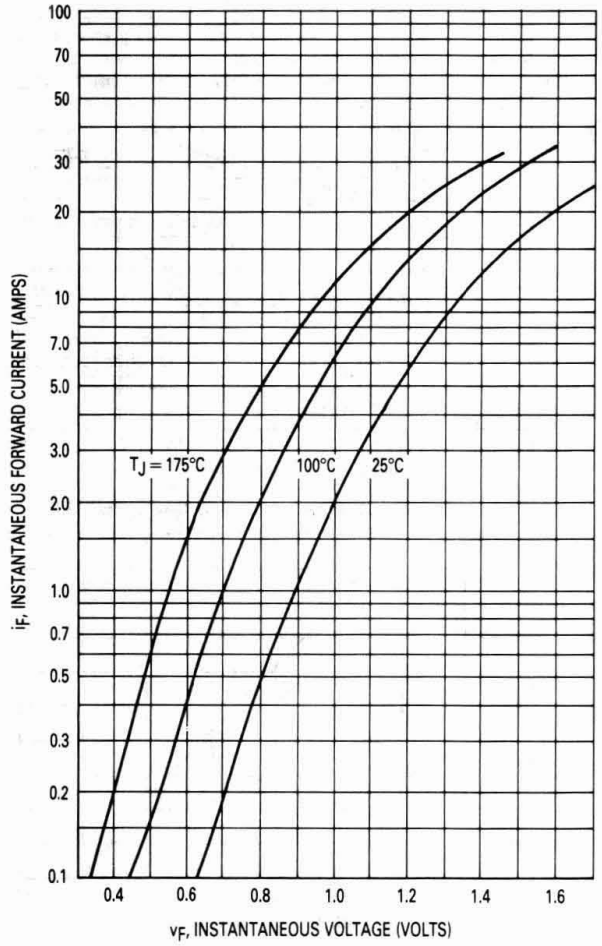

FIGURE 7 — TYPICAL REVERSE CURRENT, PER LEG*

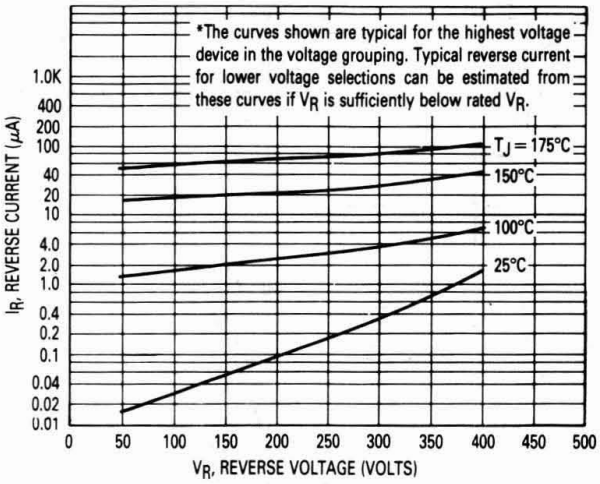

FIGURE 8 — CURRENT DERATING, CASE, PER LEG

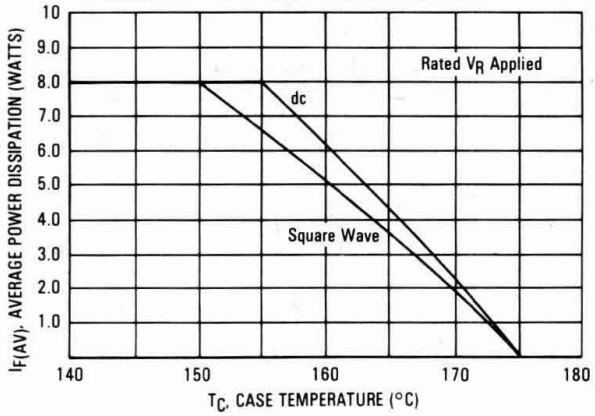

FIGURE 9 — CURRENT DERATING, AMBIENT, PER LEG

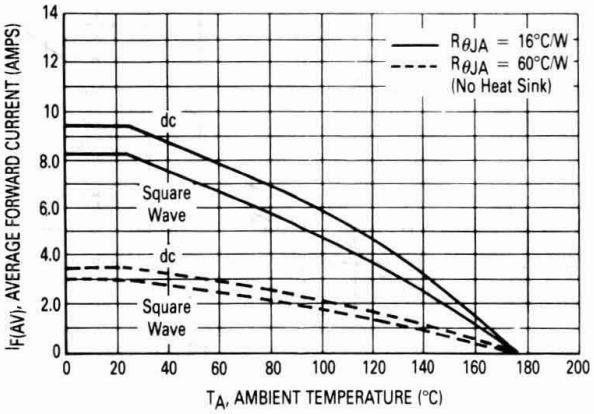

FIGURE 10 — POWER DISSIPATION, PER LEG

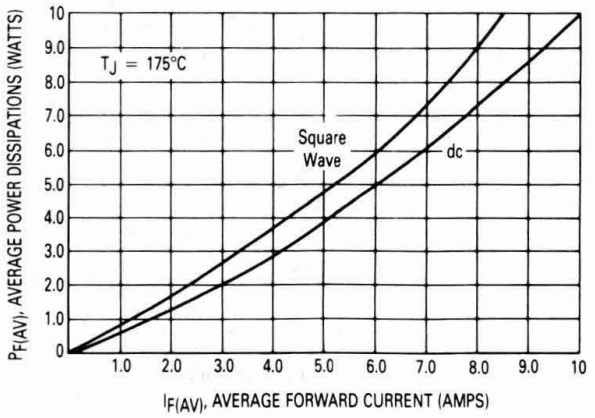

FIGURE 11 — TYPICAL FORWARD VOLTAGE, PER LEG

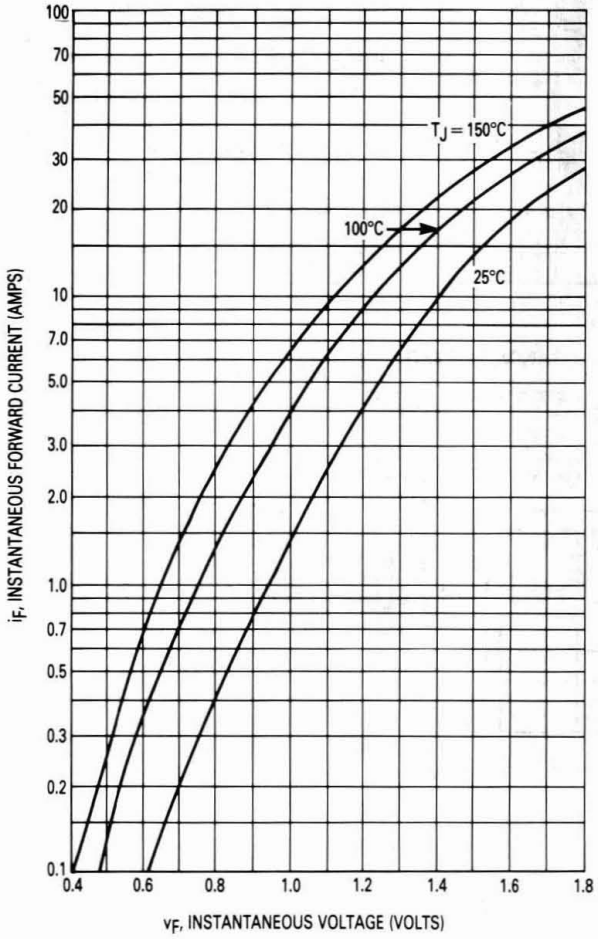

FIGURE 12 — TYPICAL REVERSE CURRENT, PER LEG*

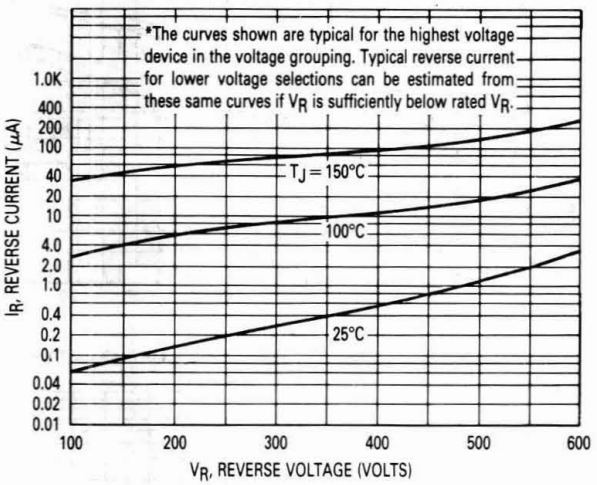

FIGURE 13 — CURRENT DERATING, CASE, PER LEG

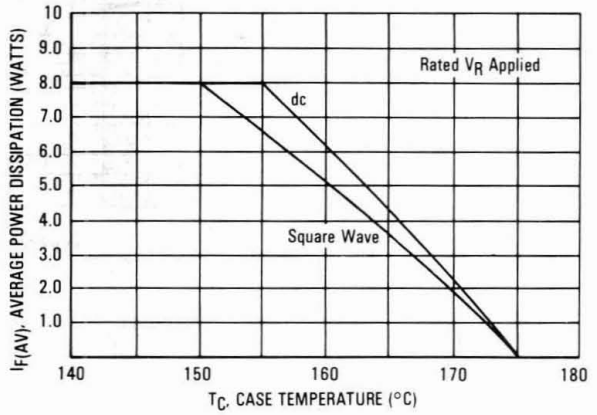

FIGURE 14 — CURRENT DERATING, AMBIENT, PER LEG

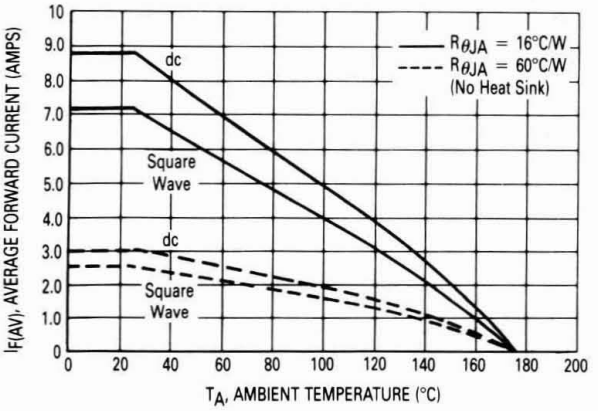

FIGURE 15 — POWER DISSIPATION, PER LEG

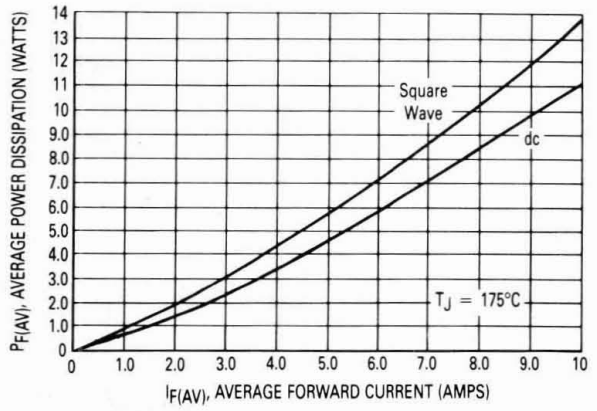

4

FIGURE 16 — THERMAL RESPONSE

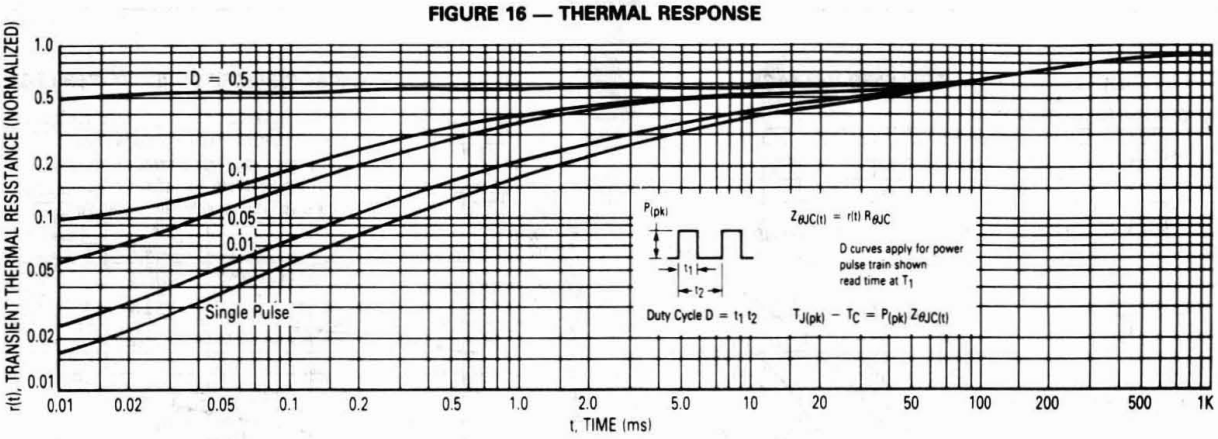

FIGURE 17 — TYPICAL CAPACITANCE, PER LEG

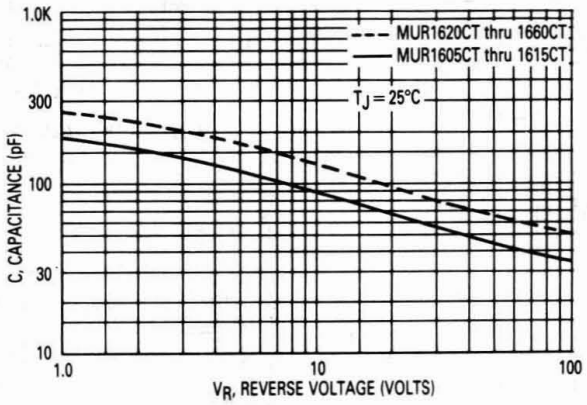

4

Switchmode
Dual Ultrafast Power Rectifiers

MUR1620CTR

Motorola Preferred Device

. . . designed for use in negative switching power supplies, inverters and as free wheeling diodes. Also, used in conjunction with common cathode dual Ultrafast Rectifiers, makes a single phase full-wave bridge. These state-of-the-art devices have the following features:

- Common Anode Dual Rectifier (8.0 A per Leg or 16 A per Package)
- Ultrafast 35 Nanosecond Reverse Recovery Times
- Exhibits Soft Recovery Characteristics
- High Temperature Glass Passivated Junction
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating @ Both Case and Ambient Temperatures
- Epoxy Meets UL94, V_O @ 1/8″
- Complement to MUR1605CT Series of Common Cathode Devices

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U1620R

ULTRAFAST RECTIFIERS
16 AMPERES
200 VOLTS



CASE 221A-06
TO-220AB
STYLE 7

4

MAXIMUM RATINGS (Per Leg)

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Voltage, (Rated V_R), T_C = 160°C Per Leg Per Total Device	$I_{F(AV)}$	8.0 16	Amps
Peak Repetitive Surge Current, Per Diode (Rated V_R, Square Wave, 20 kHz) T_C = 140°C	I_{FM}	16	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	100	Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175	°C

THERMAL CHARACTERISTICS (Per Leg)

Thermal Resistance — Junction to Case	$R_{\theta JC}$	2.0	°C/W

ELECTRICAL CHARACTERISTICS (Per Leg)

Maximum Instantaneous Forward Voltage (1) (i_F = 8.0 Amp, T_C = 25°C (i_F = 8.0 Amp, T_C = 150°C)	v_F	 1.2 1.1	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 25°C) (Rated dc Voltage, T_C = 150°C)	i_R	 5.0 500	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, di/dt = 100 Amp/μs)	t_{rr}	 85 35	ns

(1) Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

Rev 1

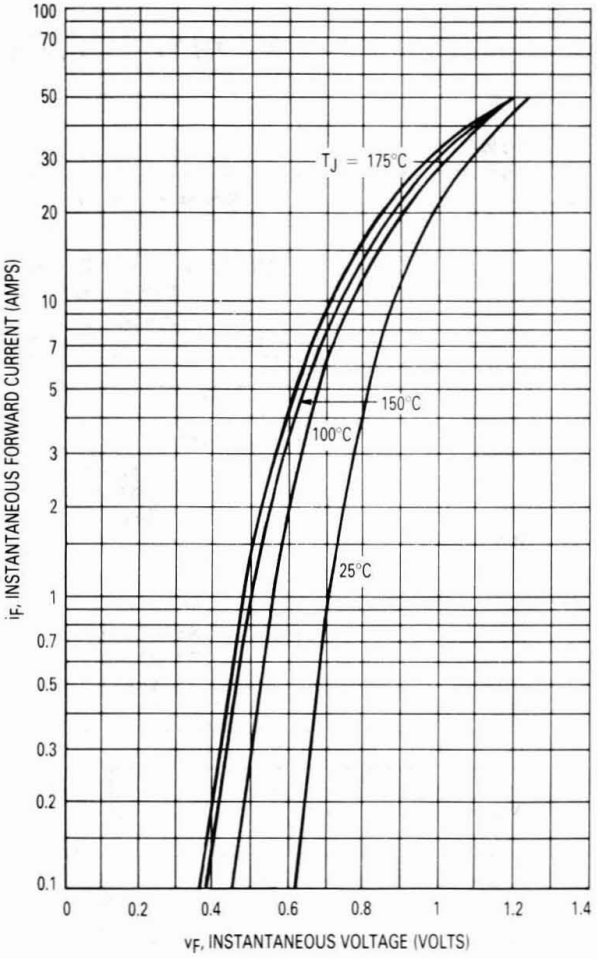

Figure 1. Typical Forward Voltage (Per Leg)

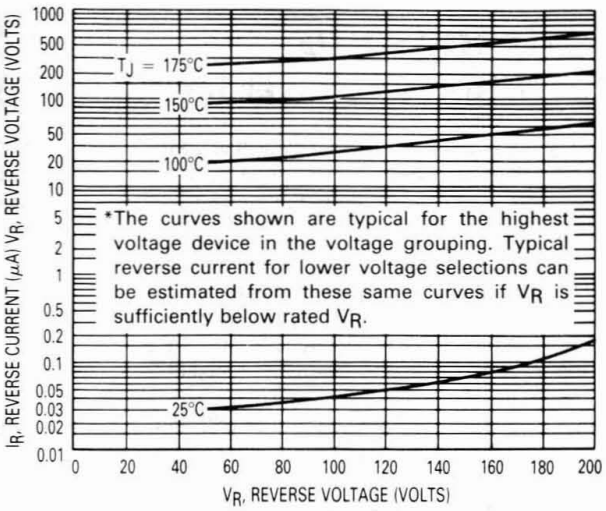

Figure 2. Typical Reverse Current* (Per Leg)

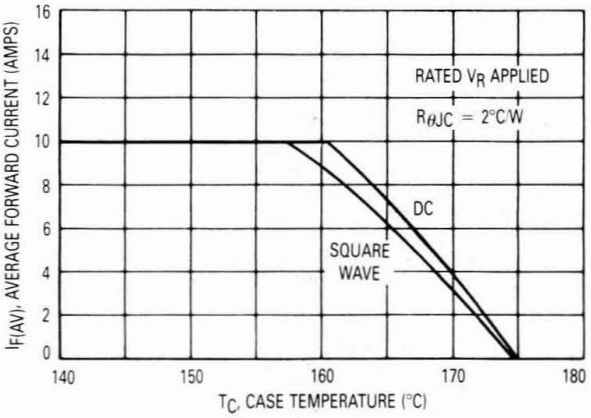

Figure 3. Current Derating, Case (Per Leg)

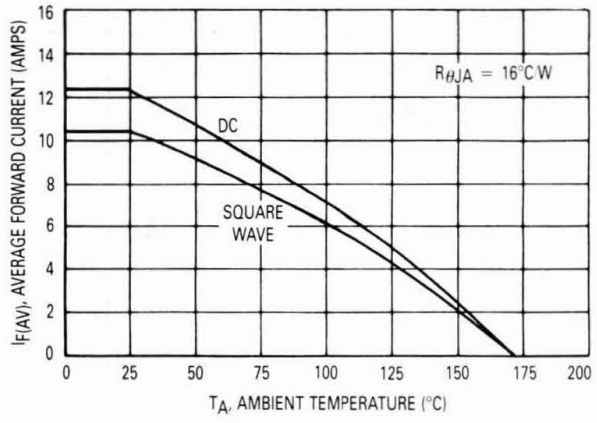

Figure 4. Current Derating, Ambient (Per Leg)

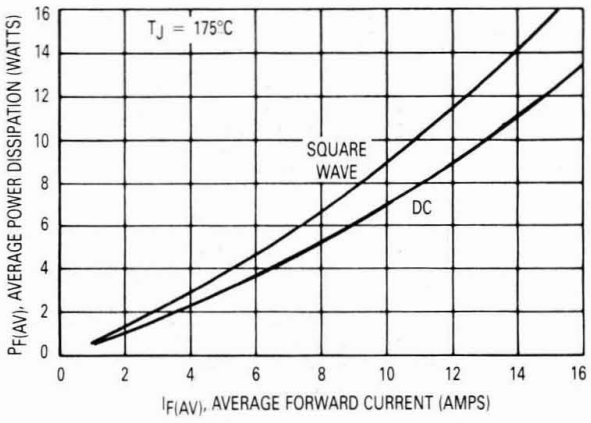

Figure 5. Power Dissipation (Per Leg)

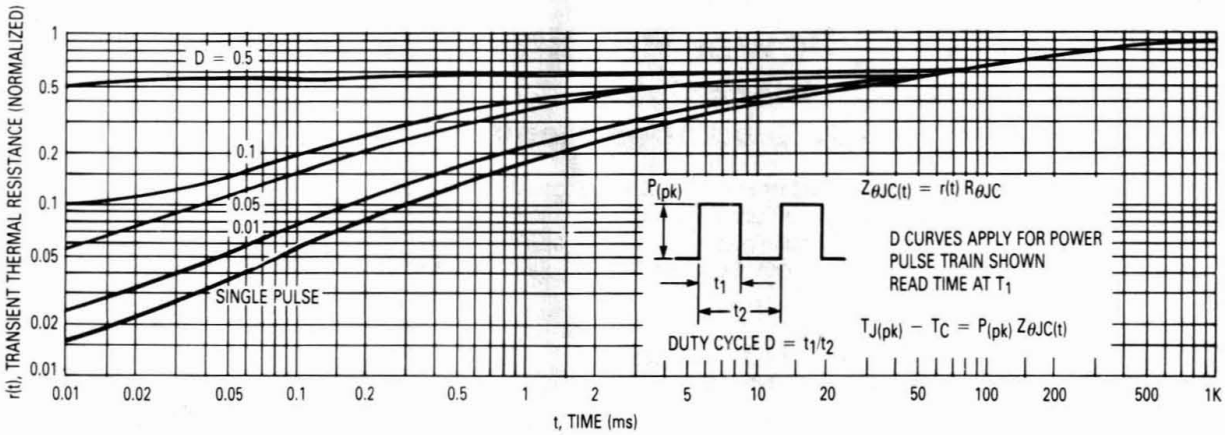

Figure 6. Thermal Response

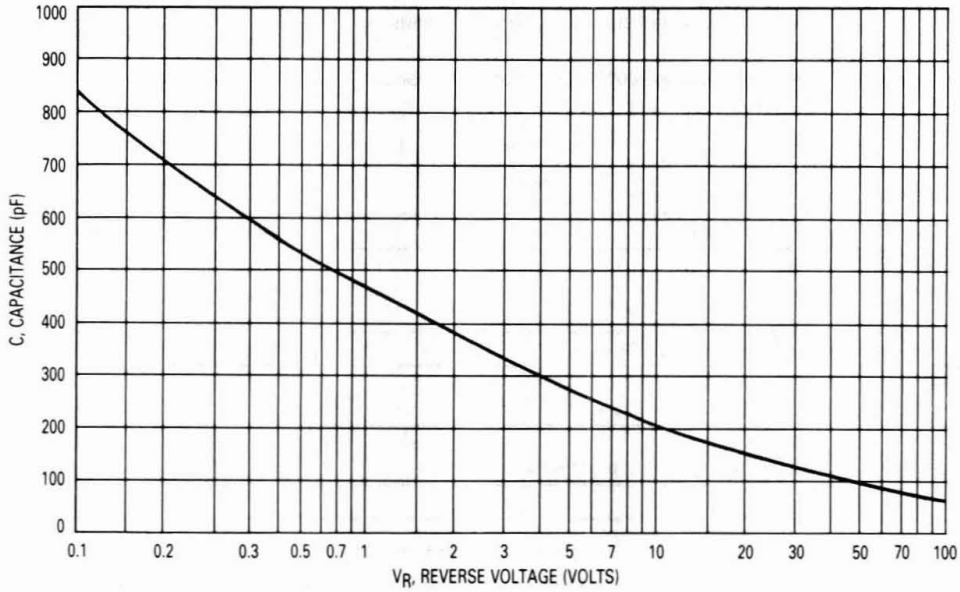

Figure 7. Typical Capacitance (Per Leg)

4

Designer's™ Data Sheet

SCANSWITCH™ Power Rectifier

For Use As A Damper Diode In High and Very High Resolution Monitors

MUR5150E

Motorola Preferred Device

SCANSWITCH RECTIFIER 5.0 AMPERES 1500 VOLTS

The MUR5150E is a state-of-the-art Ultrafast Power Rectifier specifically designed for use as a damper diode in horizontal deflection circuits for high and very high resolution monitors. In these applications, the outstanding performance of the MUR5150E is fully realized when paired with the appropriate 1500V SCANSWITCH Bipolar Power Transistor.

- 1500 V Blocking Voltage
- 20 mjoules Avalanche Energy Guaranteed
- Peak Transient Overshoot Voltage Specified, 17 Volts (typical)
- Forward Recovery Time Specified, 175 ns (typical)
- Epoxy Meets UL94, V_O at 1/8"

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U5150E



CASE 221B-02
TO-220AC

4

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	1500	Volts
Average Rectified Forward Current, (Rated V_R), T_C = 100°C	$I_{F(AV)}$	5.0	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz), T_C = 100°C	I_{FRM}	10	Amps
Non-Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	100	Amps
Operating Junction and Storage Temperature	T_J, T_{stg}	–65 to +125	°C
Controlled Avalanche Energy	W_{AVAL}	20	mJ

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case	$R_{\theta JC}$	2.0	°C/W

ELECTRICAL CHARACTERISTICS

Rating	Symbol	Typ	Max	Units
Maximum Instantaneous Forward Voltage (1) (i_F = 2.0 Amps, T_J = 25°C) (i_F = 5.0 Amps, T_J = 25°C)	v_F	 1.7 2.0	 2.0 2.4	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 125°C) (Rated dc Voltage, T_J = 25°C)	i_R	 100 10	 500 50	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amps, di/dt = 50 Amps/μs)	t_{rr}	130	175	ns
Maximum Forward Recovery Time (I_F = 6.5 Amps, di/dt = 12 Amps/μs)	t_{fr}	175	225	ns
Peak Transient Overshoot Voltage	V_{RFM}	17	20	Volts

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. SOA Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

TYPICAL ELECTRICAL CHARACTERISTICS

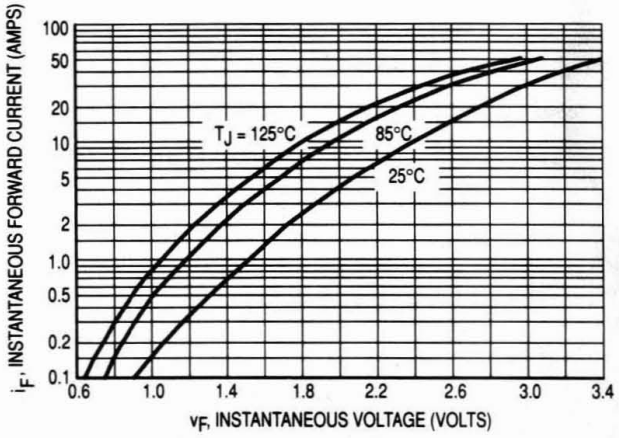

Figure 1. Typical Forward Voltage

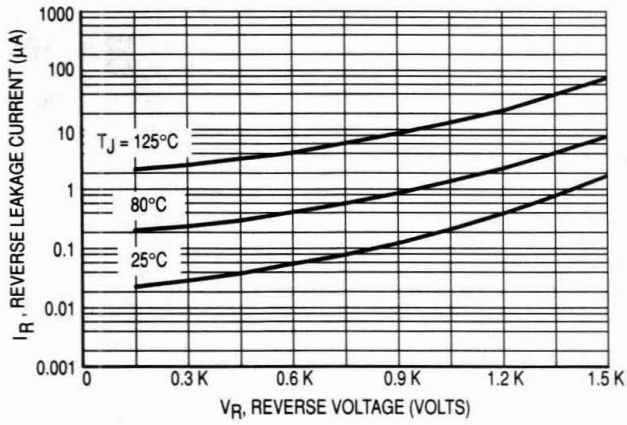

Figure 2. Typical Reverse Leakage Current

4

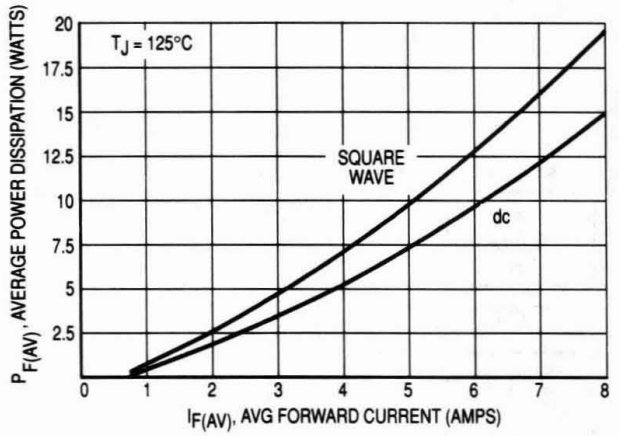

Figure 3. Forward Power Dissipation

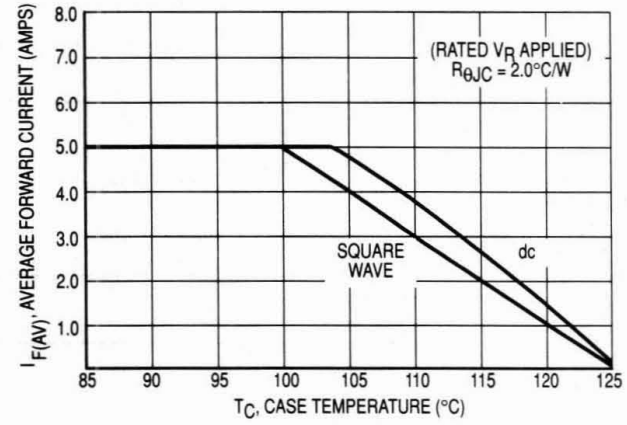

Figure 4. Current Derating Case

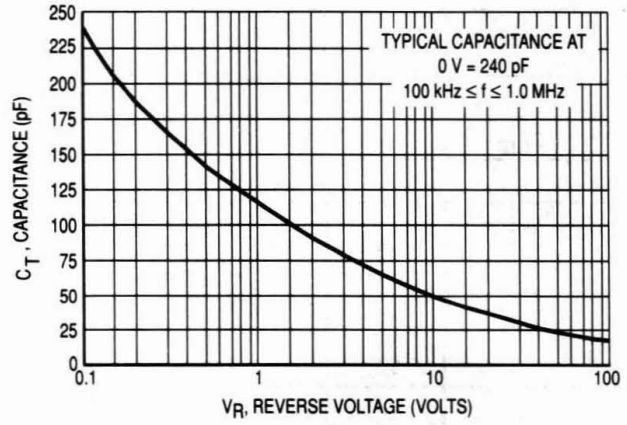

Figure 5. Typical Capacitance

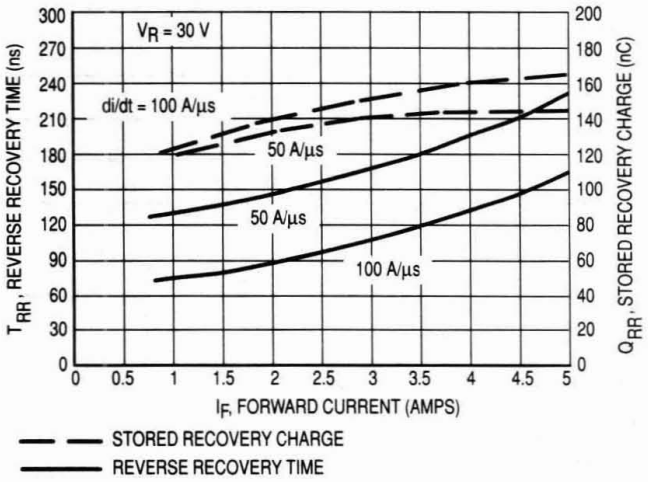

Figure 6. Typical Reverse Switching Characteristics

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MUR820
MUR840
MUR860

Motorola Preferred Devices

Switchmode Power Rectifiers

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 25, 50 and 75 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Popular TO-220 Package
- Epoxy meets UL94, V_O @ 1/8″
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 600 Volts

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U820, U840, U860

ULTRAFAST RECTIFIERS

8 AMPERES
200–400–600 VOLTS

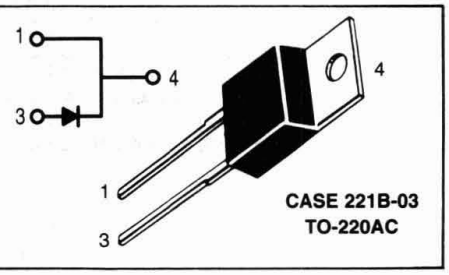

CASE 221B-03
TO-220AC

4

MAXIMUM RATINGS

Rating	Symbol	MUR 820	MUR 840	MUR 860	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	400	600	Volts
Average Rectified Forward Current Total Device, (Rated V_R), T_C = 150°C	$I_{F(AV)}$	8.0			Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 150°C	I_{FM}	16			Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	100			Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175			°C

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.0	2.0		°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 8.0 Amp, T_C = 150°C) (i_F = 8.0 Amp, T_C = 25°C)	v_F	 0.895 0.975	 1.00 1.30	 1.20 1.50	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 150°C) (Rated dc Voltage, T_J = 25°C)	i_R	 250 5.0	 500 10		μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 35 25	 60 50		ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 3

MUR820

FIGURE 1 — TYPICAL FORWARD VOLTAGE

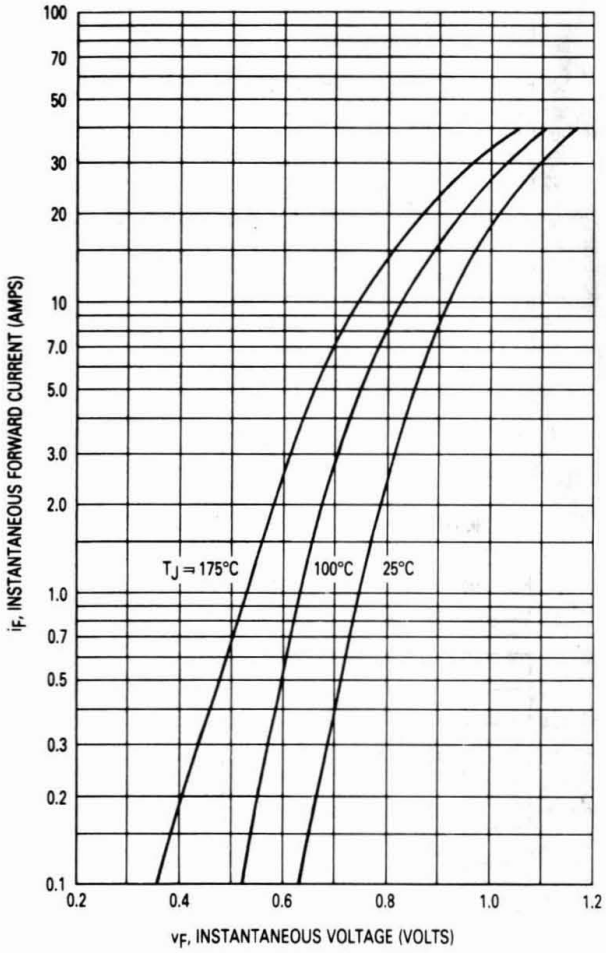

FIGURE 2 — TYPICAL REVERSE CURRENT*

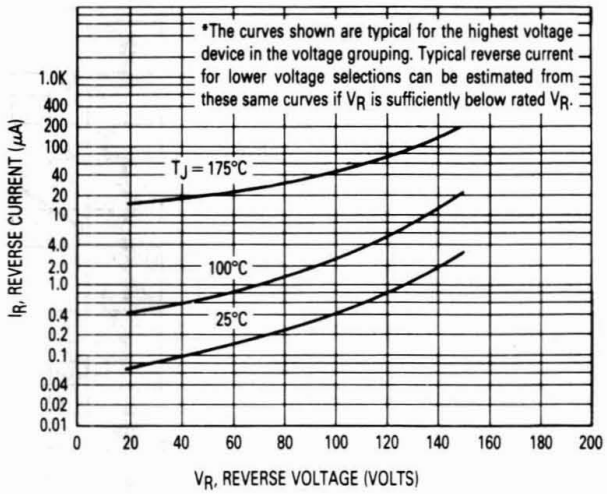

FIGURE 3 — CURRENT DERATING, CASE

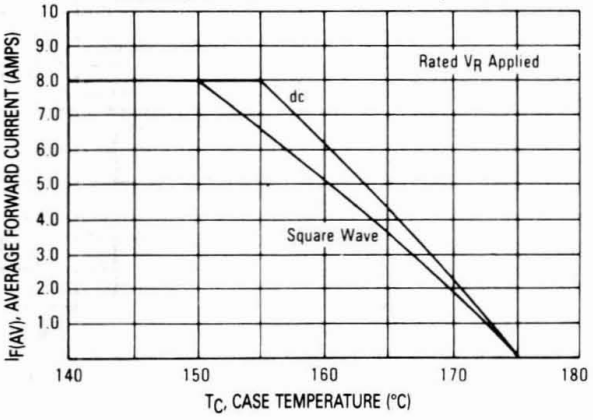

FIGURE 4 — CURRENT DERATING, AMBIENT

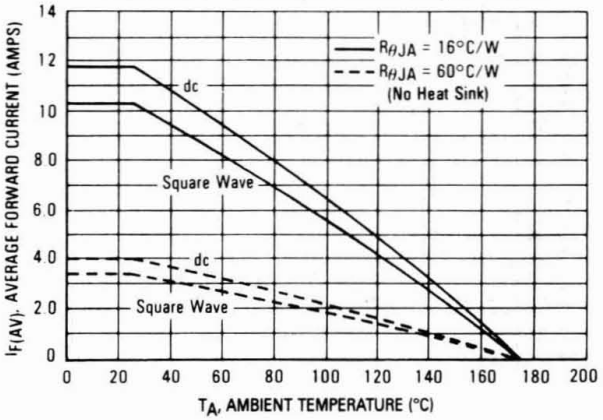

FIGURE 5 — POWER DISSIPATION

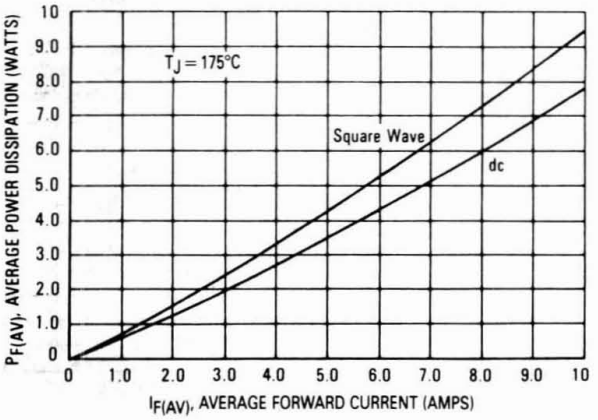

4

MUR840

FIGURE 6 — TYPICAL FORWARD VOLTAGE

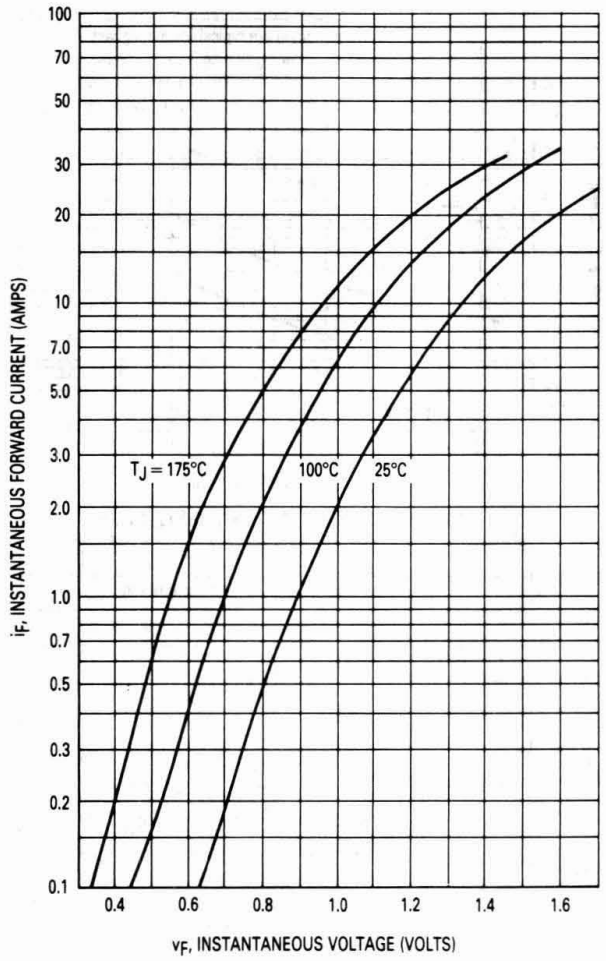

FIGURE 7 — TYPICAL REVERSE CURRENT*

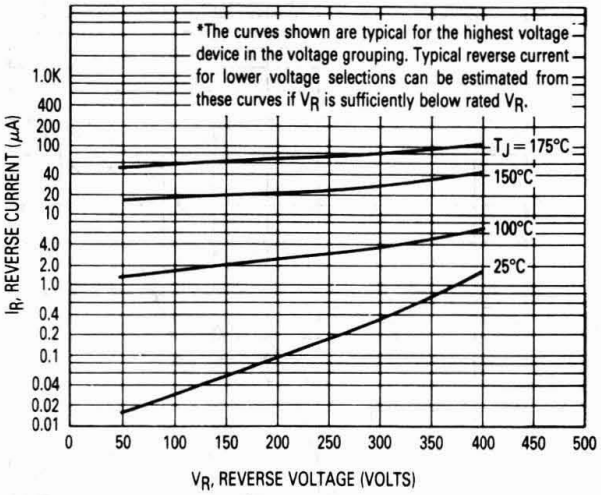

FIGURE 8 — CURRENT DERATING, CASE

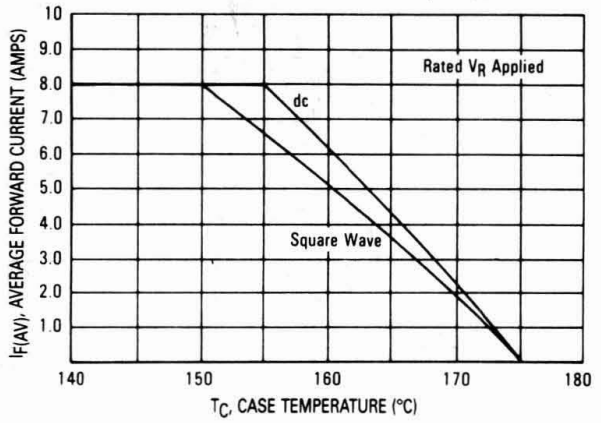

FIGURE 9 — CURRENT DERATING, AMBIENT

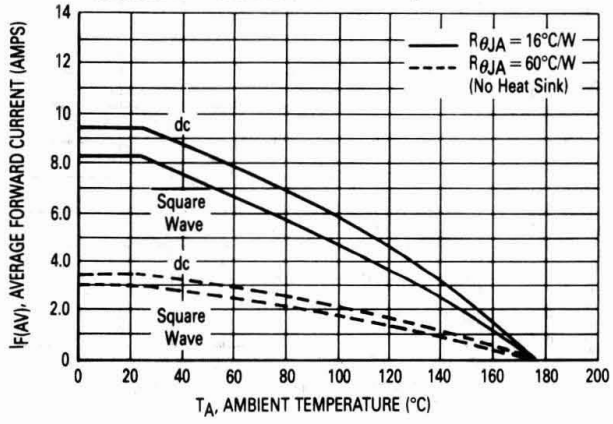

FIGURE 10 — POWER DISSIPATION

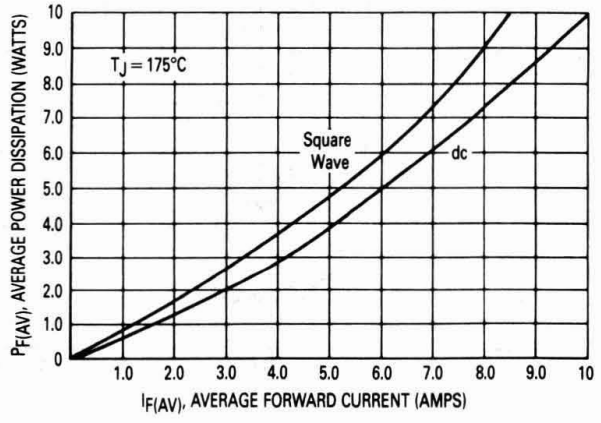

MUR860

FIGURE 11 — TYPICAL FORWARD VOLTAGE

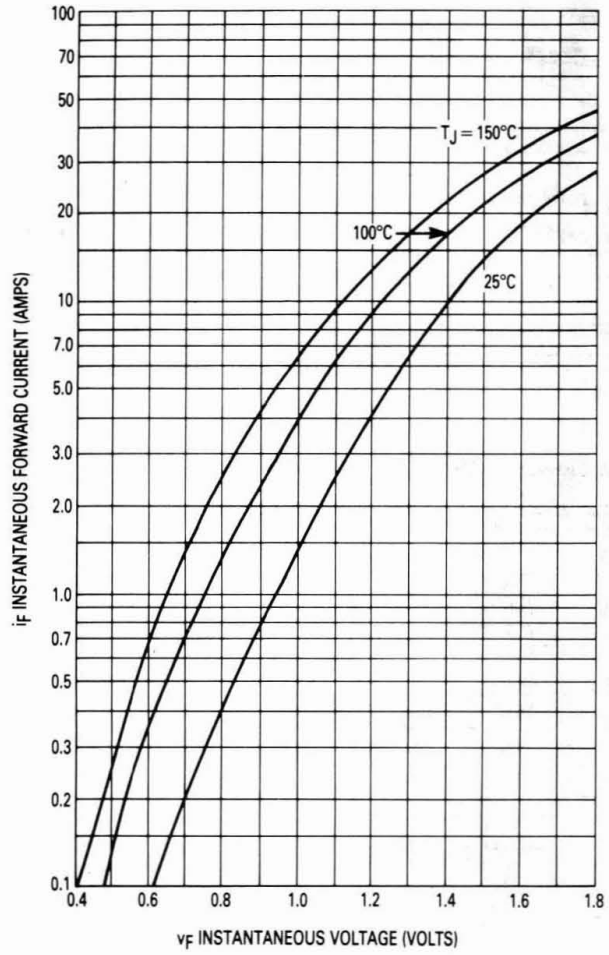

FIGURE 12 — TYPICAL REVERSE CURRENT*

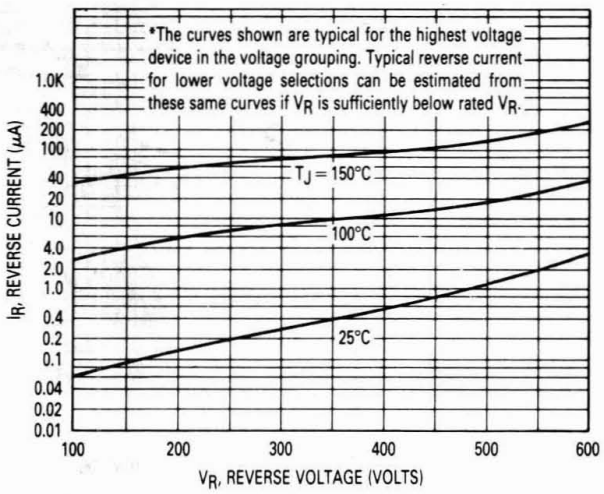

FIGURE 13 — CURRENT DERATING, CASE

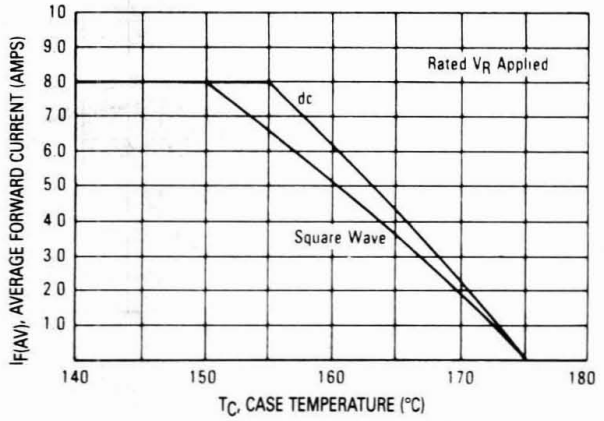

FIGURE 14 — CURRENT DERATING, AMBIENT

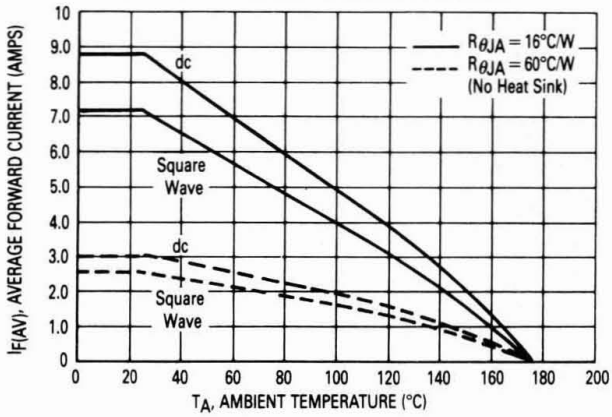

FIGURE 15 — POWER DISSIPATION

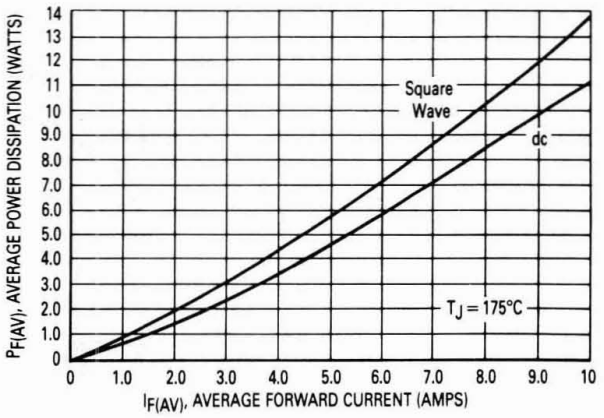

4

FIGURE 16 — THERMAL RESPONSE

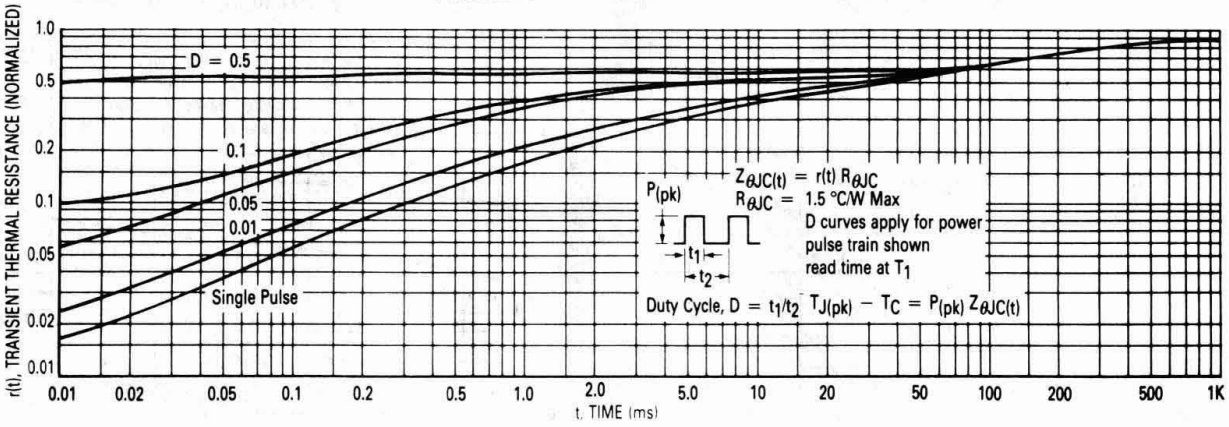

FIGURE 17 — TYPICAL CAPACITANCE

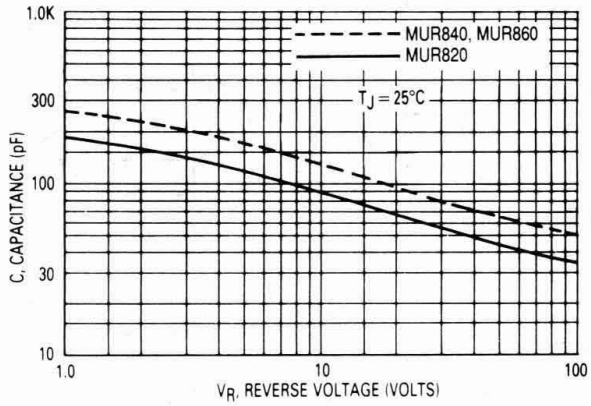

4

Switchmode Power Rectifiers Ultrafast "E" Series w/High Reverse Energy Capability

MUR890E
MUR8100E

MUR8100E is a Motorola Preferred Device

ULTRAFAST RECTIFIERS 8.0 AMPERES 900–1000 VOLTS

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- 20 mjoules Avalanche Energy Guaranteed
- Excellent Protection Against Voltage Transients in Switching Inductive Load Circuits
- Ultrafast 75 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Popular TO-220 Package
- Epoxy Meets UL94, V_O @ 1/8″
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 1000 Volts





CASE 221B-03
TO-220AC

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U890E, U8100E

MAXIMUM RATINGS

Rating	Symbol	MUR 890E	MUR 8100E	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	900	1000	Volts
Average Rectified Forward Current Total Device, (Rated V_R), T_C = 150°C	$I_{F(AV)}$	8.0		Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 150°C	I_{FM}	16		Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	100		Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175		°C

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	2.0	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 8.0 Amp, T_C = 150°C (i_F = 8.0 Amp, T_C = 25°C)	v_F	 1.5 1.8	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 100°C) (Rated dc Voltage, T_C = 25°C)	i_R	 500 25	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 100 75	ns
Controlled Avalanche Energy (See Test Circuit in Figure 6)	W_{AVAL}	20	mJ

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 1

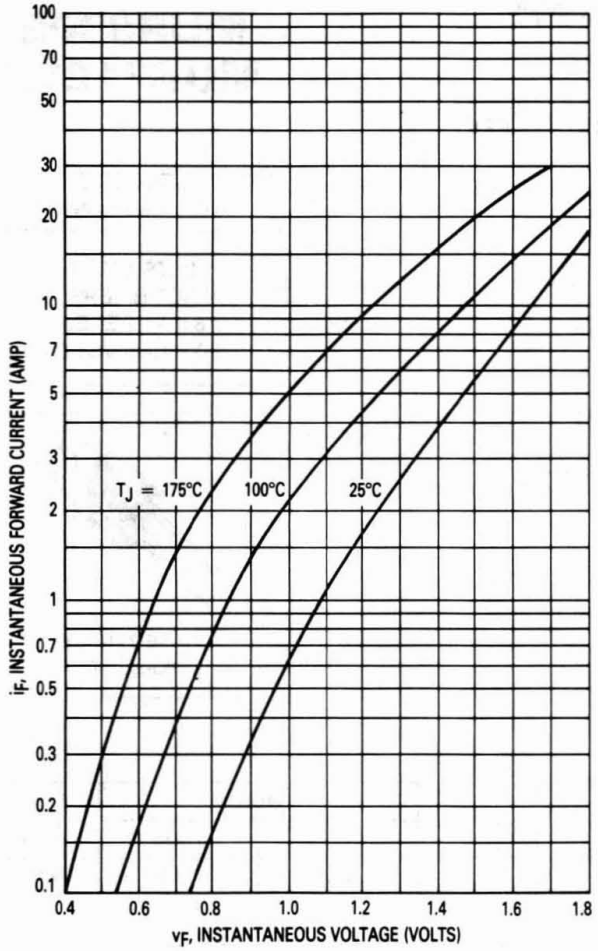

Figure 1. Typical Forward Voltage

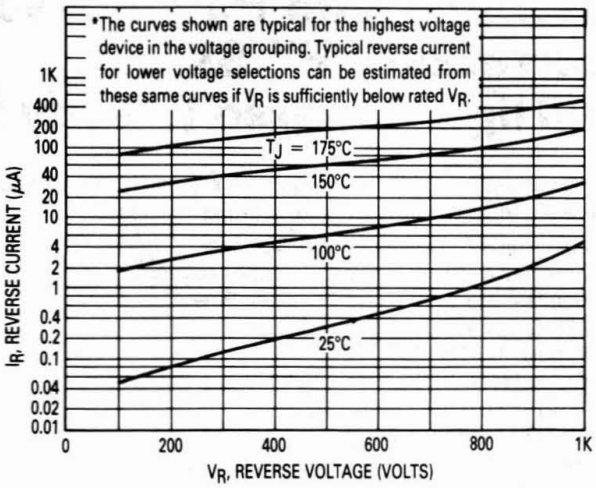

Figure 2. Typical Reverse Current*

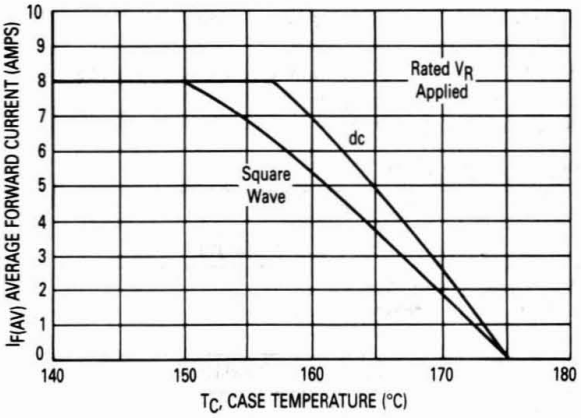

Figure 3. Current Derating, Case

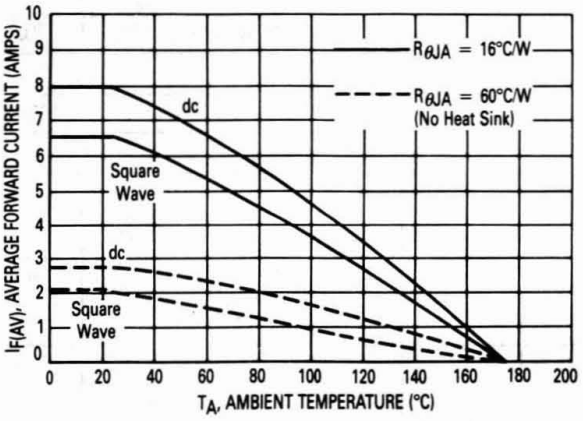

Figure 4. Current Derating, Ambient

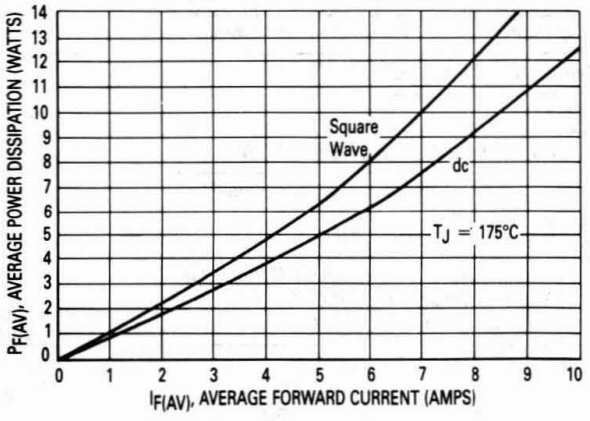

Figure 5. Power Dissipation

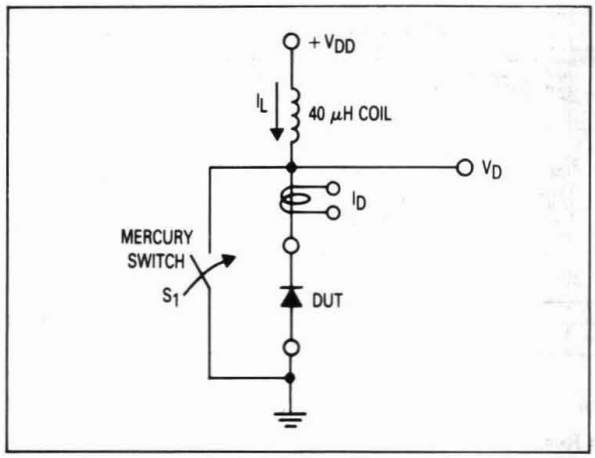

Figure 6. Test Circuit

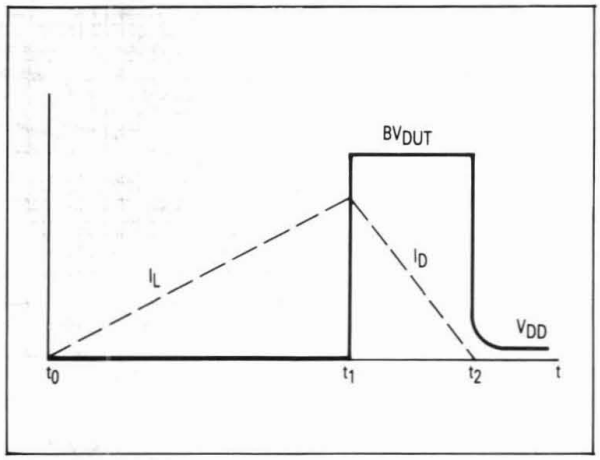

Figure 7. Current-Voltage Waveforms

The unclamped inductive switching circuit shown in Figure 6 was used to demonstrate the controlled avalanche capability of the new "E" series Ultrafast rectifiers. A mercury switch was used instead of an electronic switch to simulate a noisy environment when the switch was being opened.

When S_1 is closed at t_0 the current in the inductor I_L ramps up linearly; and energy is stored in the coil. At t_1 the switch is opened and the voltage across the diode under test begins to rise rapidly, due to di/dt effects, when this induced voltage reaches the breakdown voltage of the diode, it is clamped at BV_{DUT} and the diode begins to conduct the full load current which now starts to decay linearly through the diode, and goes to zero at t_2.

By solving the loop equation at the point in time when S_1 is opened; and calculating the energy that is transferred to the diode it can be shown that the total energy transferred is equal to the energy stored in the inductor plus a finite amount of energy from the V_{DD} power supply while the diode is in breakdown (from t_1 to t_2) minus any losses due to finite component resistances. Assuming the component resistive elements are small Equation (1) approximates the total energy transferred to the diode. It can be seen from this equation that if the V_{DD} voltage is low compared to the breakdown voltage of the device, the amount of energy contributed by the supply during breakdown is small and the total energy can be assumed to be nearly equal to the energy stored in the coil during the time when S_1 was closed, Equation (2).

The oscilloscope picture in Figure 8, shows the MUR8100E in this test circuit conducting a peak current of one ampere at a breakdown voltage of 1300 volts, and using Equation (2) the energy absorbed by the MUR8100E is approximately 20 mjoules.

Although it is not recommended to design for this condition, the new "E" series provides added protection against those unforeseen transient viruses that can produce unexplained random failures in unfriendly environments.

EQUATION (1):

$$W_{AVAL} \approx \frac{1}{2} LI_{LPK}^2 \left(\frac{BV_{DUT}}{BV_{DUT} - V_{DD}} \right)$$

EQUATION (2):

$$W_{AVAL} \approx \frac{1}{2} LI_{LPK}^2$$

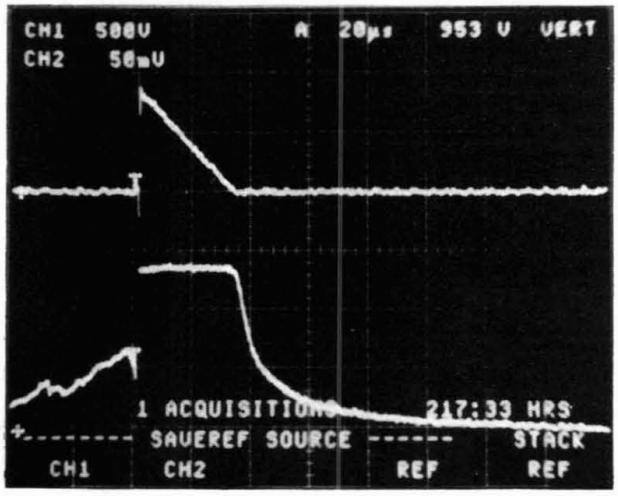

Figure 8. Current-Voltage Waveforms

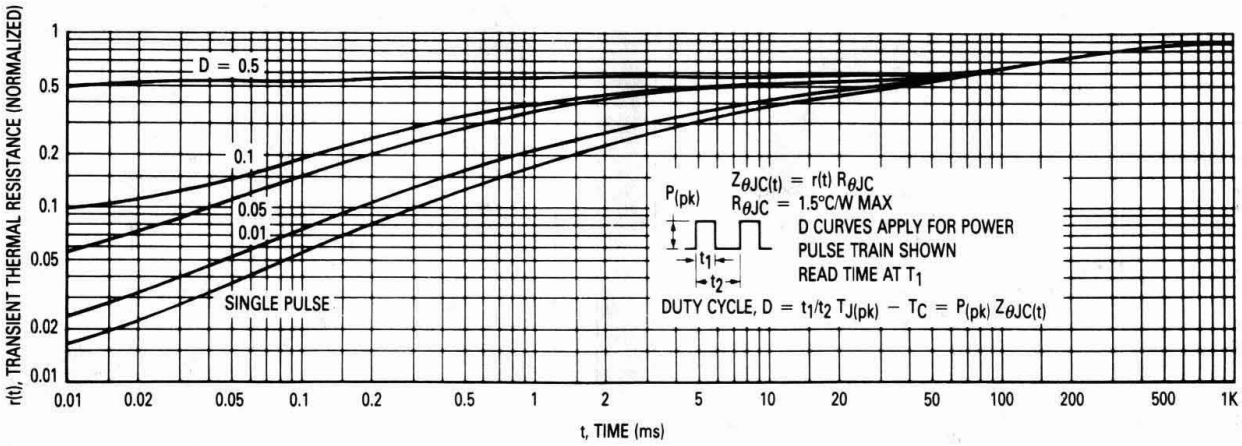

Figure 9. Thermal Response

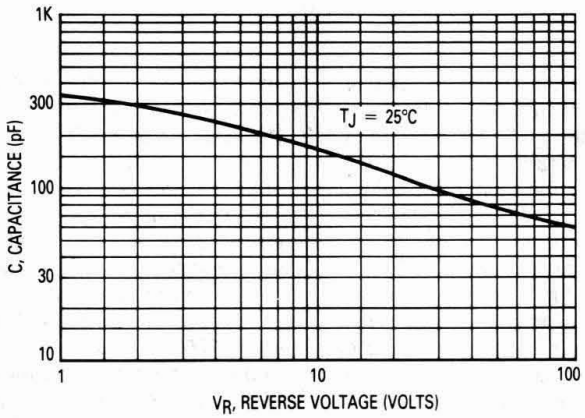

Figure 10. Typical Capacitance

SCANSWITCH™

Power Rectifier For High and Very High Resolution Monitors

MUR10120E

Motorola Preferred Device

This state-of-the-art power rectifier is specifically designed for use as a damper diode in horizontal deflection circuits for high and very high resolution monitors. In these applications, the outstanding performance of the MUR10120E is fully realized when paired with either the MJH16206 or MJF16206 monitor specific, 1200 volt bipolar power transistor.

- 1200 Volt Blocking Voltage
- 20 mJ Avalanche Energy (Guaranteed)
- 12 Volt (Typical) Peak Transient Overshoot Voltage
- 135 ns (Typical) Forward Recovery Time



Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U10120E

SCANSWITCH RECTIFIER 10 AMPERES 1200 VOLTS



CASE 221B-03
(TO-220AC)
STYLE 1

4

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	1200	Volts
Average Rectified Forward Current (Rated V_R) T_C = 125°C	$I_{F(AV)}$	10	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz) T_C = 125°C	I_{FRM}	20	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	100	Amps
Operating Junction Temperature	T_J	−65 to +125	°C
Controlled Avalanche Energy	W_{AVAL}	20	mJ

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case	$R_{\theta JC}$	2.0	°C/W

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Typ	Max	Unit
Maximum Instantaneous Forward Voltage (1) (I_F = 6.5 Amps, T_J = 125°C) (I_F = 6.5 Amps, T_J = 25°C)	v_F	 1.7 1.9	 2.0 2.2	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_J = 25°C) (Rated dc Voltage, T_J = 125°C)	i_R	 25 750	 100 1000	μA
Maximum Reverse Recovery Time (I_F = 1.0 A, di/dt = 50 Amps/μs)	t_{rr}	150	175	ns
Maximum Forward Recovery Time I_F = 6.5 Amps, di/dt = 12 Amps/μs (As Measured on a Deflection Circuit)	t_{fr}	135	175	ns
Peak Transient Overshoot Voltage	V_{RFM}	12	14	Volts

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Rev 1

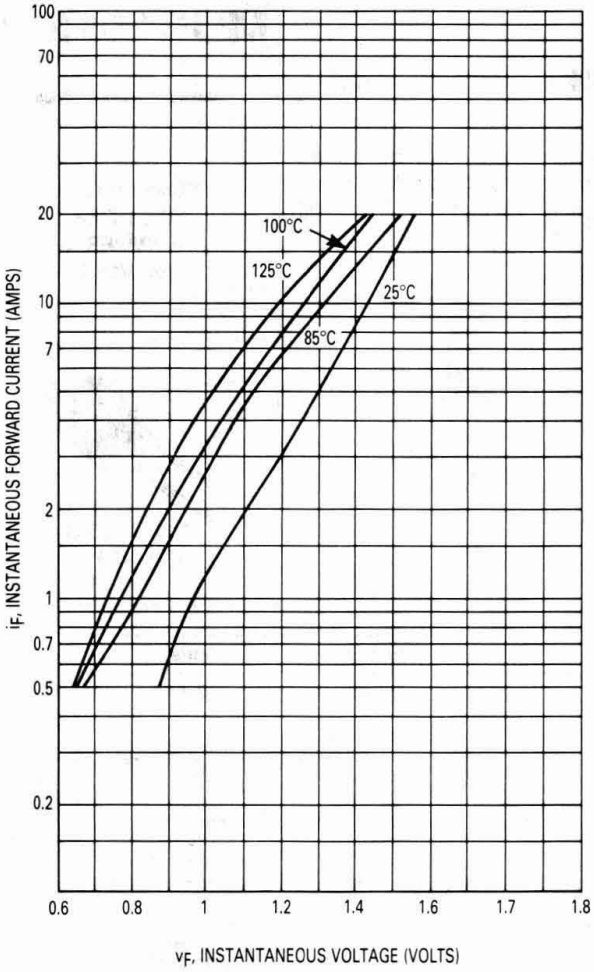

Figure 1. Typical Forward Voltage

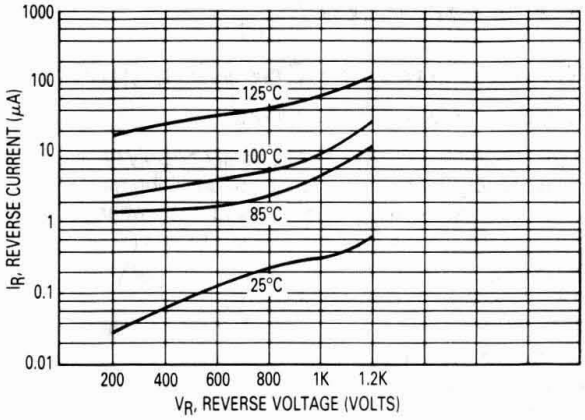

Figure 2. Typical Reverse Current

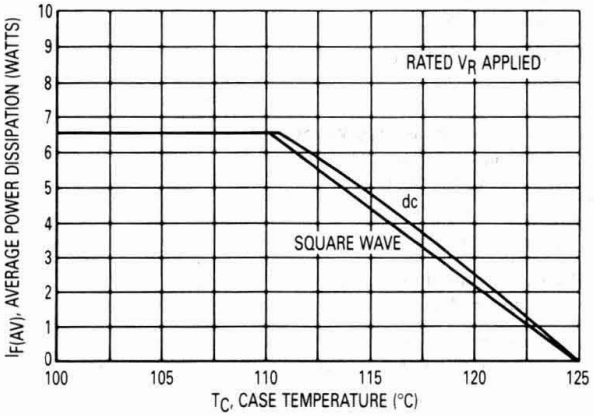

Figure 3. Current Derating, Case

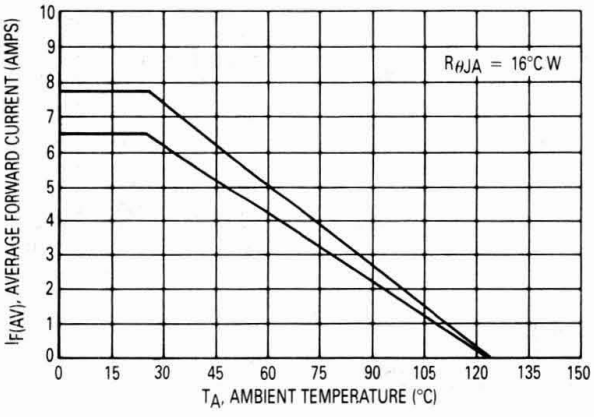

Figure 4. Current Derating, Ambient

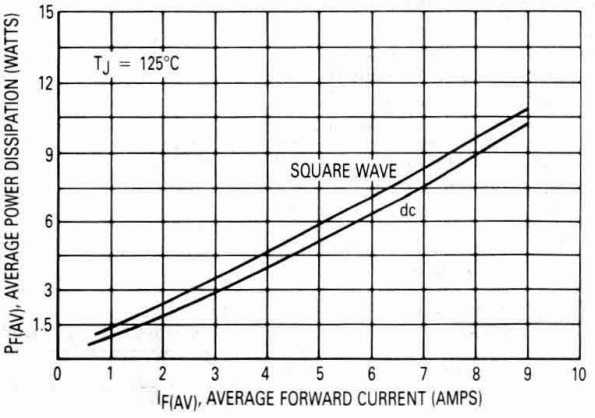

Figure 5. Power Dissipation

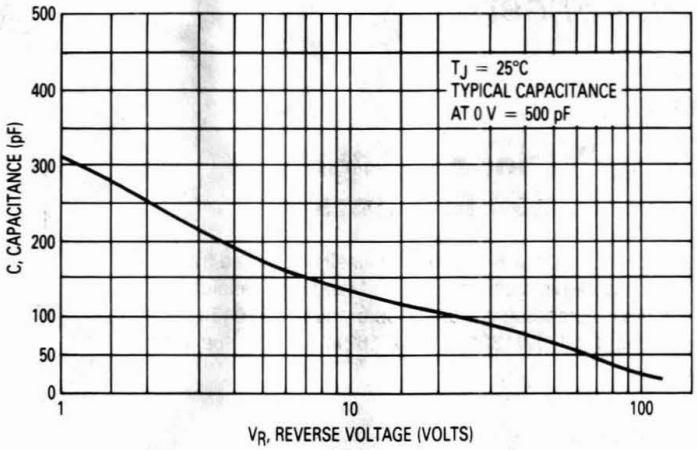

Figure 6. Typical Capacitance

Designer's™ Data Sheet
SCANSWITCH™ Power Rectifier
For Use As A Damper Diode In High And Very High Resolution Monitors

MUR10150E

Motorola Preferred Device

SCANSWITCH RECTIFIERS 10 AMPERES 1500 VOLTS



CASE 221B-02 TO-220AC

The MUR10150E is a state-of-the-art Power Rectifier specifically designed for use as a damper diode in horizontal deflection circuits for high and very high resolution monitors. In these applications, the outstanding performance of the MUR10150E is fully realized when paired with either the MJW16212 or MJF16212 monitor specific, 1500 V bipolar power transistor.

- 1500 V Blocking Voltage
- 20 mJ Avalanche Energy Guaranteed
- Peak Transient Overshoot Voltage Specified, 14 Volt (typical)
- Forward Recovery Time Specified, 135 ns (typical)
- Epoxy Meets UL94, V_O at 1/8″



Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U10150E

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	1500	Volts
Average Rectified Forward Current, (Rated V_R), T_C = 125°C	$I_{F(AV)}$	10	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz), T_C = 125°C	I_{FRM}	20	Amps
Non-repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	100	Amps
Operating Junction and Storage Temperature	T_J, T_{stg}	−65 to +125	°C
Controlled Avalanche Energy	W_{AVAL}	20	mJ

THERMAL CHARACTERISTICS

Thermal Resistance — Junction to Case	$R_{\theta JC}$	2.0	°C/W

ELECTRICAL CHARACTERISTICS

Rating		Symbol	Typ	Max	Unit
Maximum Instantaneous Forward Voltage (1)	(i_F = 6.5 Amps, T_J = 125°C) (i_F = 6.5 Amps, T_J = 25°C)	v_F	1.7 1.9	2.2 2.4	Volts
Maximum Instantaneous Reverse Current (1)	(Rated dc Voltage, T_J = 125°C) (Rated dc Voltage, T_J = 25°C)	i_R	750 25	1000 100	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amps/μs)		t_{rr}	150	175	ns
Maximum Forward Recovery Time (I_F = 6.5 Amp, di/dt = 12 Amps/μs)		t_{fr}	135	175	ns
Peak Transient Overshoot Voltage		V_{RFM}	14	16	Volts

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%.

Designer's Data for "Worst Case" Conditions — The Designer's Data Sheet permits the design of most circuits entirely from the information presented. SOA Limit curves — representing boundaries on device characteristics — are given to facilitate "worst case" design.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

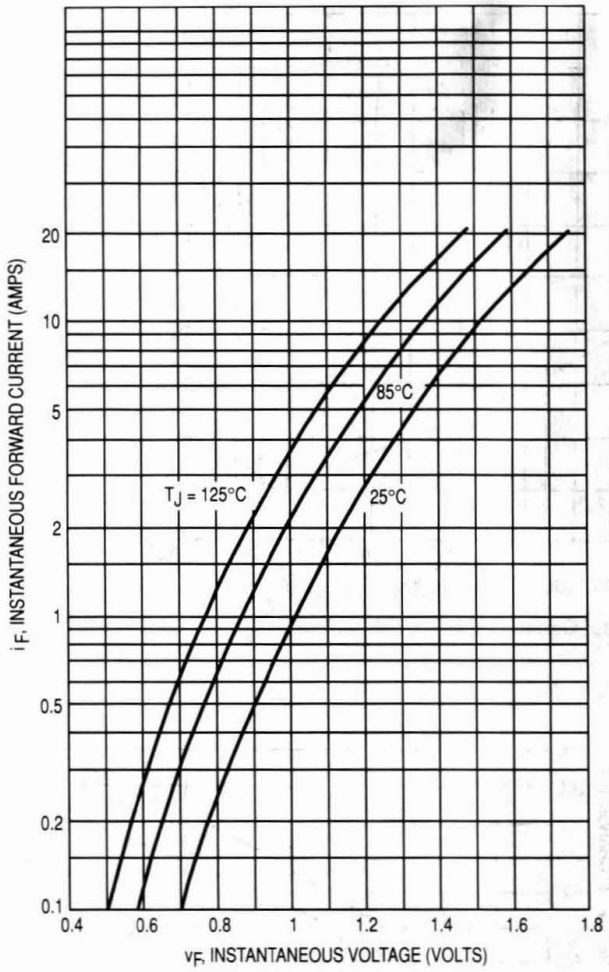

Figure 1. Typical Forward Voltage

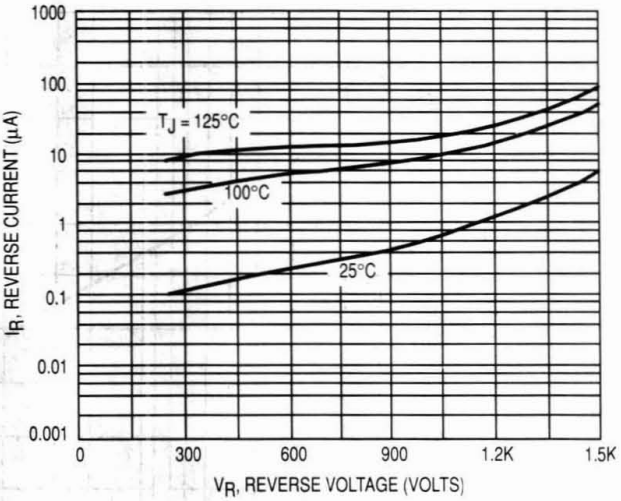

Figure 2. Typical Reverse Current

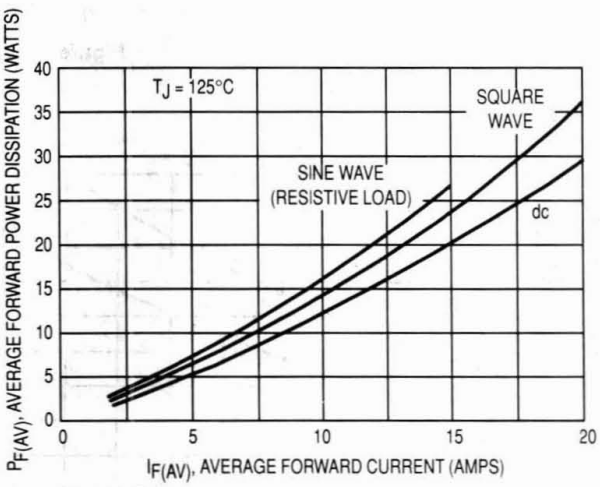

Figure 3. Forward Power Dissipation

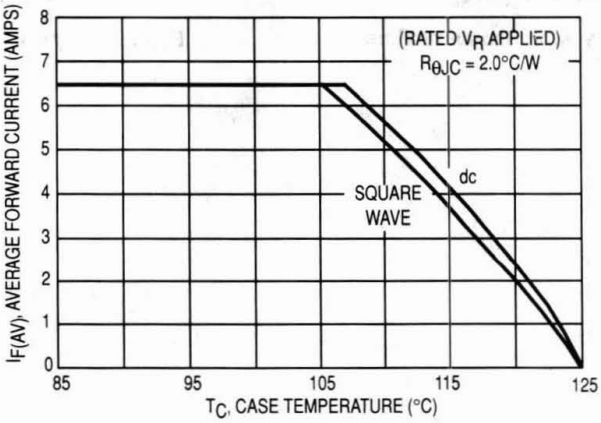

Figure 4. Current Derating Case

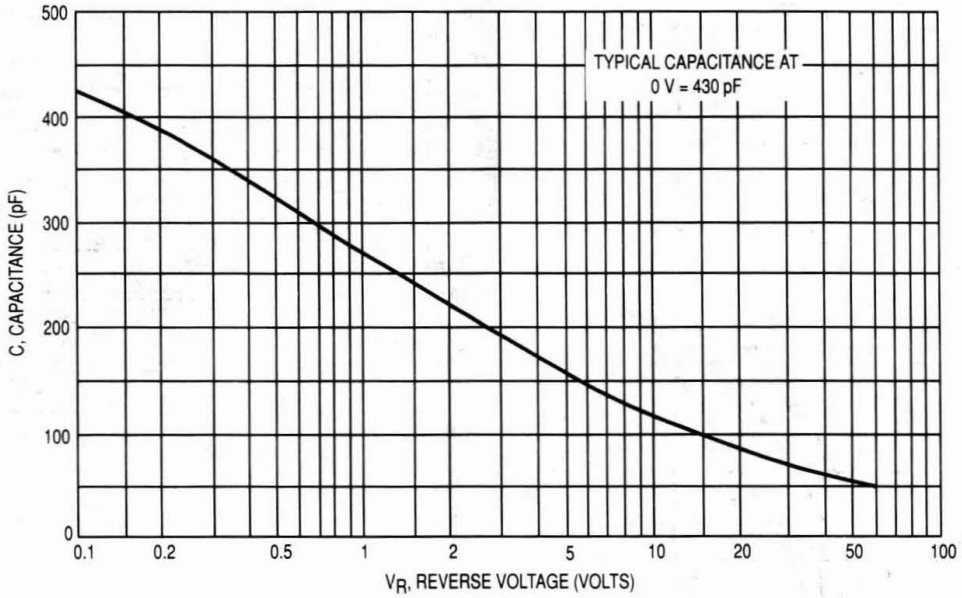

Figure 5. Typical Capacitance

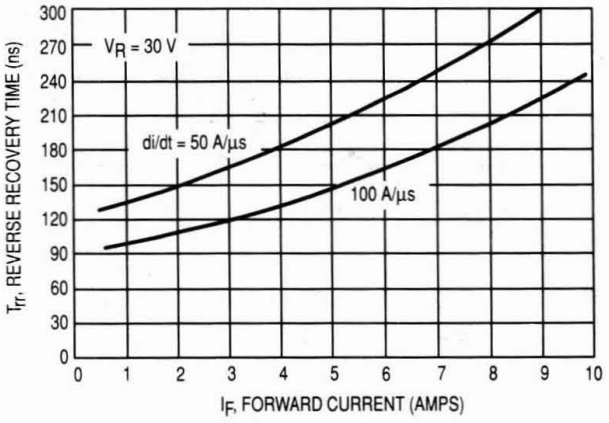

Figure 6. Typical Reverse Recovery Time

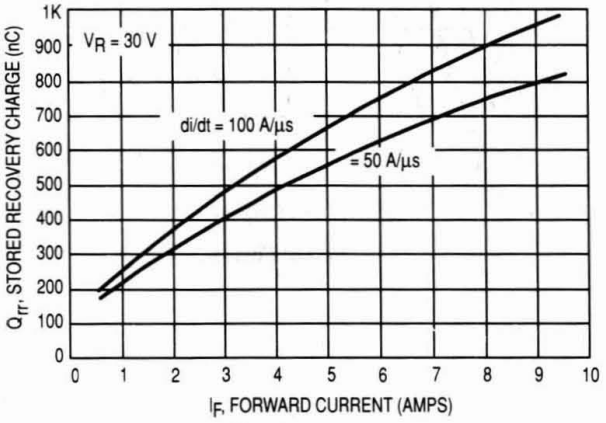

Figure 7. Typical Stored Recovery Charge

MUR1520
MUR1540
MUR1560

Motorola Preferred Devices

Switchmode Power Rectifiers

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 and 60 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Popular TO-220 Package
- High Voltage Capability to 600 Volts
- Low Forward Drop
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating Specified @ Both Case and Ambient Temperatures

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U1520, U1540, U1560

ULTRAFAST RECTIFIERS

15 AMPERES
200–400–600 VOLTS

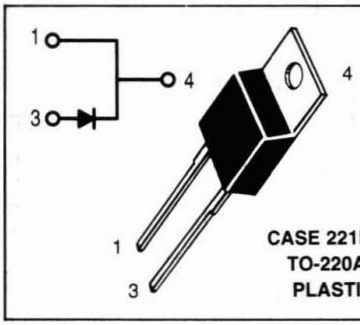

CASE 221B-03
TO-220AC
PLASTIC

4

MAXIMUM RATINGS

Rating	Symbol	MUR 1520	MUR 1540	MUR 1560	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	400	600	Volts
Average Rectified Forward Current (Rated V_R)	$I_{F(AV)}$	15 @ T_C = 150°C		15 @ T_C = 145°C	Amps
Peak Rectified Forward Current (Rated V_R, Square Wave, 20 kHz)	I_{FRM}	30 @ T_C = 150°C		30 @ T_C = 145°C	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	200	150		Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175			°C

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.5	°C/W

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) (i_F = 15 Amp, T_C = 150°C) (i_F = 15 Amp, T_C = 25°C)	v_F	 0.85 1.05	 1.12 1.25	 1.20 1.50	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	 500 10	 500 10	 1000 10	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs)	t_{rr}	35	60		ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

Rev 1

MUR1520

4

FIGURE 1 — TYPICAL FORWARD VOLTAGE

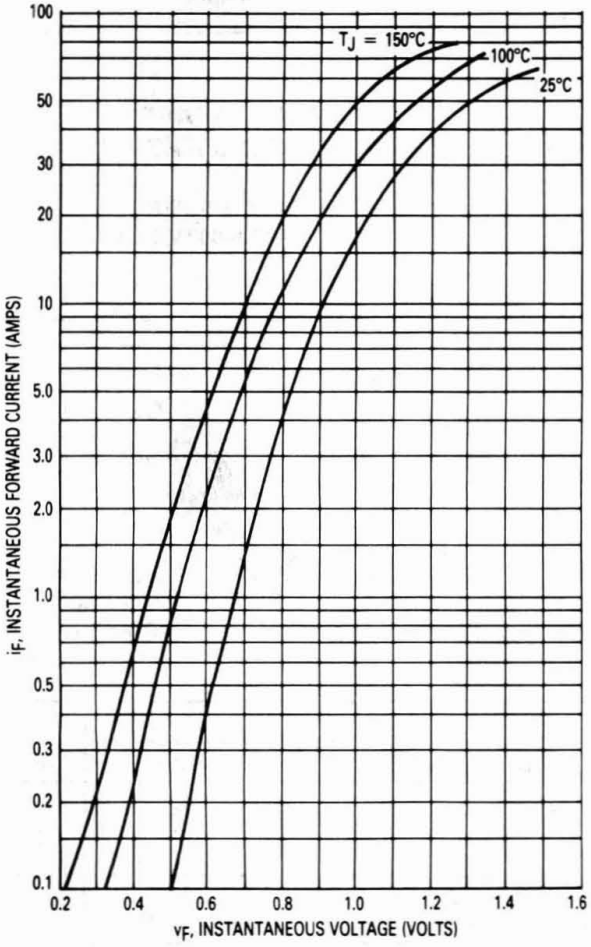

FIGURE 2 — TYPICAL REVERSE CURRENT

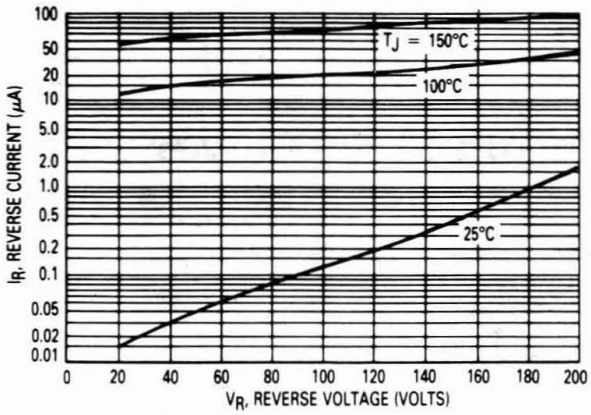

FIGURE 3 — CURRENT DERATING, CASE

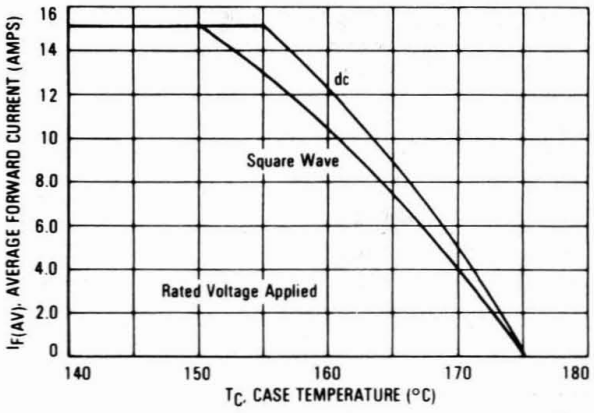

FIGURE 4 — CURRENT DERATING, AMBIENT

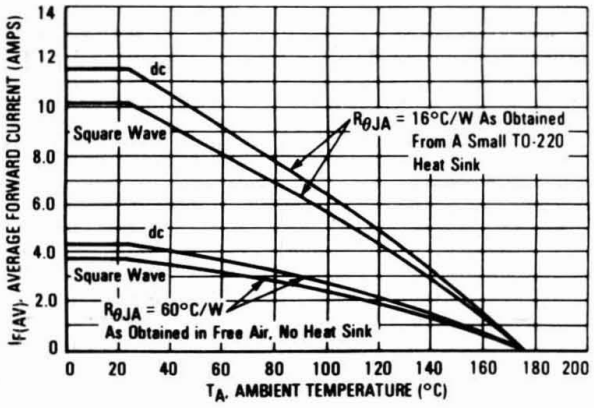

FIGURE 5 — POWER DISSIPATION

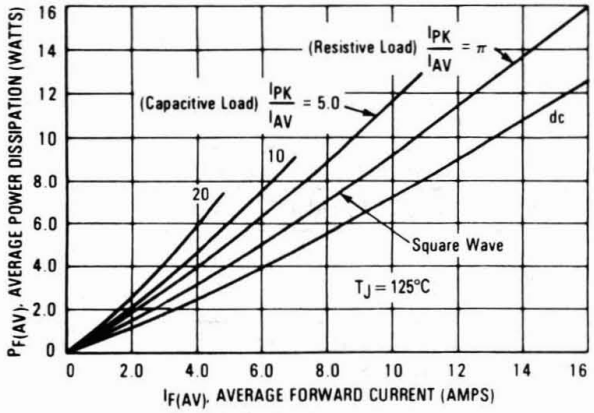

MUR1540

FIGURE 6 — TYPICAL FORWARD VOLTAGE

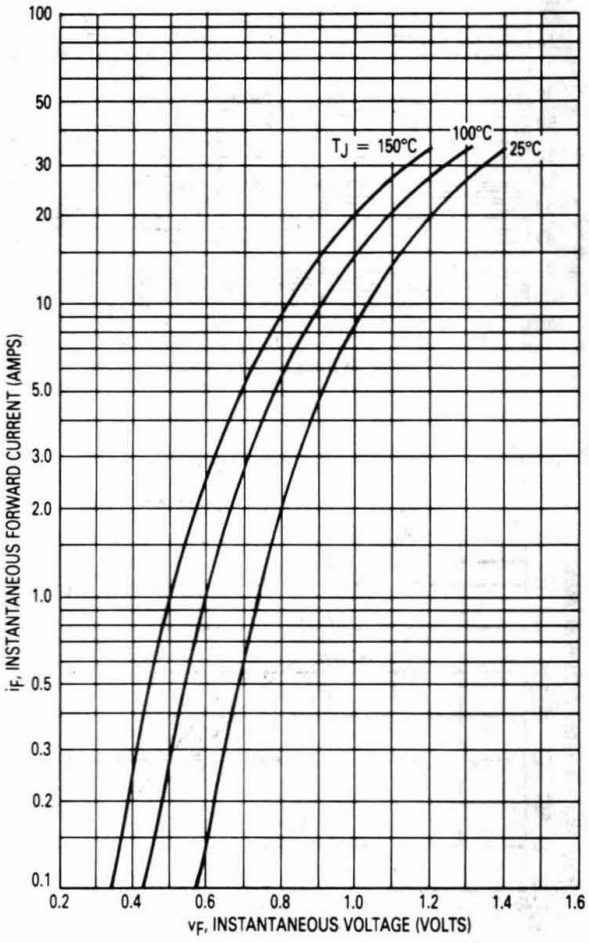

FIGURE 7 — TYPICAL REVERSE CURRENT

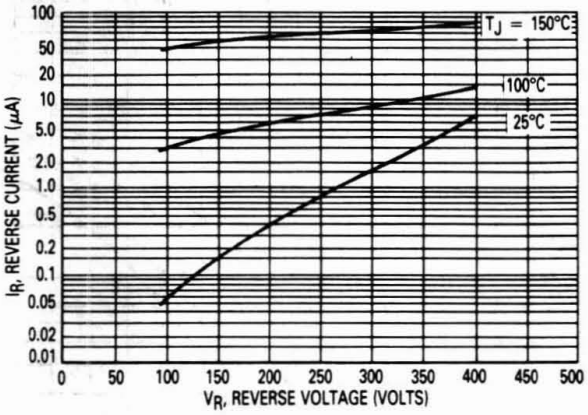

FIGURE 8 — CURRENT DERATING, CASE

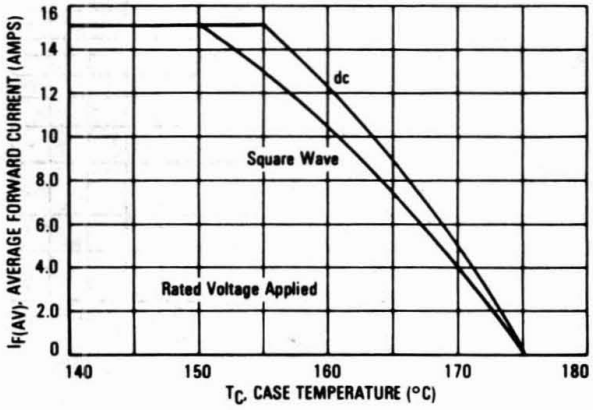

FIGURE 9 — CURRENT DERATING, AMBIENT

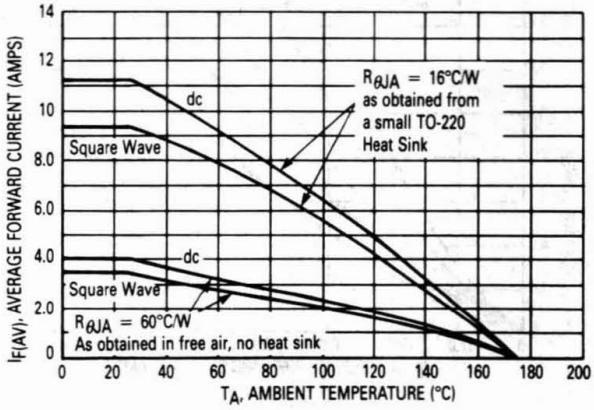

FIGURE 10 — POWER DISSIPATION

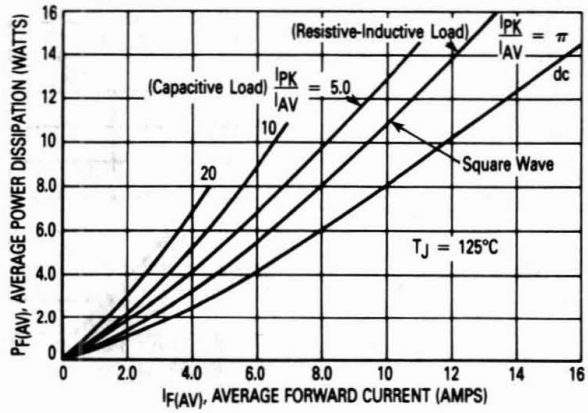

4

MUR1560

FIGURE 11 — TYPICAL FORWARD VOLTAGE

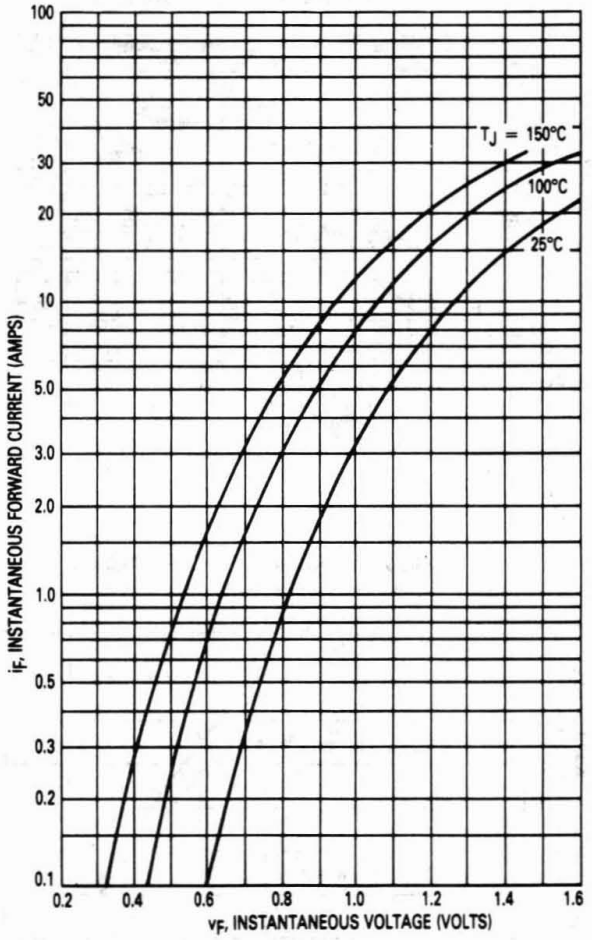

FIGURE 12 — TYPICAL REVERSE CURRENT

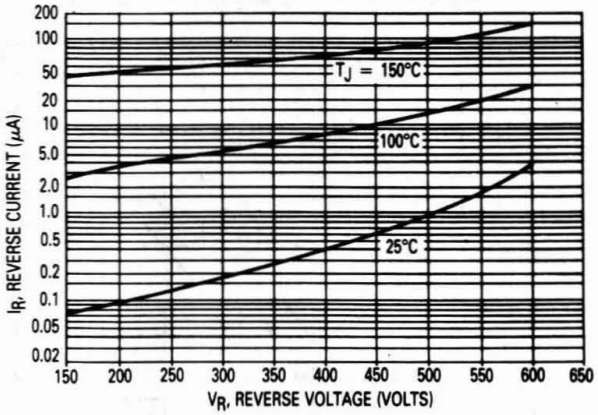

FIGURE 13 — CURRENT DERATING, CASE

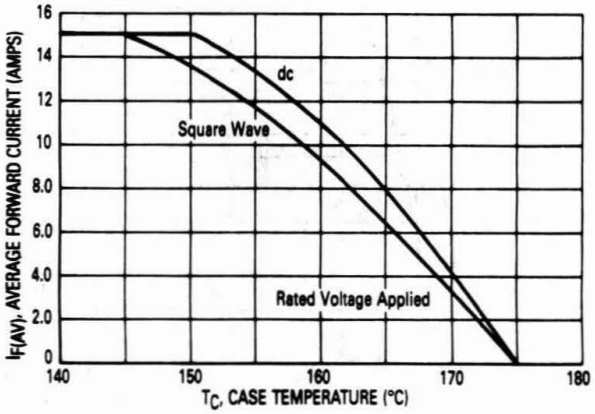

FIGURE 14 — CURRENT DERATING, AMBIENT

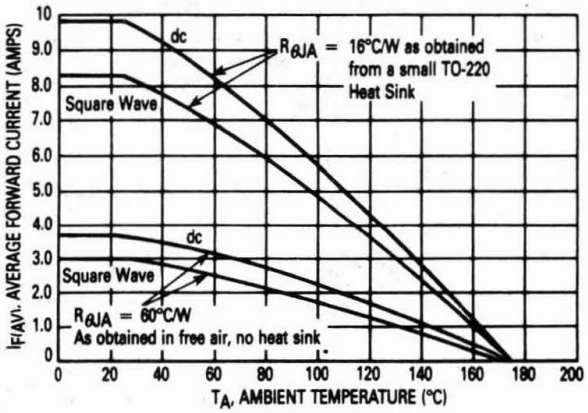

FIGURE 15 — POWER DISSIPATION

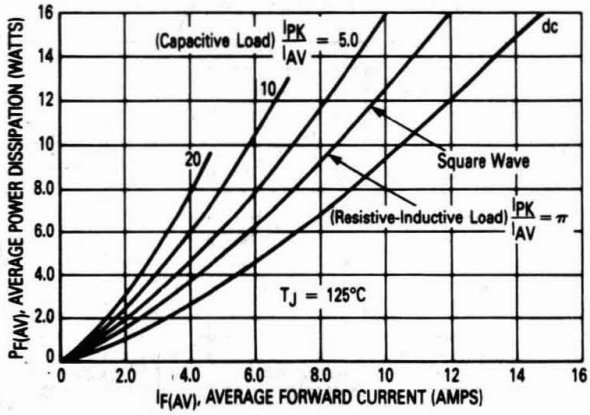

FIGURE 16 — THERMAL RESPONSE

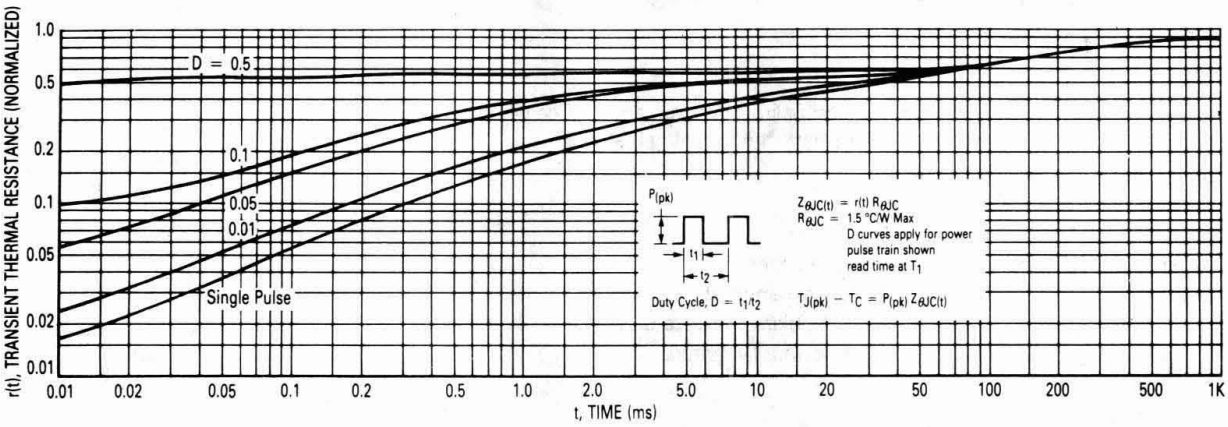

4

FIGURE 17 — TYPICAL CAPACITANCE

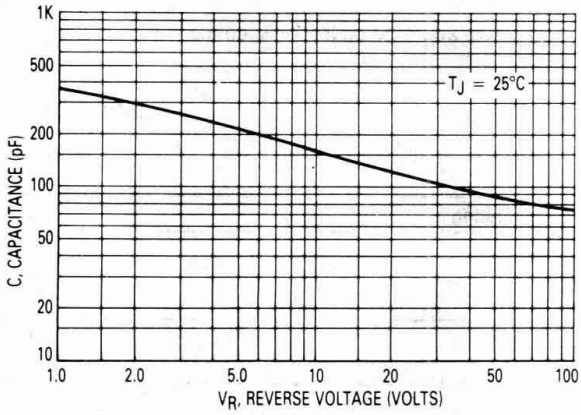

Advance Information

SWITCHMODE™ Power Rectifiers

MURF820

Motorola Preferred Device

ULTRAFAST RECTIFIERS
8 AMPERES
200 VOLTS



CASE 221E–01
ISOLATED TO–220

Designed for use in switching power supplies, inverters and as free wheeling diodes, these state–of–the–art devices have the following features:

- Ultrafast 35 ns Recovery Times
- 150°C Operating Junction Temperature
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating @ Both Case and Ambient Temperatures
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U820

4

MAXIMUM RATINGS

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Current (Rated V_R), T_C = 150°C		$I_{F(AV)}$	8	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 150°C		I_{FM}	16	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	100	Amps
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
RMS Isolation Voltage (t = 1 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 3 Per Figure 4(1) Per Figure 5	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.2	°C/W
Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 seconds	T_L	260	°C

(1) UL Recognized mounting method is per Figure 4.
(2) Proper strike and creepage distance must be provided.

This document contains information on a new product. Specifications and information are subject to change without notice.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (3) (i_F = 8.0 Amp, T_C = 150°C) (i_F = 8.0 Amp, T_C = 25°C)	v_F	 0.895 0.975	Volts
Maximum Instantaneous Reverse Current (3) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	 250 5.0	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 35 25	ns

(3) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.

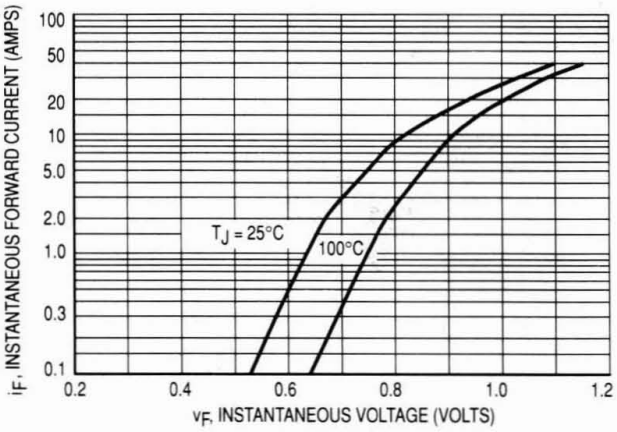

Figure 1. Typical Forward Voltage

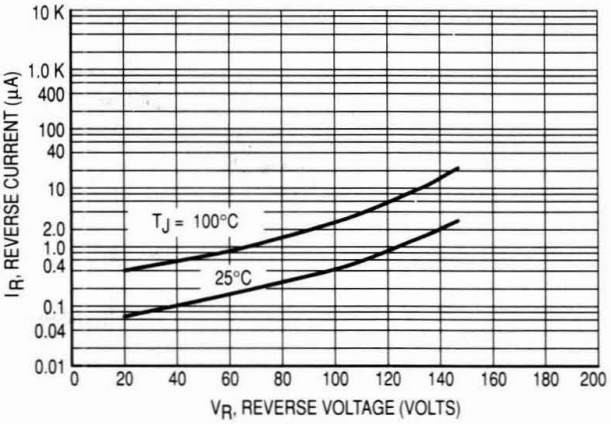

Figure 2. Typical Reverse Leakage Current*

TEST CONDITIONS FOR ISOLATION TESTS*

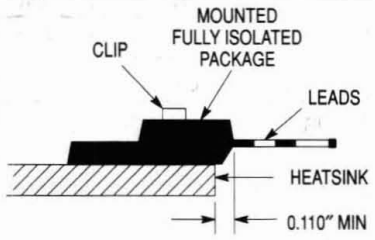

Figure 3. Clip Mounting Position for Isolation Test Number 1

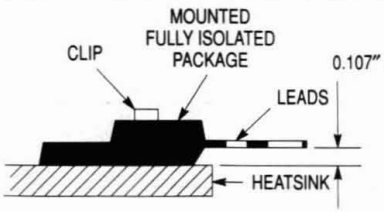

Figure 4. Clip Mounting Position for Isolation Test Number 2

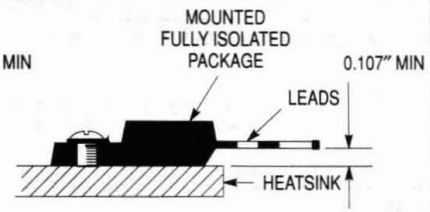

Figure 5. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

MOUNTING INFORMATION**

4

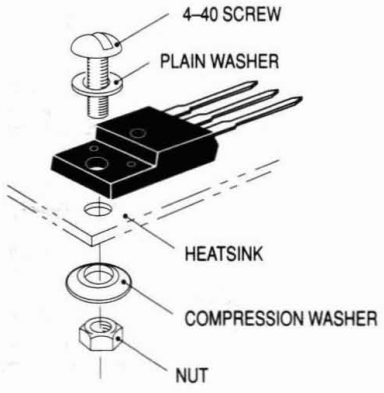

6a. Screw–Mounted

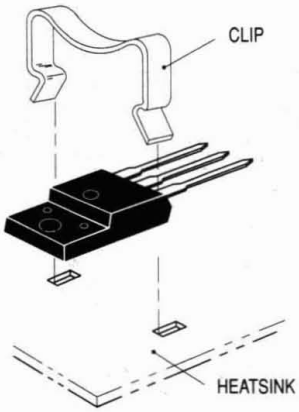

6b. Clip–Mounted

Figure 6. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

Advance Information

SWITCHMODE™ Power Rectifiers

MURF1620CT

Motorola Preferred Device

ULTRAFAST RECTIFIERS
16 AMPERES
and 200 VOLTS

Designed for use in switching power supplies, inverters and as free wheeling diodes, these state–of–the–art devices have the following features:

- Ultrafast 35 Nanosecond Recovery Times
- 150°C Operating Junction Temperature
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating @ Both Case and Ambient Temperatures
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)





CASE 221D–02
ISOLATED TO–220

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U1620

MAXIMUM RATINGS, PER LEG

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	200	Volts
Average Rectified Forward Current Total Device, (Rated V_R), T_C = 150°C	Total Device	$I_{F(AV)}$	8 16	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 150°C		I_{FM}	16	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	100	Amps
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
RMS Isolation Voltage (t = 1 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 3 Per Figure 4(1) Per Figure 5	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.2	°C/W
Lead Temperature for Soldering Purposes: 1/8″ from the Case for 5 seconds	T_L	260	°C

(1) UL Recognized mounting method is per Figure 4.
(2) Proper strike and creepage distance must be provided.

This document contains information on a new product. Specifications and information are subject to change without notice

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Rating	Symbol	Value	Unit
Maximum Instantaneous Forward Voltage (3) (i_F = 8.0 Amp, T_C = 150°C) (i_F = 8.0 Amp, T_C = 25°C)	v_F	 0.895 0.975	Volts
Maximum Instantaneous Reverse Current (3) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	 250 5.0	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 35 25	ns

(3) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

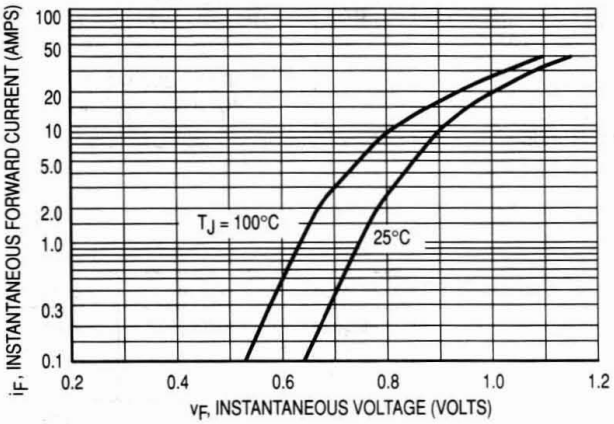

Figure 1. Typical Forward Voltage, Per Leg

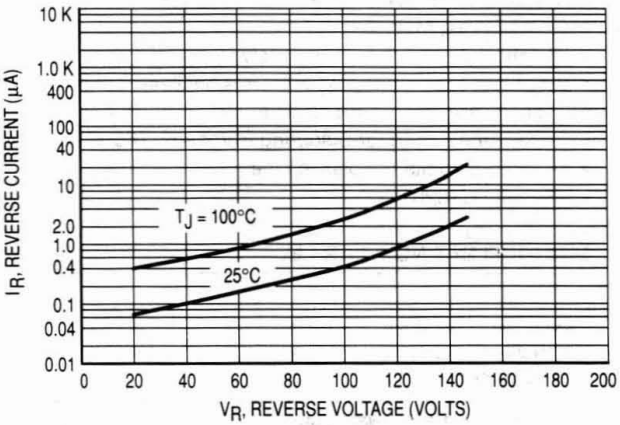

Figure 2. Typical Reverse Current, Per Leg*

TEST CONDITIONS FOR ISOLATION TESTS*

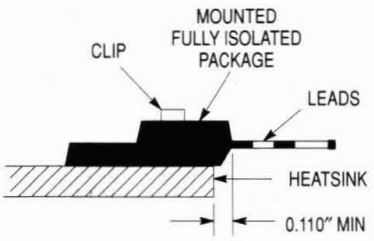

Figure 3. Clip Mounting Position for Isolation Test Number 1

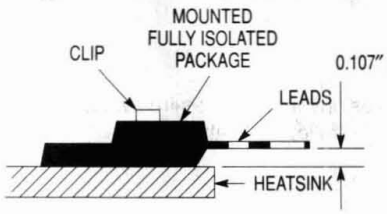

Figure 4. Clip Mounting Position for Isolation Test Number 2

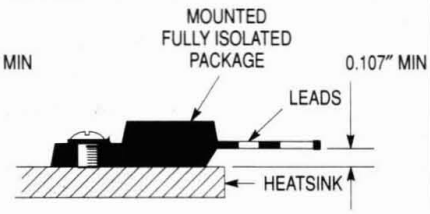

Figure 5. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

MOUNTING INFORMATION**

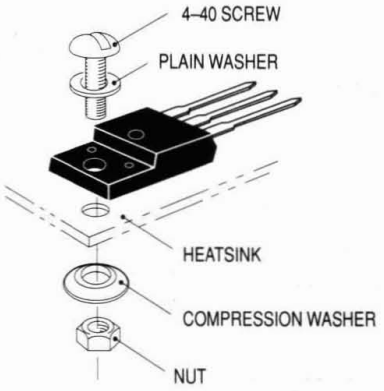

6a. Screw–Mounted

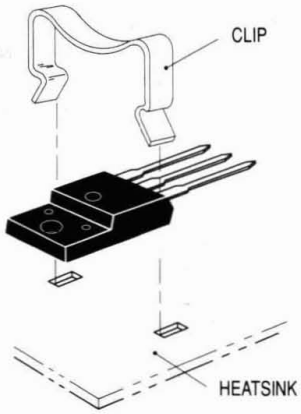

6b. Clip–Mounted

Figure 6. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

4

Advance Information

SWITCHMODE™ Power Rectifiers

MURF1660CT

Motorola Preferred Device

ULTRAFAST RECTIFIERS
16 AMPERES
600 VOLTS

Designed for use in switching power supplies, inverters and as free wheeling diodes, these state–of–the–art devices have the following features:

- Ultrafast 60 Nanosecond Recovery Times
- 150°C Operating Junction Temperature
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating @ Both Case and Ambient Temperatures
- Electrically Isolated. No Isolation Hardware Required.
- UL Recognized File #E69369(1)





CASE 221D–02
ISOLATED TO–220

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube
- Marking: U1660

4

MAXIMUM RATINGS, PER LEG

Rating		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	600	Volts
Average Rectified Forward Current Total Device, (Rated V_R), T_C = 150°C	Per Diode Per Device	$I_{F(AV)}$	8 16	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz), T_C = 150°C		I_{FM}	16	Amps
Non–repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	100	Amps
Operating Junction and Storage Temperature		T_J, T_{stg}	– 65 to +150	°C
RMS Isolation Voltage (t = 1 second, R.H. ≤ 30%, T_A = 25°C)(2)	Per Figure 3 Per Figure 4(1) Per Figure 5	V_{iso1} V_{iso2} V_{iso3}	4500 3500 1500	Volts

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	3.0	°C/W
Lead Temperature for Soldering Purposes: 1/8″ from Case for 5 Seconds	T_L	260	°C

(1) UL Recognized mounting method is per Figure 4.
(2) Proper Strike and creepage distance must be provided.

This document contains information on a new product. Specifications and information herein are subject to change without notice.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

ELECTRICAL CHARACTERISTICS, PER LEG

Rating	Symbol	Value	Unit
Maximum Instantaneous Forward Voltage (3) (i_F = 8.0 Amp, T_C = 150°C) (i_F = 8.0 Amp, T_C = 25°C)	v_F	 1.20 1.50	Volts
Maximum Instantaneous Reverse Current (3) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	 500 10	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amp, di/dt = 50 Amp/μs) (I_F = 0.5 Amp, i_R = 1.0 Amp, I_{REC} = 0.25 Amp)	t_{rr}	 60 50	ns

(3) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

4

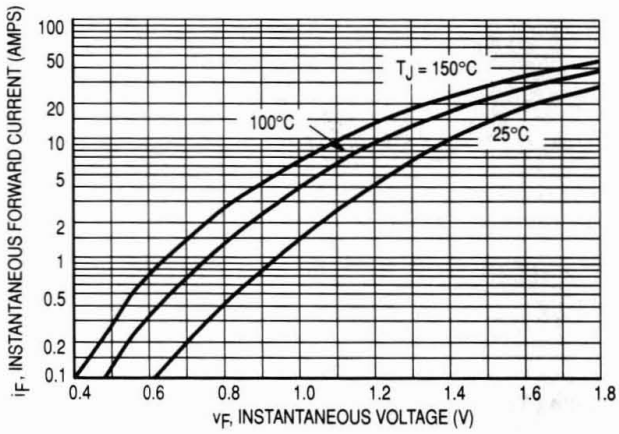

Figure 1. Typical Forward Voltage, Per Leg

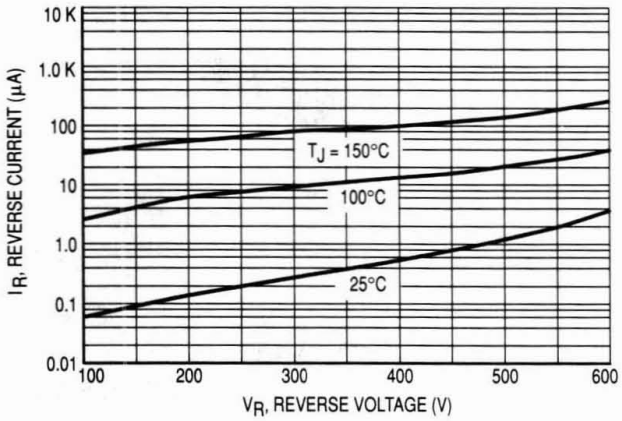

Figure 2. Typical Reverse Current, Per Leg*

TEST CONDITIONS FOR ISOLATION TESTS*

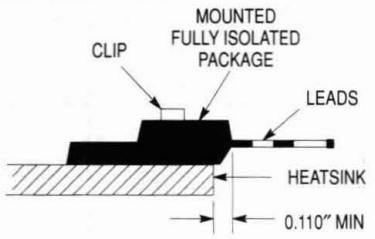

Figure 3. Clip Mounting Position for Isolation Test Number 1

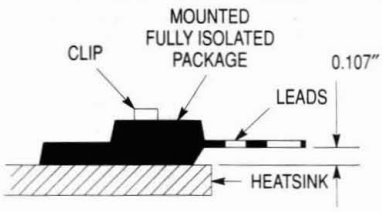

Figure 4. Clip Mounting Position for Isolation Test Number 2

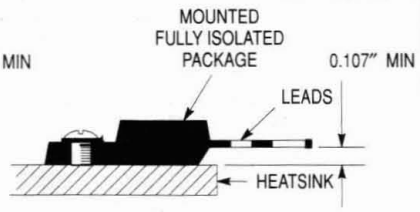

Figure 5. Screw Mounting Position for Isolation Test Number 3

* Measurement made between leads and heatsink with all leads shorted together.

MOUNTING INFORMATION**

4

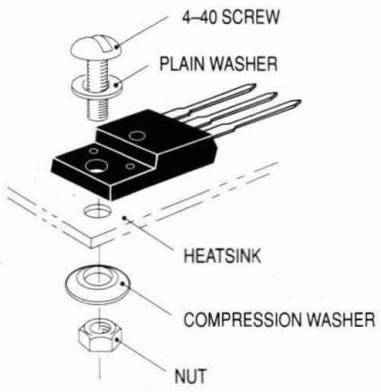

6a. Screw–Mounted

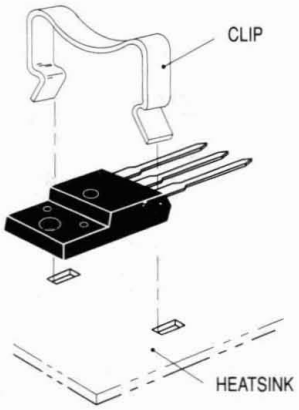

6b. Clip–Mounted

Figure 6. Typical Mounting Techniques

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.

Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, Motorola does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

**For more information about mounting power semiconductors see Application Note AN1040.

Switchmode Power Rectifiers

MUR3020WT
MUR3040WT
MUR3060WT
Motorola preferred devices

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state–of–the–art devices have the following features:

- Ultrafast 35 and 60 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Popular TO–247 Package
- High Voltage Capability to 600 Volts
- Low Forward Drop
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating Specified @ Both Case and Ambient Temperatures
- Epoxy Meets UL94V–O @ 1/8″
- High Temperature Glass Passivated Junction

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: U3020, U3040, U3060

ULTRAFAST RECTIFIERS
30 AMPERES
200–400–600 VOLTS





CASE 340F–03
TO–247AE
STYLE 2

4

MAXIMUM RATINGS, PER LEG

Rating	Symbol	MUR3020WT	MUR3040WT	MUR3060WT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	400	600	Volts
Average Rectified Forward Current @ 145°C Total Device	$I_{F(AV)}$	15 30			Amps
Peak Repetitive Surge Current (Rated V_R, Square Wave, 20 kHz, T_C = 145°C)	I_{FM}	30			Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	I_{FSM}	200	150		
Operating Junction and Storage Temperature	T_J, T_{stg}	– 65 to +175			°C

THERMAL CHARACTERISTICS, PER LEG

Maximum Thermal Resistance — Junction to Case — Junction to Ambient	$R_{\theta JC}$ $R_{\theta JA}$	1.5 40	°C/W

ELECTRICAL CHARACTERISTICS, PER LEG

Maximum Instantaneous Forward Voltage (1) (I_F = 15 Amp, T_C = 150°C) (I_F = 15 Amp, T_C = 25°C)	V_F	0.85 1.05	1.12 1.25	1.4 1.7	Volts
Maximum Instantaneous Reverse Current (1) (Rated DC Voltage, T_J = 150°C) (Rated DC Voltage, T_J = 25°C)	i_R	500 10		1000 10	μA
Maximum Reverse Recovery Time (i_F = 1.0 A, di/dt = 50 Amps/μs)	t_{rr}	35	60		ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

MUR3020WT

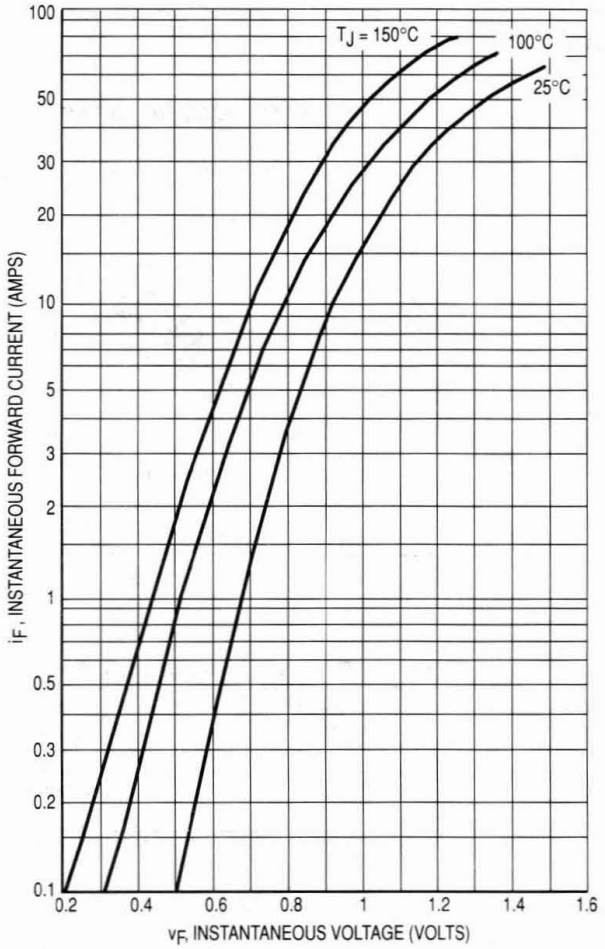

Figure 1. Typical Forward Voltage (Per Leg)

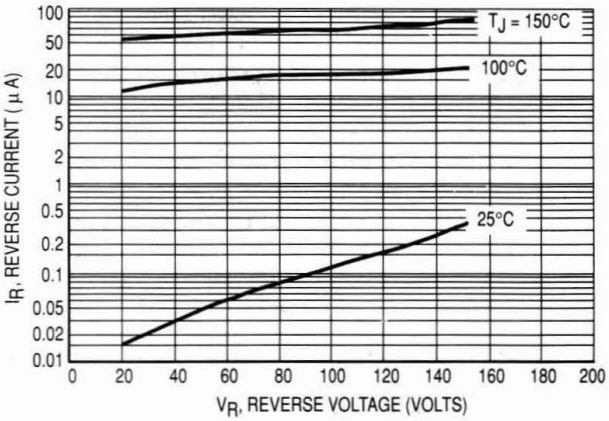

Figure 2. Typical Reverse Current (Per Leg)

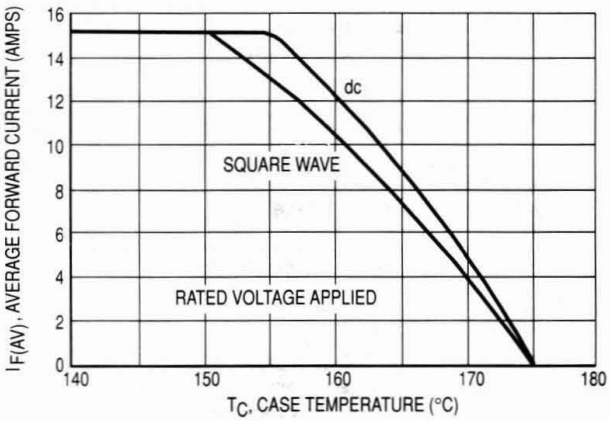

Figure 3. Current Derating, Case (Per Leg)

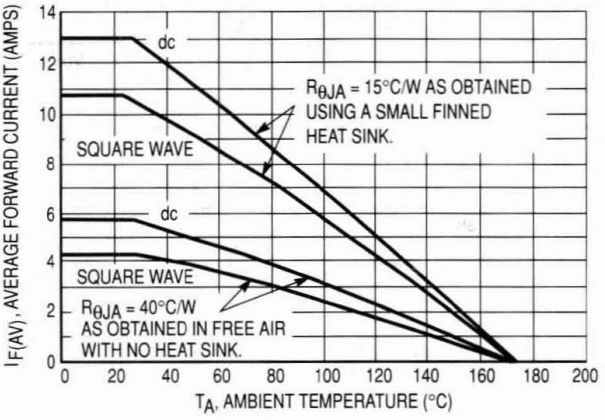

Figure 4. Current Derating, Ambient (Per Leg)

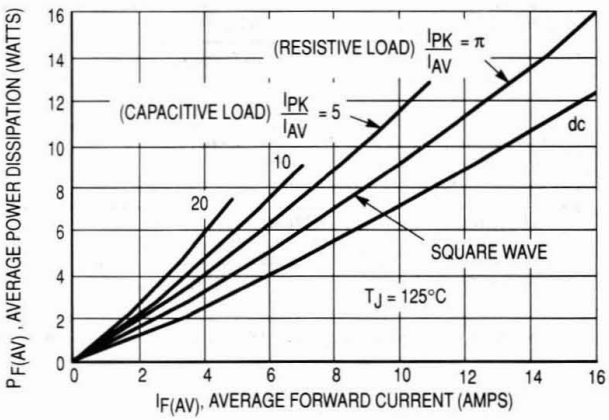

Figure 5. Power Dissipation (Per Leg)

MUR3040WT

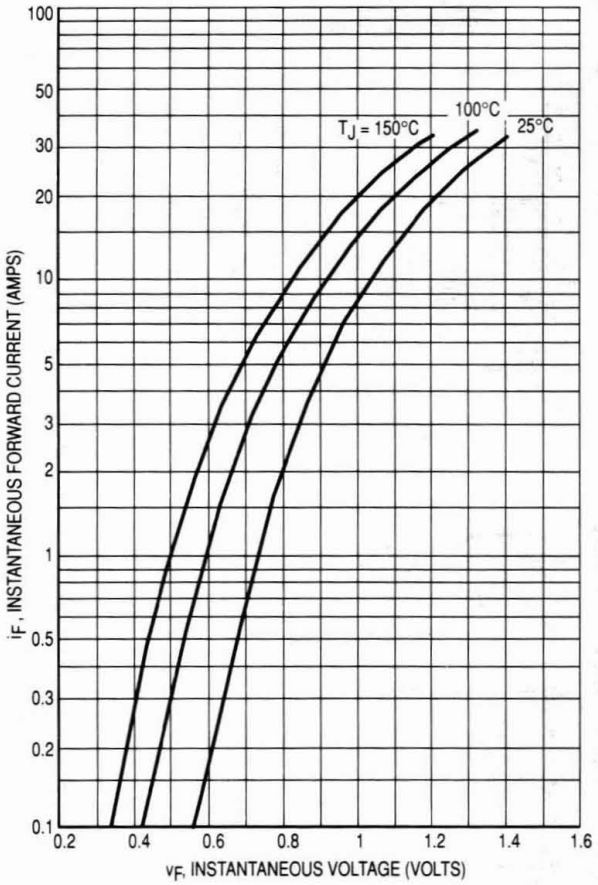

Figure 6. Typical Forward Voltage (Per Leg)

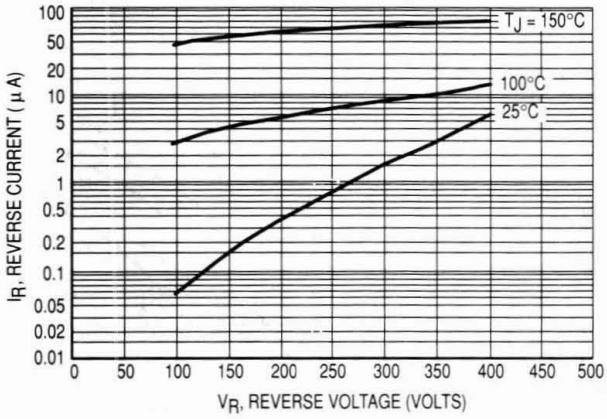

Figure 7. Typical Reverse Current (Per Leg)

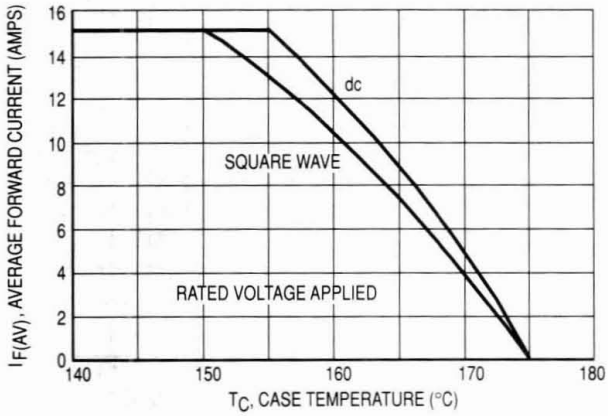

Figure 8. Current Derating, Case (Per Leg)

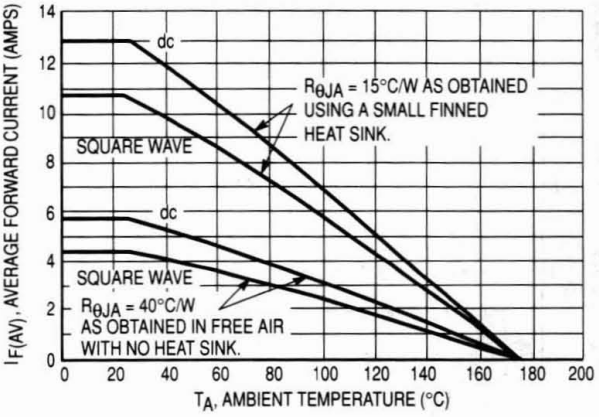

Figure 9. Current Derating, Ambient (Per Leg)

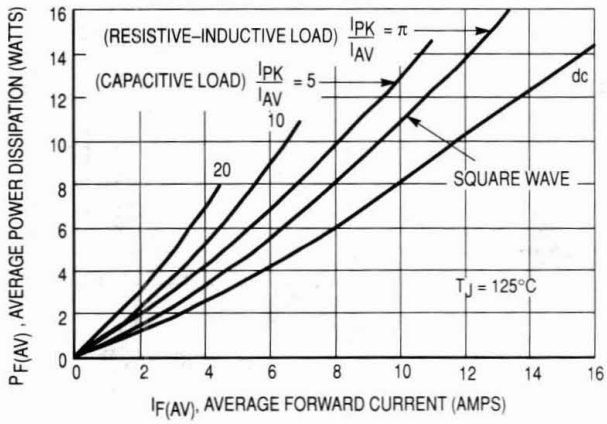

Figure 10. Power Dissipation (Per Leg)

MUR3060WT

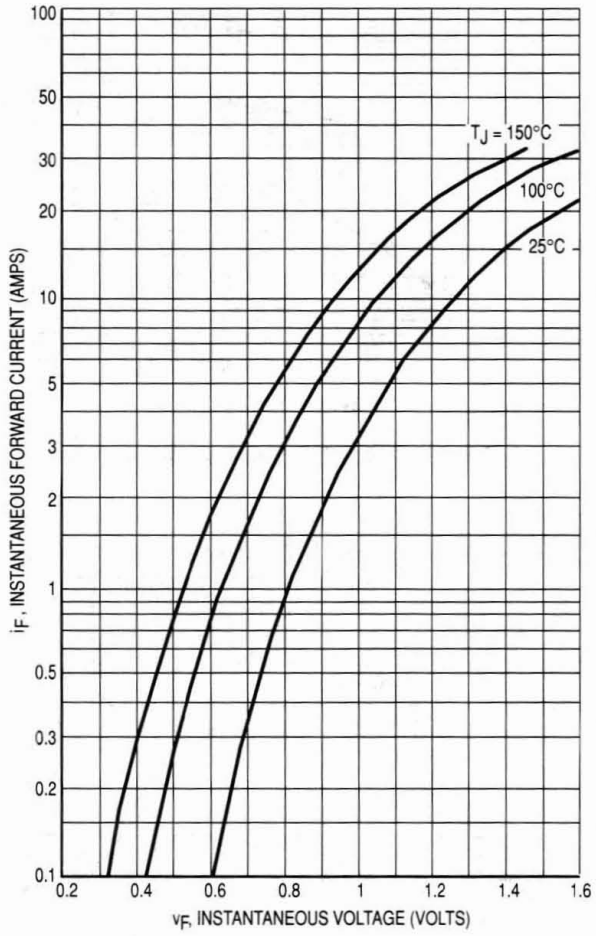

Figure 11. Typical Forward Voltage (Per Leg)

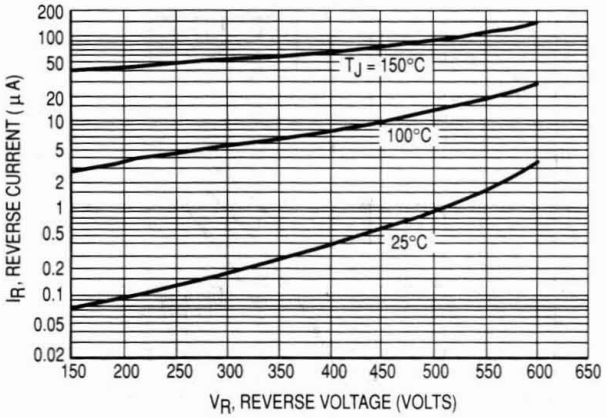

Figure 12. Typical Reverse Current (Per Leg)

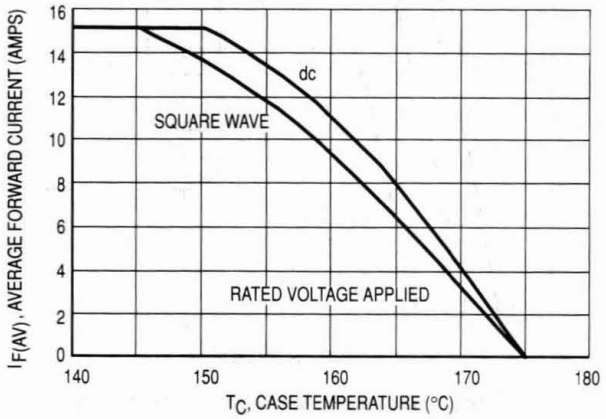

Figure 13. Current Derating, Case (Per Leg)

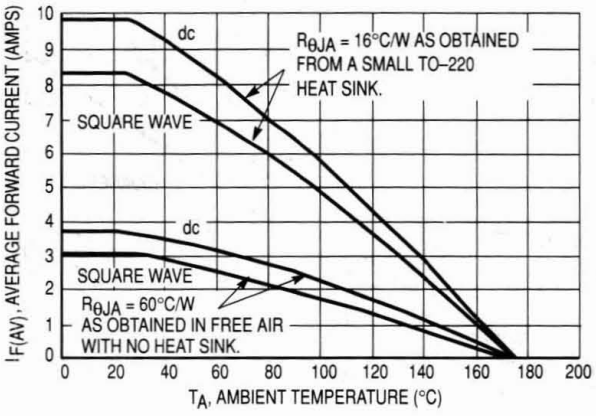

Figure 14. Current Derating, Ambient (Per Leg)

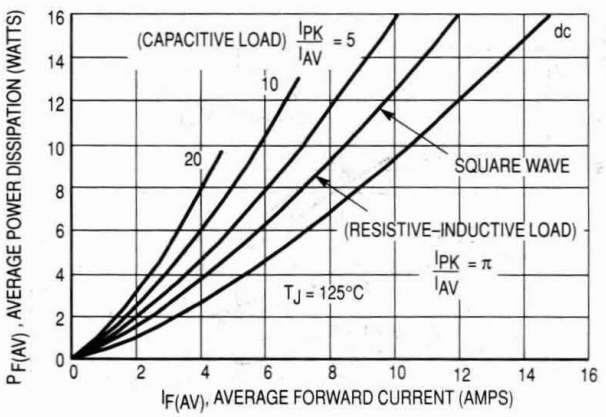

Figure 15. Power Dissipation (Per Leg)

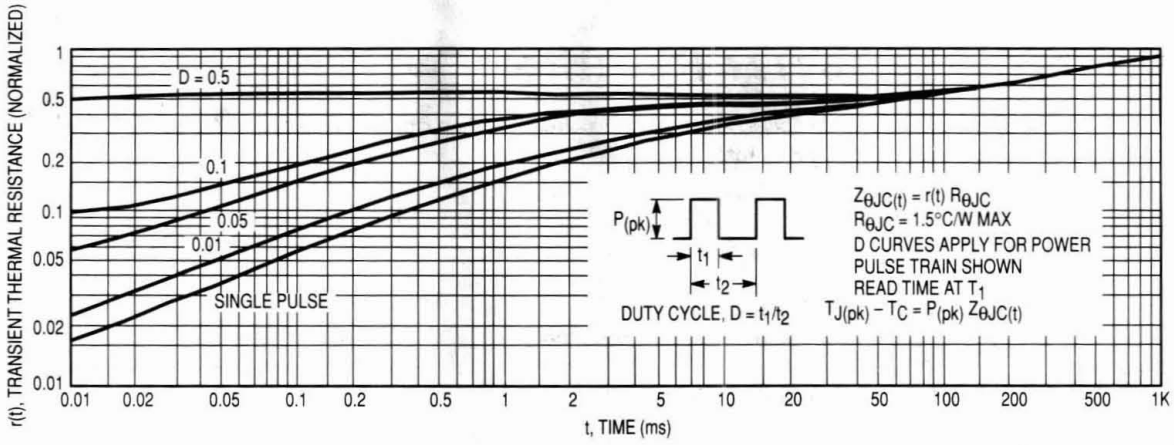

Figure 16. Thermal Response

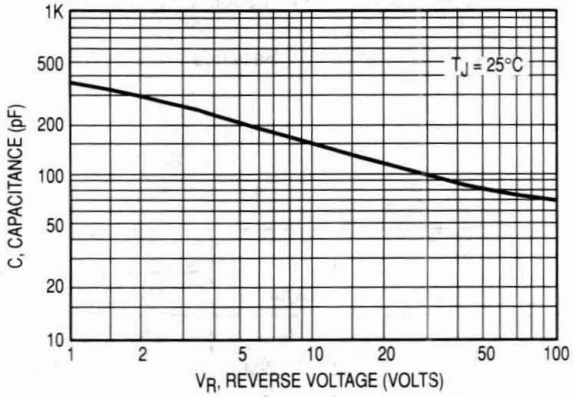

Figure 17. Typical Capacitance (Per Leg)

MUR3020PT
MUR3040PT
MUR3060PT

MUR3020PT and MUR3060PT are Motorola Preferred Devices

ULTRAFAST RECTIFIERS
30 AMPERES
200–400–600 VOLTS

Switchmode Power Rectifiers

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 and 60 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- High Voltage Capability to 600 Volts
- Low Forward Drop
- Low Leakage Specified @ 150°C Case Temperature
- Current Derating Specified @ Both Case and Ambient Temperatures
- Epoxy Meets UL94, V_O @ 1/8″
- High Temperature Glass Passivated Junction



Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: U3020, U3040, U3060

CASE 340D-01
(TO-218AC)
STYLE 2

4

MAXIMUM RATINGS

Rating	Symbol	MUR 3020PT	MUR 3040PT	MUR 3060PT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	400	600	Volts
Average Rectified Forward Current (Rated V_R) Per Leg Per Device	$I_{F(AV)}$	15 30 T_C = 150°C		15 T_C = 30 145°C	Amps
Peak Rectified Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz), T_C = 150°C	I_{FRM}	30 @ T_C = 150°C		30 @ T_C = 145°C	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz) Per Leg	I_{FSM}	200	150		Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175			°C

THERMAL CHARACTERISTICS PER DIODE LEG

Maximum Thermal Resistance, Junction to Case Junction to Ambient	$R_{\theta JC}$ $R_{\theta JA}$	1.5 40	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE LEG

Maximum Instantaneous Forward Voltage (1) (i_F = 15 Amps, T_C = 150°C) (i_F = 15 Amps, T_C = 25°C)	v_F	0.85 1.05	1.12 1.25	1.2 1.5	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 150°C) (Rated dc Voltage, T_C = 25°C)	i_R	500 10		1000 10	μA
Maximum Reverse Recovery Time (I_F = 1 Amp, di/dt = 50 Amps/μs)	t_{rr}	35	60		ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2%

Rev 3

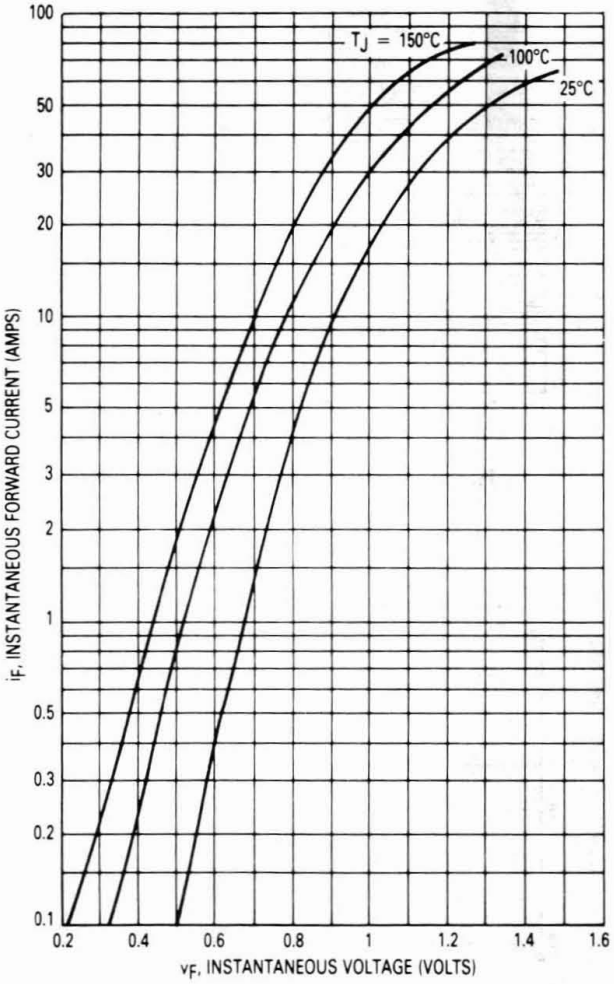

Figure 1. Typical Forward Voltage (Per Leg)

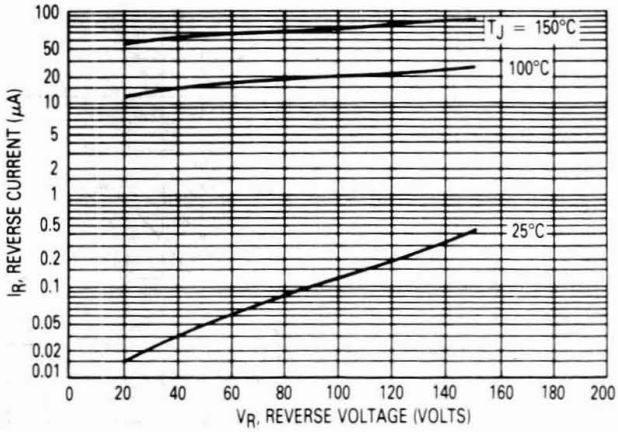

Figure 2. Typical Reverse Current (Per Leg)

4

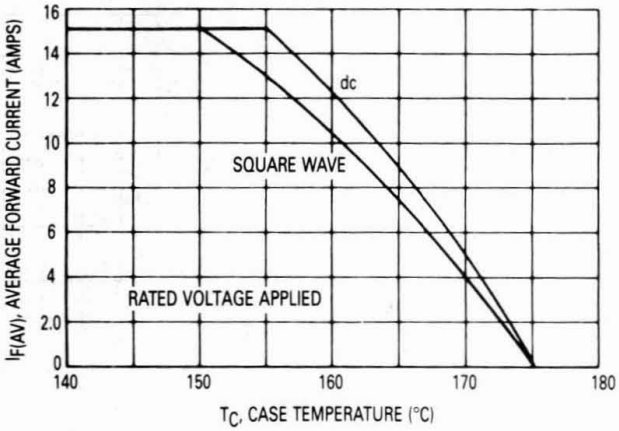

Figure 3. Current Derating, Case (Per Leg)

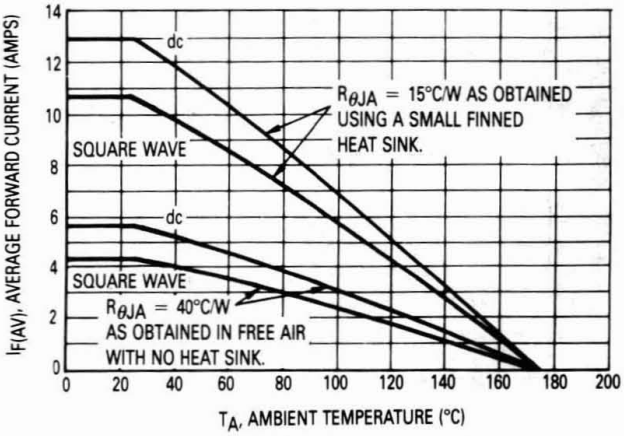

Figure 4. Current Derating, Ambient (Per Leg)

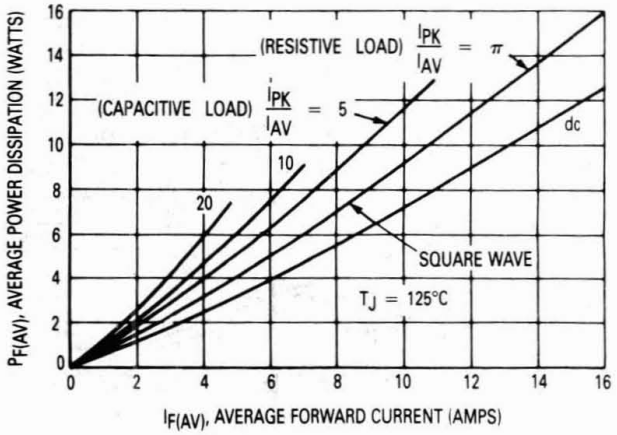

Figure 5. Power Dissipation (Per Leg)

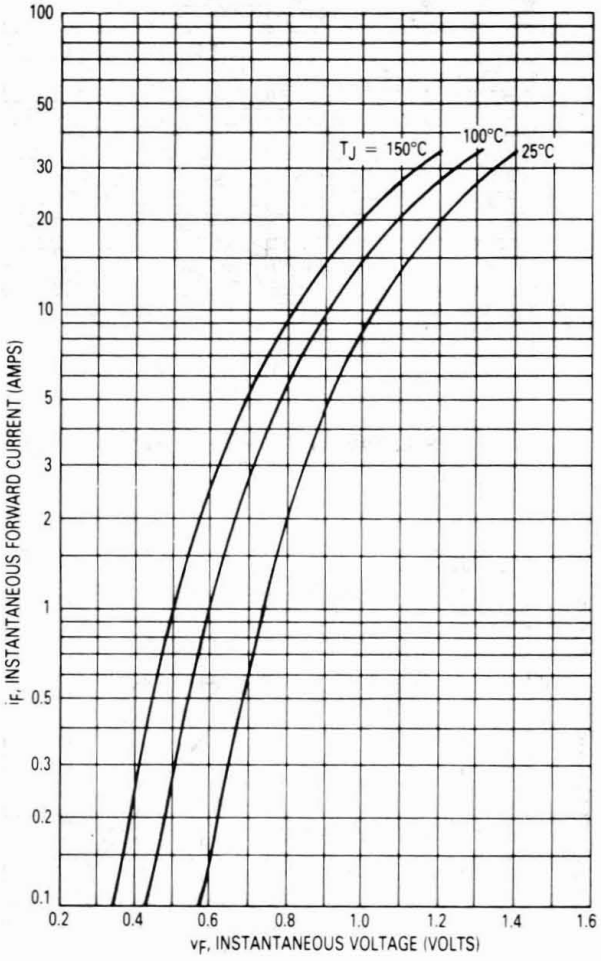

Figure 6. Typical Forward Voltage (Per Leg)

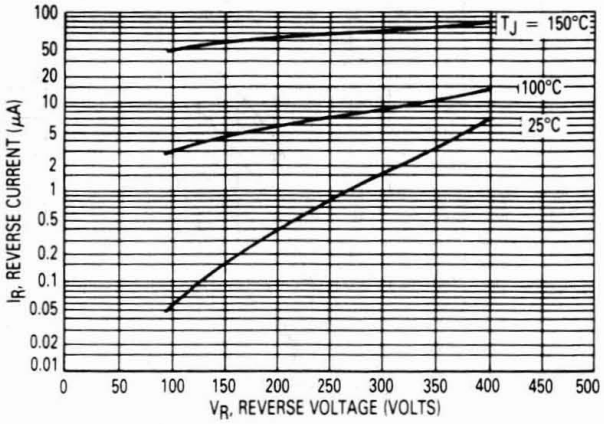

Figure 7. Typical Reverse Current (Per Leg)

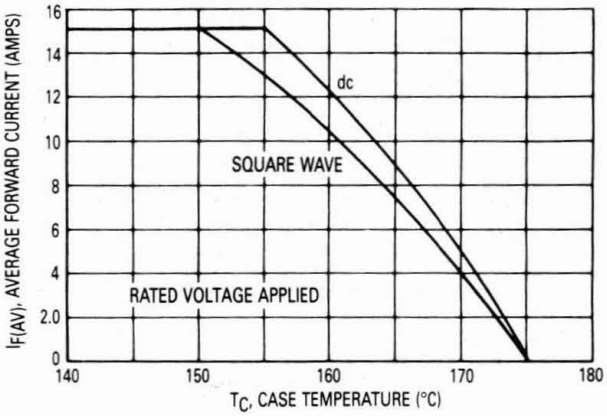

Figure 8. Current Derating, Case (Per Leg)

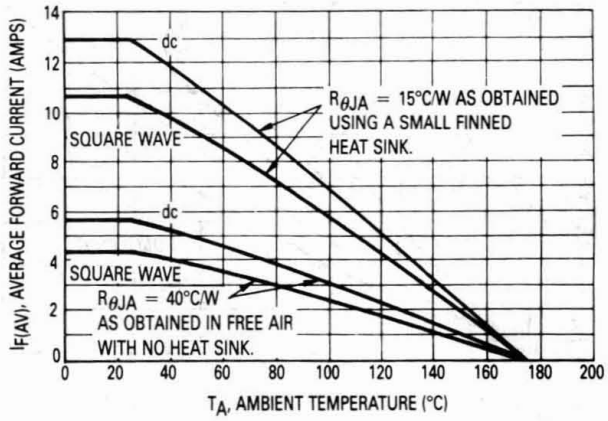

Figure 9. Current Derating, Ambient (Per Leg)

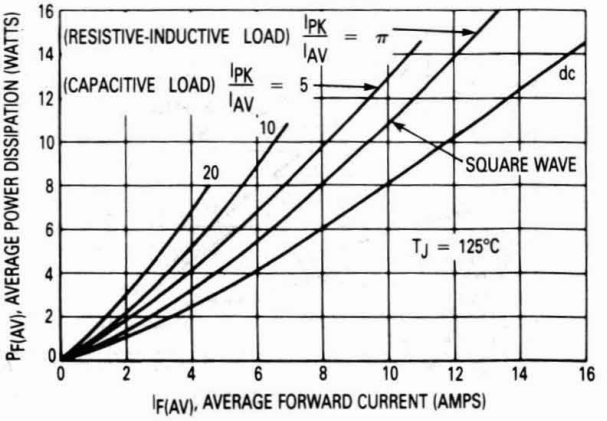

Figure 10. Power Dissipation (Per Leg)

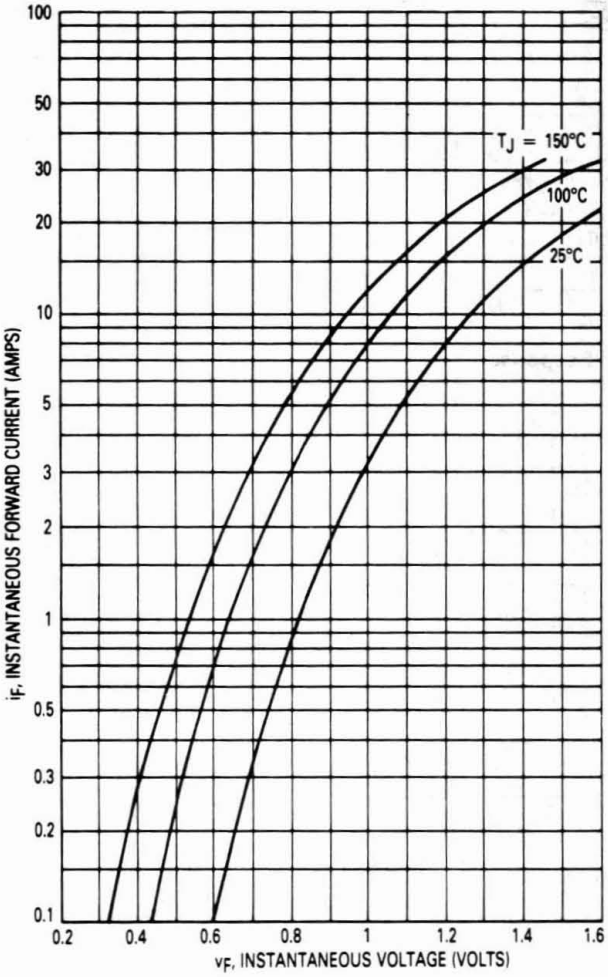

Figure 11. Typical Forward Voltage

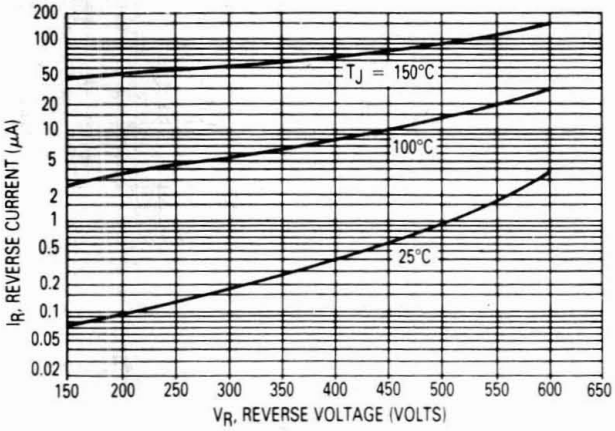

Figure 12. Typical Reverse Current

4

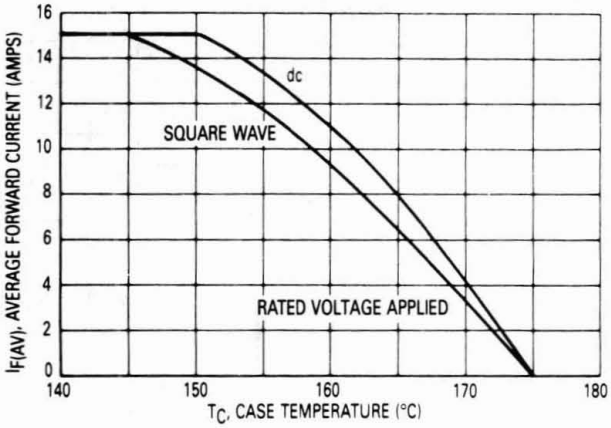

Figure 13. Current Derating, Case

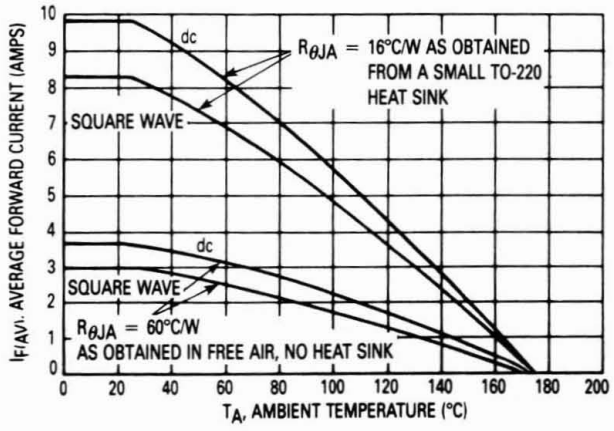

Figure 14. Current Derating, Ambient

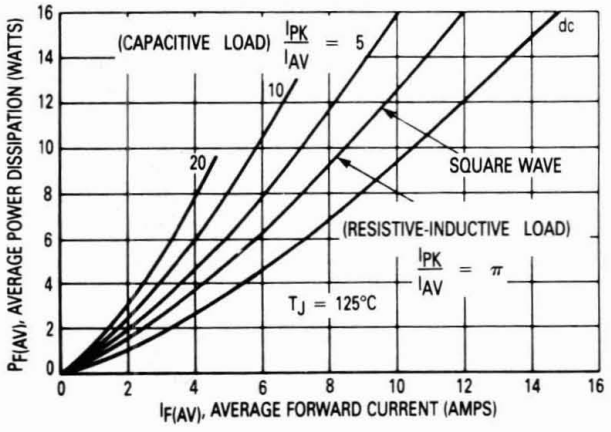

Figure 15. Power Dissipation

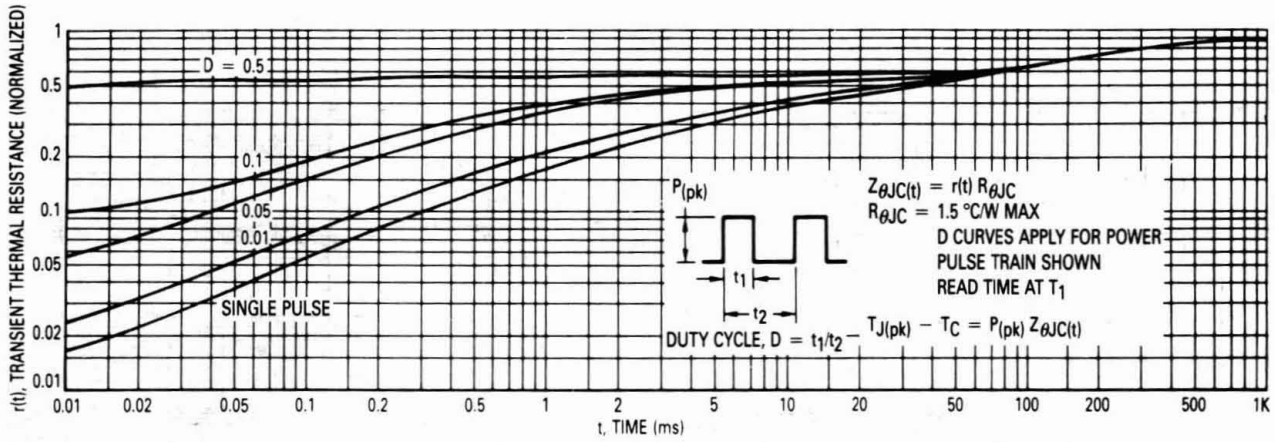

Figure 16. Thermal Response

4

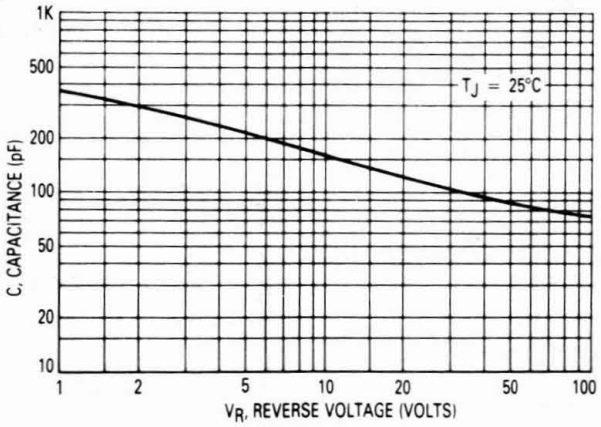

Figure 17. Typical Capacitance (Per Leg)

MUR3040

Motorola Preferred Device

SWITCHMODE
Power Rectifiers

ULTRAFAST RECTIFIERS
30 AMPERES
400 VOLTS

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 100 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- High Voltage Capability to 400 Volts
- Low Forward Voltage Drop
- High Temperature Glass Passivated Junction

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: U3040



CASE 340E-01
STYLE 1

4

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	 400	Volts
Average Rectified Forward Current T_C = 70°C	$I_{F(AV)}$	30	Amps
Peak Repetitive Forward Current (Rated V_R Square Wave 20 kHz) T_C = 150°C	I_{FRM}	30	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	300	Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W

ELECTRICAL CHARACTERISTICS

Instantaneous Forward Voltage (I_F = 30 Amp, T_C = 100°C) (I_F = 30 Amp, T_C = 25°C)	v_F	 1.4 1.5	Volts
Instantaneous Reverse Current (Rated dc Voltage, T_C = 100°C) (Rated dc Voltage, T_C = 25°C)	i_R	 6.0 35	 mA μA
Reverse Recovery Time (I_F = 1.0 Amp dI/dt = 15 Amp/μs	t_{rr}	100	ns

Rev 2

TYPICAL ELECTRICAL CHARACTERISTICS

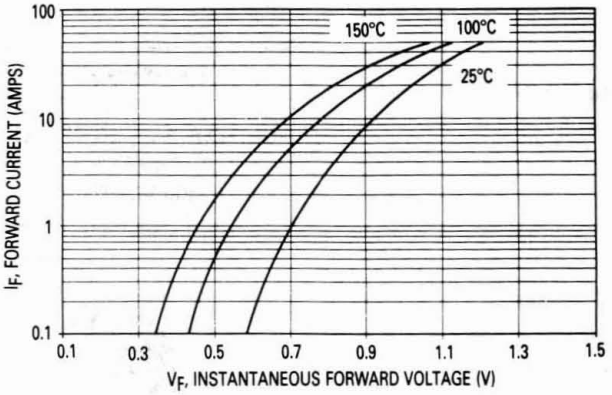

Figure 1. Typical Forward Voltage

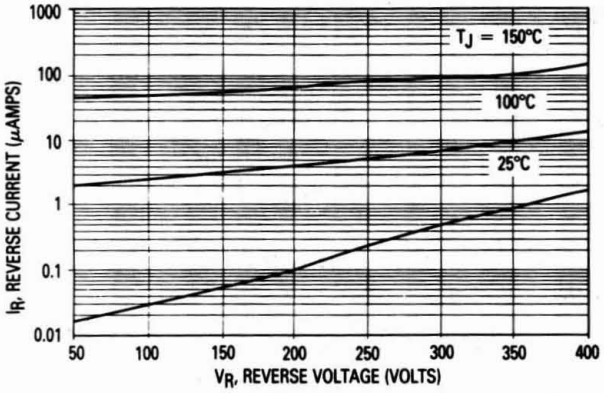

Figure 2. Typical Reverse Current

4

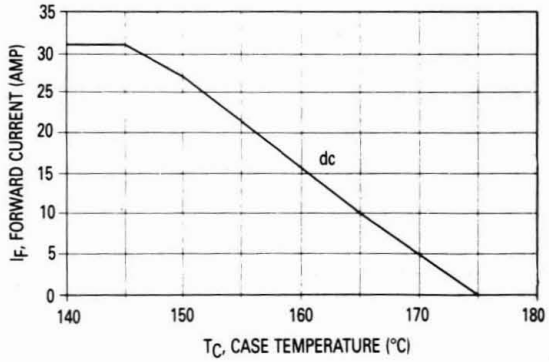

Figure 3. Current Derating, Case

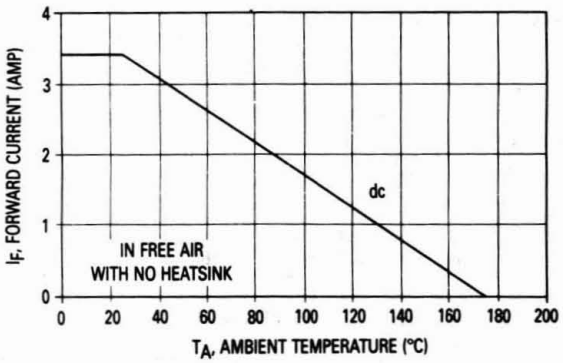

Figure 4. Current Derating, Ambient

Advance Information

SWITCHMODE™ Power Rectifier

MUR3080

Motorola Preferred Device

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state–of–the–art devices have the following features:

- Ultrafast 75 ns (Typ) Soft Recovery Time
- 175°C Operating Junction Temperature
- High Voltage Capability to 800 Volts
- Low Forward Voltage Drop
- High Temperature Glass Passivated Junction

ULTRAFAST RECTIFIERS
30 AMPERES
600–800 VOLTS



CASE 340E–01, STYLE 1

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 Units Per Plastic Tube
- Marking: U3080



4

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	800	Volts
Average Rectified Forward Current (Rated V_R) T_C = 70°C	$I_{F(AV)}$	30	Amps
Peak Repetitive Forward Current (Rated V_R, Square Wave, 20 kHz) T_C = 150°C	I_{FRM}	30	Amps
Non Repetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	300	Amps
Operating Junction Temperature	T_J	–65 to +175	°C
Storage Temperature	T_{stg}	–65 to +175	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	$R_{\theta JC}$	1.0	°C/W

ELECTRICAL CHARACTERISTICS (TYPICAL DATA)

Instantaneous Forward Voltage (1) @ I_F = 30 Amps, T_C = 25°C @ I_F = 30 Amps, T_C = 100°C	V_F	 1.9 1.8	Volts
Instantaneous Reverse Current (1) @ Rated DC Voltage, T_C = 25°C @ Rated DC Voltage, T_C = 100°C	I_R	 100 5.0	 μA mA
Reverse Recovery Time I_F = 1.0 Amp, V_R = 30 V, dI/dt = 50 A/μs	t_{RR}	110	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

This document contains information on a new product. Specifications and information herein are subject to change without notice.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 1

SWITCHMODE
Power Rectifiers

MUR6040

Motorola Preferred Device

ULTRAFAST RECTIFIERS
60 AMPERES
400 VOLTS

CASE 340E-01
STYLE 1

. . . designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 100 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- High Voltage Capability to 400 Volts
- Low Forward Voltage Drop
- High Temperature Glass Passivated Junction

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 4.3 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 30 units per plastic tube
- Marking: U6040



4

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	 400	Volts
Average Rectified Forward Current T_C = 70°C	$I_{F(AV)}$	60	Amps
Peak Repetitive Forward Current (Rated V_R Square Wave 20 kHz) T_C = 150°C	I_{FRM}	60	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	600	Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	−65 to +175	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.8	°C/W

ELECTRICAL CHARACTERISTICS

Instantaneous Forward Voltage (I_F = 60 Amp, T_C = 100°C) (I_F = 60 Amp, T_C = 25°C)	V_F	 1.4 1.5	Volts
Instantaneous Reverse Current (Rated dc Voltage, T_C = 100°C) (Rated dc Voltage, T_C = 25°C)	I_R	 10 60	 mA μA
Reverse Recovery Time (I_F = 1.0 Amp dI/dt = 15 Amp/μs	t_{rr}	100	ns

Rev 2

TYPICAL ELECTRICAL CHARACTERISTICS

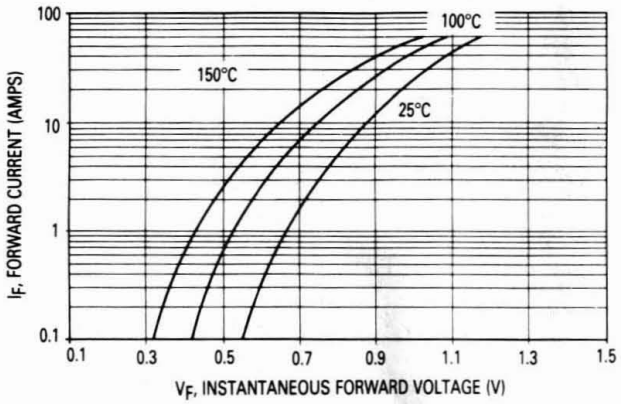

Figure 1. Typical Forward Voltage

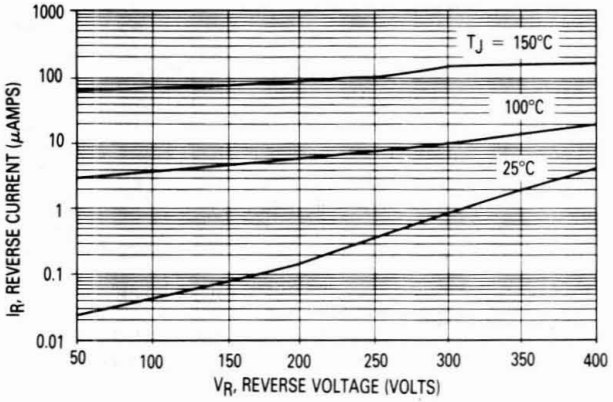

Figure 2. Typical Reverse Current

4

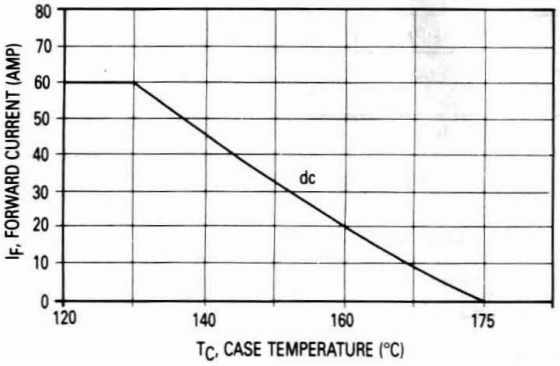

Figure 3. Current Derating, Case

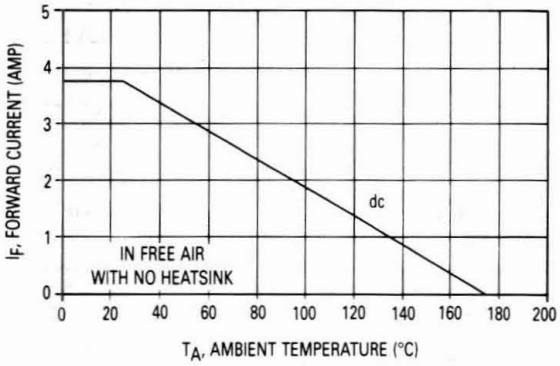

Figure 4. Current Derating, Ambient

Ultrafast Power Rectifiers

BYT230PIV-400M

ULTRAFAST RECTIFIERS 60 AMPS 400 VOLTS

Dual high voltage rectifiers ranging from 200 V to 400 V suited for Switch Mode Power Supplies and other power converters.

- Very Low Reverse Recovery Time
- Very Low Switching Losses
- Low Noise Turn–Off Switching
- Insulated Package:
  Insulating voltage = 2500 V_{RMS}
  Capacitance = 45 pF
- ℛ — UL Recognized, File #E69369



SOT–227B, STYLE 3

Mechanical Characteristics

- Case: Molded epoxy with isolated metal base
- Weight: 28 g (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Shipped 10 units per plastic tube
- Marking: BYT230PIV–400M

4

MAXIMUM RATINGS

Rating		Symbol	Max	Unit
Peak Repetitive Reverse Voltage		V_{RRM}	400	V
Average Rectified Current T_C = 75°C	Per Device Per Diode	$I_{F(AV)}$	60 30	A
Peak Repetitive Forward Current, Per Diode t_p < 10 µs		I_{FRM}	500	A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	350	A
Operating Junction Temperature		T_J	−40 to +150	°C
Storage Temperature		T_{stg}	−40 to +150	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case Coupling	Per Diode Per Device	$R_{\theta JC}$ $R_{\theta JC}$ $R_{\theta C}$	1.5 0.8 0.1	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Instantaneous Forward Voltage (1) I_F = 30 A, T_C = 25°C I_F = 30 A, T_C = 100°C	V_F	 1.5 1.4	V
Instantaneous Reverse Current (2) V_R = 400 V, T_C = 25°C V_R = 400 V, T_C = 100°C	I_R	 35 6	 µA mA

(1) Pulse Test: Pulse Width = 380 µs, Duty Cycle ≤ 2%
(2) Pulse Test: Pulse Width = 5 ms, Duty Cycle < 2%

Rev 1

RECOVERY CHARACTERISTICS

Test Conditions	Symbol	Typ	Max	Unit
I_F = 1 A, V_R = 30 V, dIF/dt = –15 A/µs	t_{rr}	—	100	ns
I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A		—	50	

TURN–OFF SWITCHING CHARACTERISTICS (without series inductance)

Test Conditions	Symbol	Typ	Max	Unit
V_{CC} = 200 V, I_F = 30 A, T_J = 100°C, L_p < 0.05 µH (See Figure 11)	t_{IRM}			ns
dIF/dt = –120 A/µs		—	75	
dIF/dt = –240 A/µs		50	—	
dIF/dt = –120 A/µs	I_{RM}	—	9	A
dIF/dt = –240 A/µs		12	—	

TURN–OFF OVERVOLTAGE COEFFICIENT (with series inductance)

Test Conditions	Symbol	Typ	Max	Unit
T_J = 100°C, V_{CC} = 60 V, I_F = $I_{F(AV)}$ dIF/dt = –30 A/µs, L_p = 1 µH (See Figure 12)	$C = \frac{V_{RP}}{V_{CC}}$	3.3	—	

4

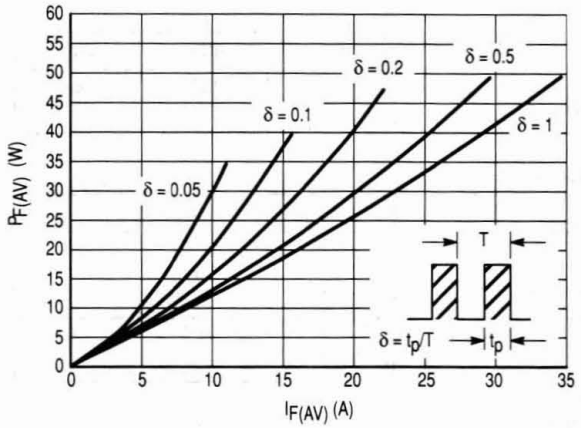

Figure 1. Low Frequency Power Losses versus Average Current

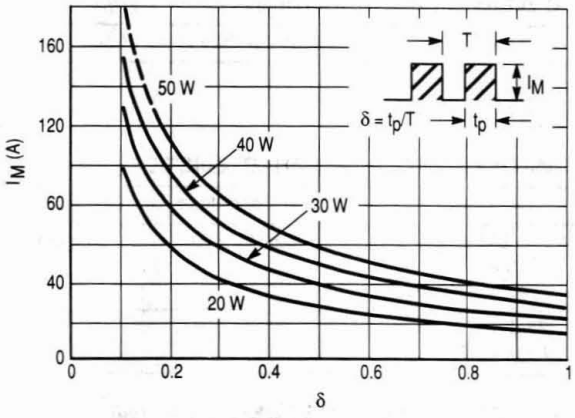

Figure 2. Peak Current versus Form Factor

4

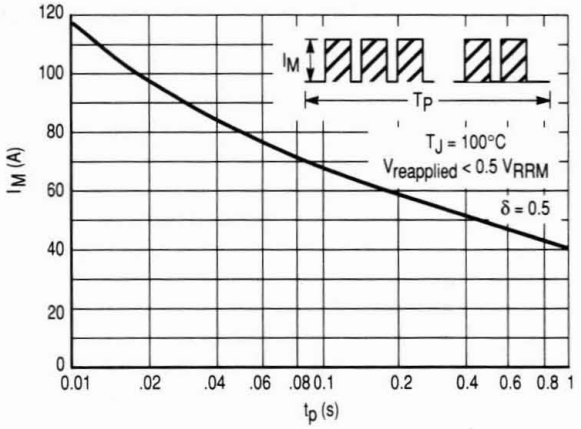

Figure 3. Non–Repetitive Peak Surge Current versus Overload Duration

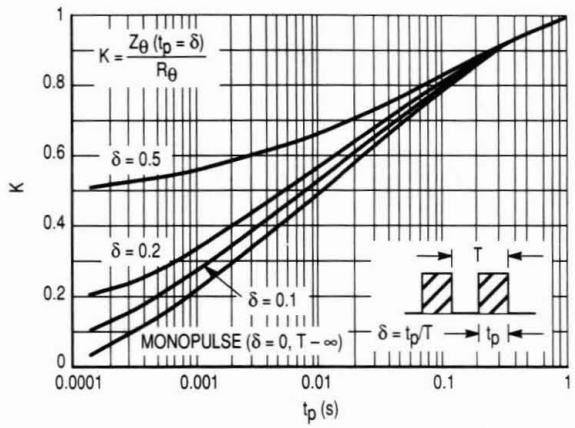

Figure 4. Relative Variation of Thermal Impedance Junction to Case versus Pulse Duration

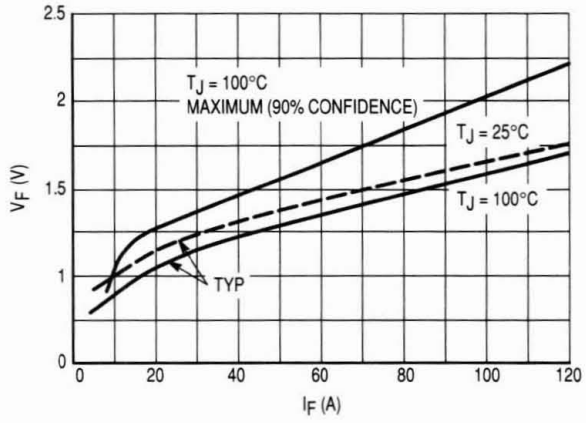

Figure 5. Voltage Drop versus Forward Current

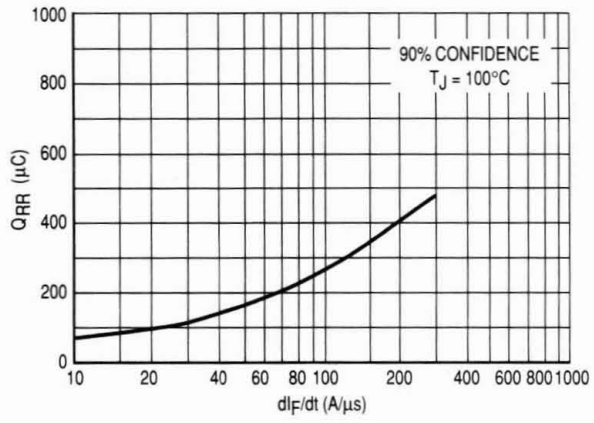

Figure 6. Recovery Charge versus dI_F/dt

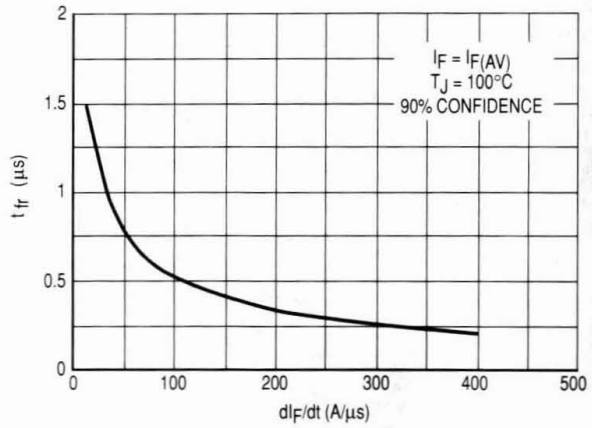

Figure 7. Recovery Time versus dI_F/dt

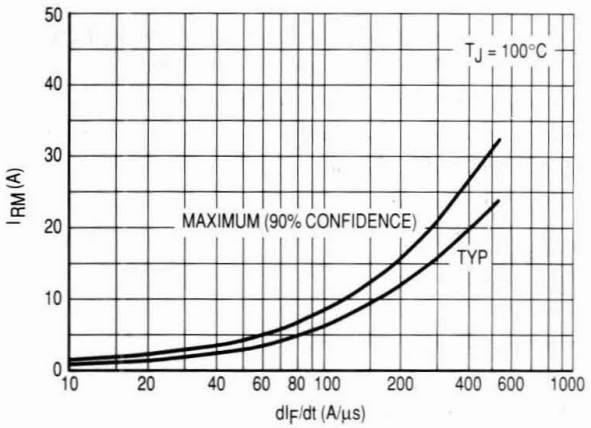

Figure 8. Peak Reverse Current versus dI_F/dt

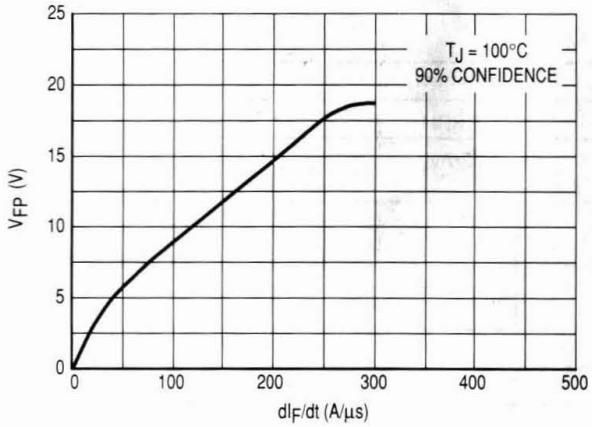

Figure 9. Peak Forward Voltage versus dI_F/dt

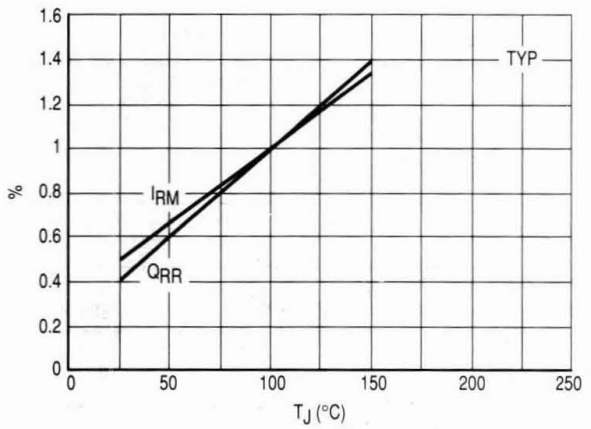

Figure 10. Dynamic Parameters versus Junction Temperature

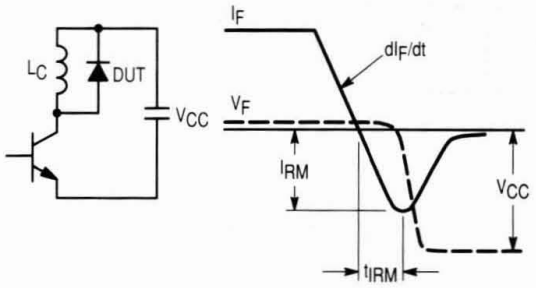

Figure 11. Turn–Off Switching Characteristics (Without series inductance)

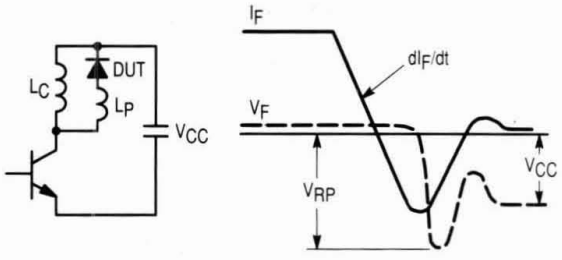

Figure 12. Turn–Off Switching Characteristics (With series inductance)

Ultrafast Power Rectifiers

BYT230PIV-1000M

Dual high voltage rectifiers suited for Switchmode Power Supplies and other power converters.

- Very Low Reverse Recovery Time
- Very Low Switching Losses
- Low Noise Turn–Off Switching
- Insulated Package:
  Insulating voltage = 2500 V_{RMS}
  Capacitance = 45 pF
- UL — UL Recognized, File #E69369

ULTRAFAST RECTIFIERS 60 AMPS 1000 VOLTS



SOT–227B, STYLE 3

Mechanical Characteristics

- Case: Molded epoxy with isolated metal base
- Weight: 28 g (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Shipped 10 units per plastic tube
- Marking: BYT230PIV–1000M

4

MAXIMUM RATINGS

Rating		Symbol	Max	Unit
Peak Repetitive Reverse Voltage		V_{RRM}	1000	V
Average Rectified Current T_C = 55°C	Per Device Per Diode	$I_{F(AV)}$	60 30	A
Peak Repetitive Forward Current, Per Diode t_p < 10 µs		I_{FRM}	375	A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	200	A
Operating Junction Temperature		T_J	−40 to +150	°C
Storage Temperature		T_{stg}	−40 to +150	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	Per Diode	$R_{\theta JC}$	1.5	°C/W
	Per Device	$R_{\theta JC}$	0.8	
Coupling		$R_{\theta C}$	0.1	

ELECTRICAL CHARACTERISTICS PER DIODE

Instantaneous Forward Voltage (1) I_F = 30 A, T_C = 25°C I_F = 30 A, T_C = 100°C	V_F	 1.9 1.8	V
Instantaneous Reverse Current (2) V_R = 1000 V, T_C = 25°C V_R = 1000 V, T_C = 100°C	I_R	 100 5	 µA mA

(1) Pulse Test: Pulse Width = 380 µs, Duty Cycle ≤ 2%
(2) Pulse Test: Pulse Width = 5 ms, Duty Cycle < 2%

Rev 1

RECOVERY CHARACTERISTICS

Test Conditions	Symbol	Typ	Max	Unit
I_F = 1 A, V_R = 30 V, dIF/dt = –15 A/μs	t_{rr}	—	165	ns
I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A		—	70	

TURN–OFF SWITCHING CHARACTERISTICS (without series inductance)

Test Conditions	Symbol	Typ	Max	Unit
V_{CC} = 200 V, I_F = 30 A, T_J = 100°C, L_p < 0.05 μH (See Figure 11)	t_{IRM}			ns
dIF/dt = –120 A/μs		—	200	
dIF/dt = –240 A/μs		120	—	
dIF/dt = –120 A/μs	I_{RM}	—	19.5	A
dIF/dt = –240 A/μs		22	—	

TURN–OFF OVERVOLTAGE COEFFICIENT (with series inductance)

Test Conditions	Symbol	Typ	Max	Unit
T_J = 100°C, V_{CC} = 200 V, I_F = $I_{F(AV)}$ dIF/dt = –30 A/μs, L_p = 5 μH (See Figure 12)	$C = \frac{V_{RP}}{V_{CC}}$	—	4.5	

4

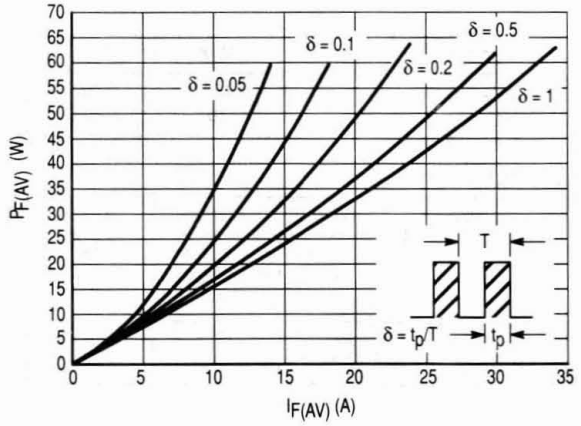

Figure 1. Low Frequency Power Losses versus Average Current

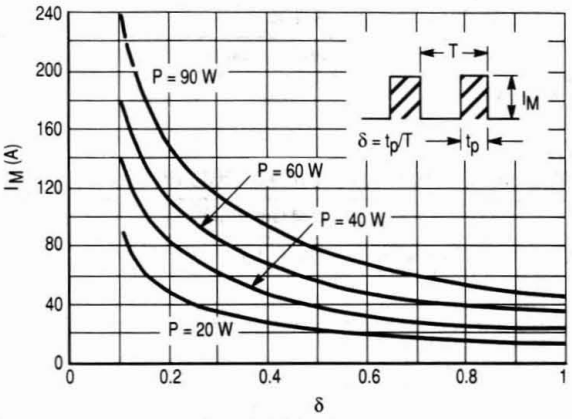

Figure 2. Peak Current versus Form Factor

4

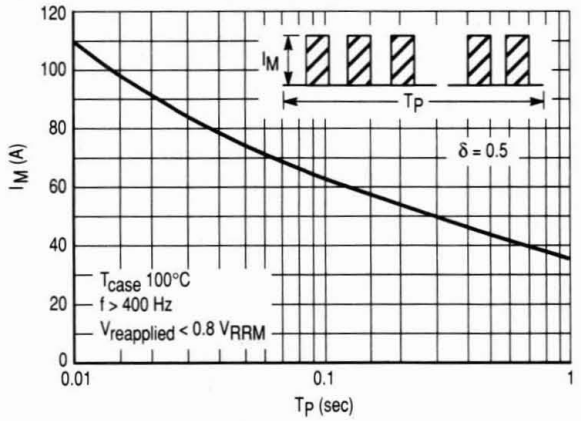

Figure 3. Non–Repetitive Peak Surge Current versus Overload Duration

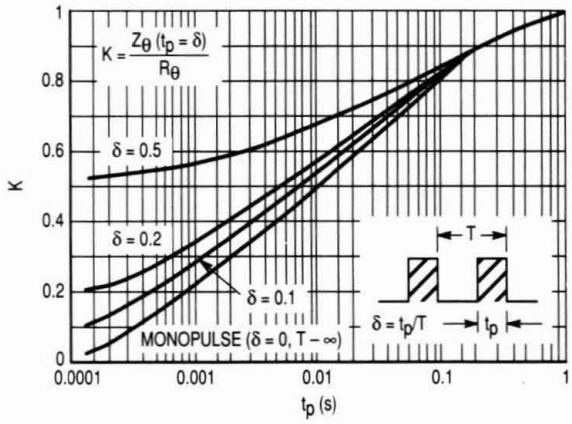

Figure 4. Relative Variation of Thermal Impedance Junction to Case versus Pulse Duration

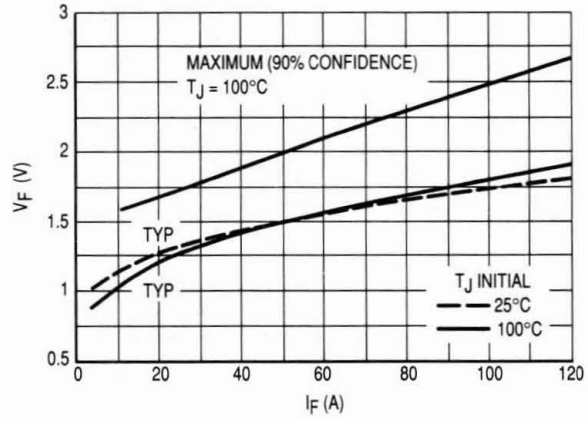

Figure 5. Voltage Drop versus Forward Current

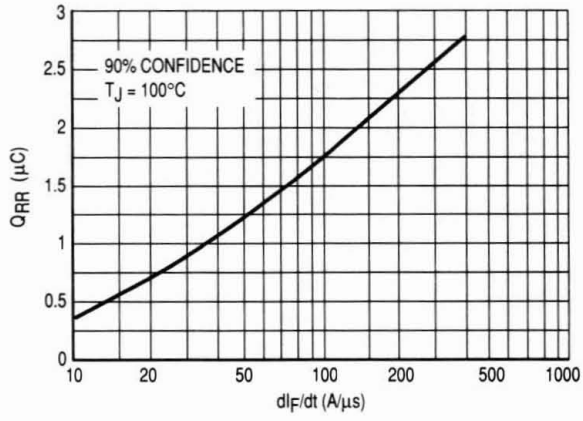

Figure 6. Recovery Charge versus dIF/dt

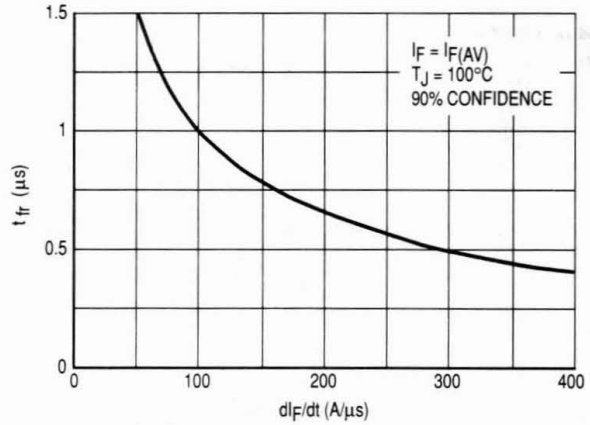

Figure 7. Recovery Time versus dI_F/dt

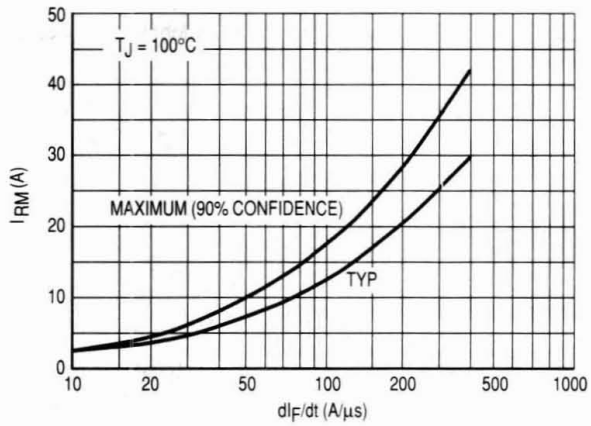

Figure 8. Peak Reverse Current versus dI_F/dt

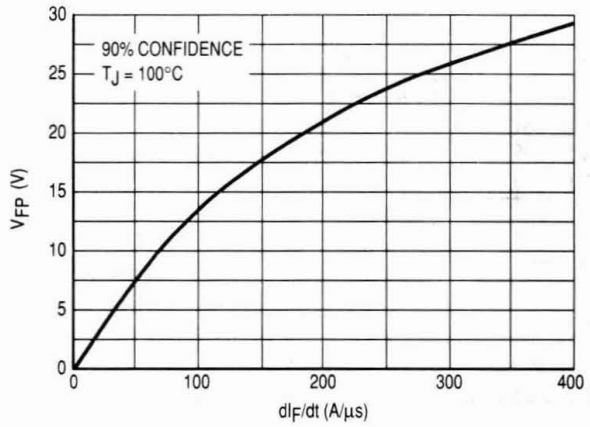

Figure 9. Peak Forward Voltage versus dI_F/dt

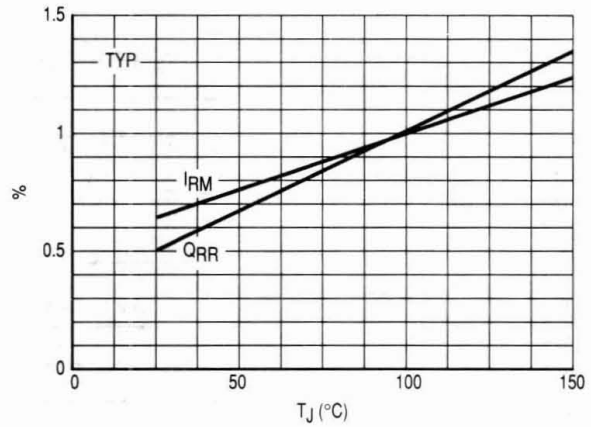

Figure 10. Dynamic Parameters versus Junction Temperature

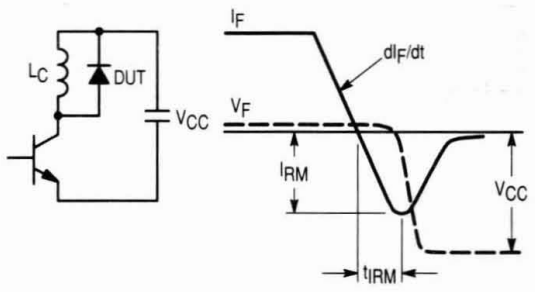

Figure 11. Turn–Off Switching Characteristics (Without series inductance)

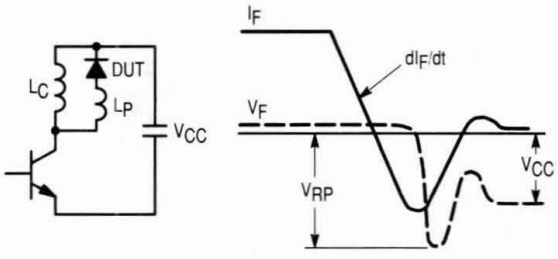

Figure 12. Turn–Off Switching Characteristics (With series inductance)

Ultrafast Power Rectifiers

BYT261PIV-400M

Dual high voltage rectifiers suited for Switchmode Power Supplies and other power converters.

- Very Low Reverse Recovery Time
- Very Low Switching Losses
- Low Noise Turn–Off Switching
- Insulated Package:
  Insulating voltage = 2500 V_{RMS}
  Capacitance = 45 pF
- UL — UL Recognized, File #E69369

ULTRAFAST RECTIFIERS 120 AMPS 400 VOLTS



SOT-227B, STYLE 2

Mechanical Characteristics

- Case: Molded epoxy with isolated metal base
- Weight: 28 g (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Shipped 10 units per plastic tube
- Marking: BYT261PIV–400M

4

MAXIMUM RATINGS

Rating		Symbol	Max	Unit
Peak Repetitive Reverse Voltage		V_{RRM}	400	V
Average Rectified Current T_C = 80°C	Per Device Per Diode	$I_{F(AV)}$	120 60	A
Peak Repetitive Forward Current, Per Diode t_p < 10 μs		I_{FRM}	800	A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	600	A
Operating Junction Temperature		T_J	−40 to +150	°C
Storage Temperature		T_{stg}	−40 to +150	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case Coupling	Per Diode Per Device	$R_{\theta JC}$ $R_{\theta JC}$ $R_{\theta C}$	0.85 0.5 0.1	°C/W

ELECTRICAL CHARACTERISTICS PER DIODE

Instantaneous Forward Voltage (1) I_F = 60 A, T_C = 25°C I_F = 60 A, T_C = 100°C	V_F	 1.5 1.4	V
Instantaneous Reverse Current (2) V_R = 400 V, T_C = 25°C V_R = 400 V, T_C = 100°C	I_R	 60 6	 μA mA

(1) Pulse Test: Pulse Width = 380 μs, Duty Cycle ≤ 2%
(2) Pulse Test: Pulse Width = 5 ms, Duty Cycle < 2%

Rev 1

RECOVERY CHARACTERISTICS

Test Conditions	Symbol	Typ	Max	Unit
I_F = 1 A, V_R = 30 V, dIF/dt = −15 A/μs	t_{rr}	—	100	ns
I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A		—	50	

TURN–OFF SWITCHING CHARACTERISTICS (without series inductance)

Test Conditions	Symbol	Typ	Max	Unit
V_{CC} = 200 V, I_F = 60 A, T_J = 100°C, L_p < 0.05 μH (See Figure 11)	t_{IRM}			ns
dIF/dt = −240 A/μs		—	75	
dIF/dt = −480 A/μs		50	—	
dIF/dt = −240 A/μs	I_{RM}	—	18	A
dIF/dt = −480 A/μs		24	—	

TURN–OFF OVERVOLTAGE COEFFICIENT (with series inductance)

Test Conditions	Symbol	Typ	Max	Unit
T_J = 100°C, V_{CC} = 120 V, I_F = $I_{F(AV)}$ dIF/dt = −60 A/μs, L_p = 0.8 μH (See Figure 12)	$C = \frac{VRP}{VCC}$	3.3	4	

4

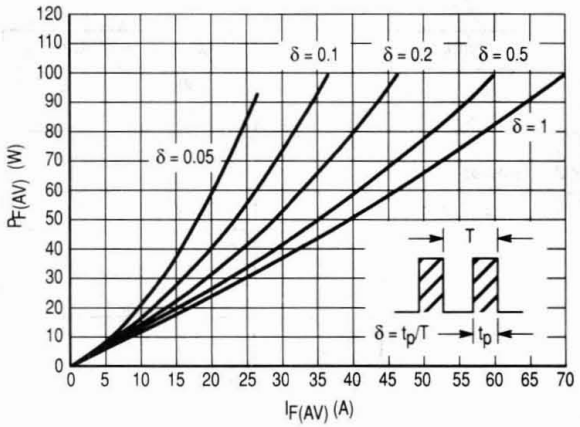

Figure 1. Low Frequency Power Losses versus Average Current

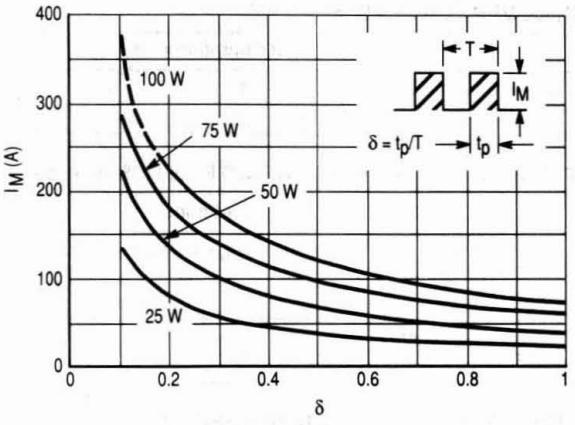

Figure 2. Peak Current versus Form Factor

4

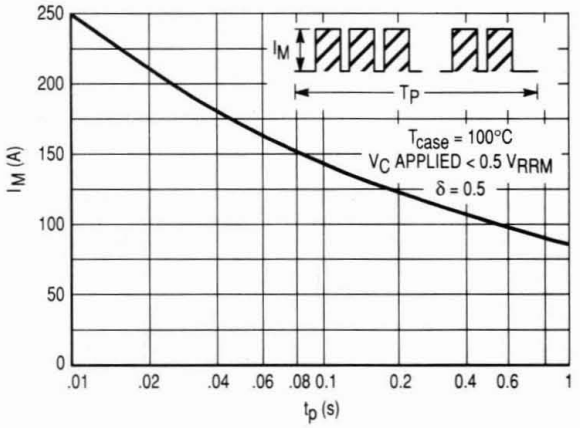

Figure 3. Non–Repetitive Peak Surge Current versus Overload Duration

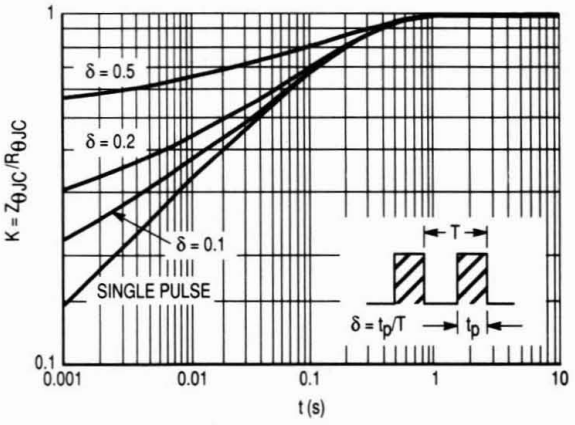

Figure 4. Relative Variation of Thermal Impedance Junction to Case versus Pulse Duration

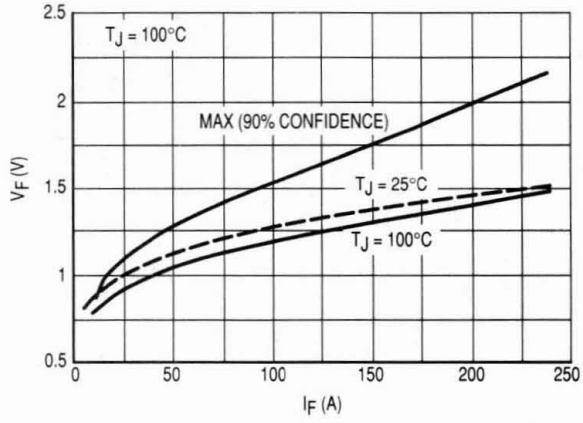

Figure 5. Voltage Drop versus Forward Current

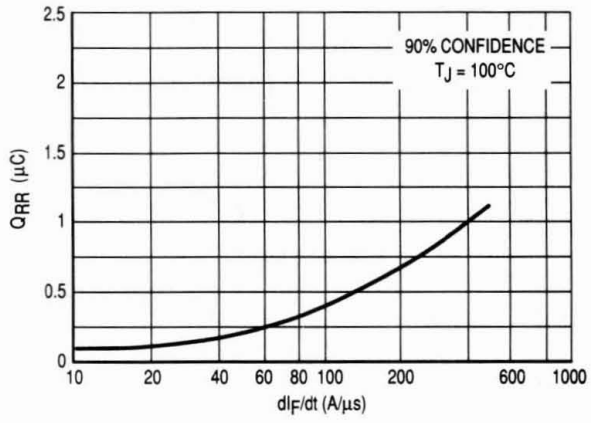

Figure 6. Recovery Charge versus dIF/dt

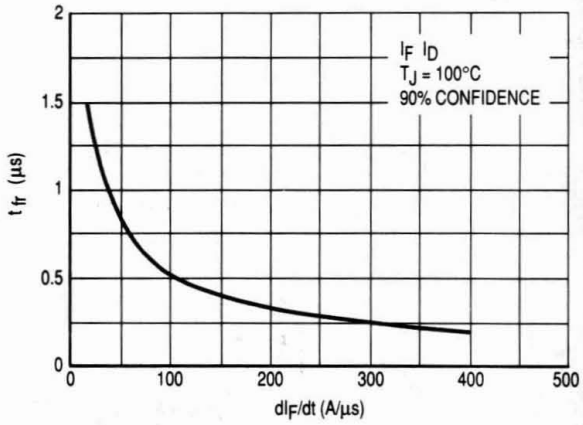

Figure 7. Recovery Time versus dI_F/dt

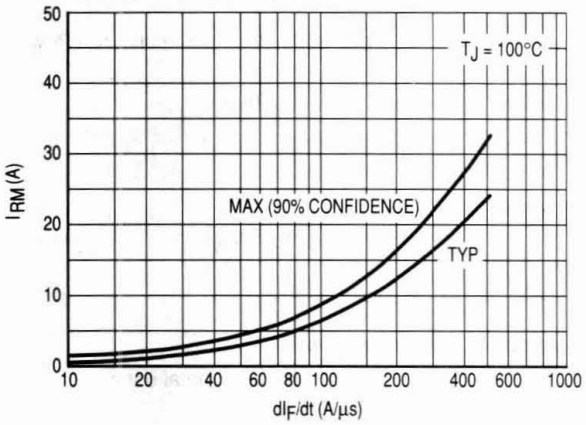

Figure 8. Peak Reverse Current versus dI_F/dt

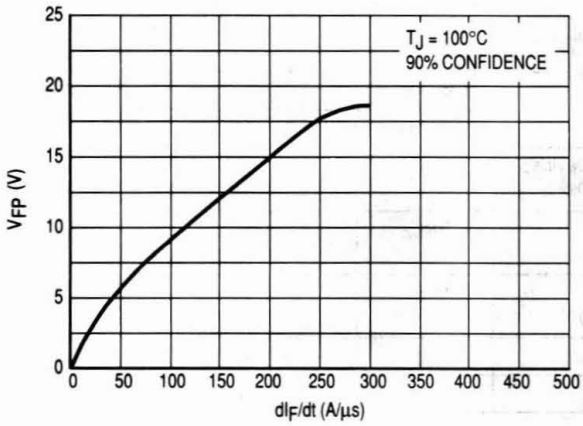

Figure 9. Peak Forward Voltage versus dI_F/dt

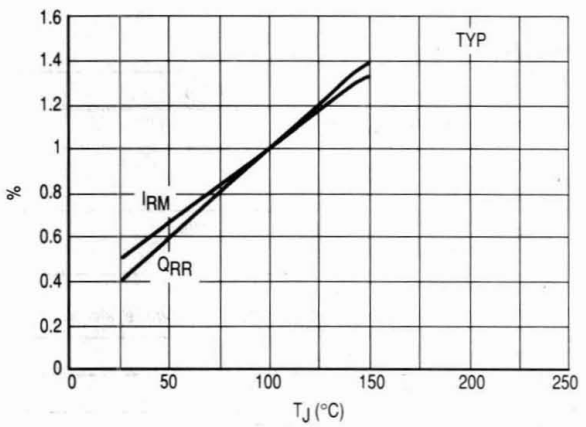

Figure 10. Dynamic Parameters versus Junction Temperature

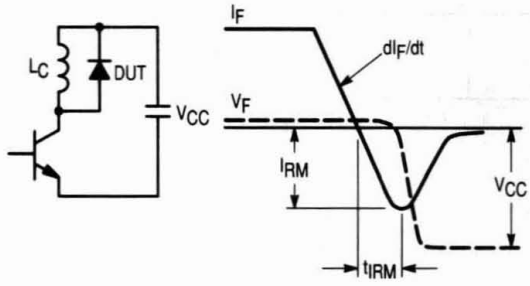

Figure 11. Turn–Off Switching Characteristics (Without series inductance)

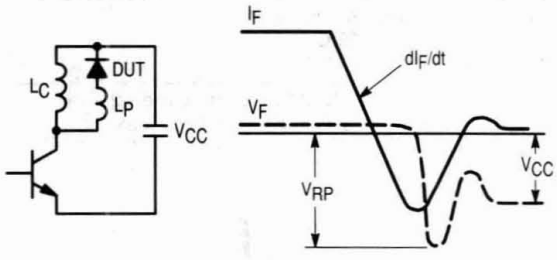

Figure 12. Turn–Off Switching Characteristics (With series inductance)

Ultrafast Power Rectifiers

BYT261PIV-1000M

ULTRAFAST RECTIFIERS 120 AMPS 1000 VOLTS

Dual high voltage rectifiers suited for Switchmode Power Supplies and other power converters.

- Very Low Reverse Recovery Time
- Very Low Switching Losses
- Low Noise Turn–Off Switching
- Insulated Package:
  Insulating voltage = 2500 V_{RMS}
  Capacitance = 45 pF
- UL — UL Recognized, File #E69369

Mechanical Characteristics

- Case: Molded epoxy with isolated metal base
- Weight: 28 g (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Shipped 10 units per plastic tube
- Marking: BYT261PIV–1000M



SOT–227B, STYLE 2

4

MAXIMUM RATINGS

Rating		Symbol	Max	Unit
Peak Repetitive Reverse Voltage		V_{RRM}	1000	V
Average Rectified Current T_C = 60°C	Per Device Per Diode	$I_{F(AV)}$	120 60	A
Peak Repetitive Forward Current, Per Diode t_p < 10 μs		I_{FRM}	750	A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	400	A
Operating Junction Temperature		T_J	−40 to +150	°C
Storage Temperature		T_{stg}	−40 to +150	°C

THERMAL CHARACTERISTICS

Thermal Resistance, Junction to Case	Per Diode Per Device	$R_{\theta JC}$ $R_{\theta JC}$	1.1 0.6	°C/W
Coupling		$R_{\theta C}$	0.1	

ELECTRICAL CHARACTERISTICS PER DIODE

Instantaneous Forward Voltage (1) I_F = 60 A, T_C = 25°C I_F = 60 A, T_C = 100°C	V_F	 1.9 1.8	V
Instantaneous Reverse Current (2) V_R = 1000 V, T_C = 25°C V_R = 1000 V, T_C = 100°C	I_R	 100 6	 μA mA

(1) Pulse Test: Pulse Width = 380 μs, Duty Cycle ≤ 2%
(2) Pulse Test: Pulse Width = 5 ms, Duty Cycle < 2%

Rev 1

RECOVERY CHARACTERISTICS

Test Conditions	Symbol	Typ	Max	Unit
I_F = 1 A, V_R = 30 V, dIF/dt = –15 A/μs	t_{rr}	—	170	ns
I_F = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A		—	70	

TURN–OFF SWITCHING CHARACTERISTICS (without series inductance)

Test Conditions	Symbol	Typ	Max	Unit
V_{CC} = 200 V, I_F = 60 A, T_J = 100°C, L_p < 0.05 μH (See Figure 11)	t_{IRM}			ns
dIF/dt = –240 A/μs		—	200	
dIF/dt = –480 A/μs		120	—	
dIF/dt = –240 A/μs	I_{RM}	—	40	A
dIF/dt = –480 A/μs		44	—	

TURN–OFF OVERVOLTAGE COEFFICIENT (with series inductance)

Test Conditions	Symbol	Typ	Max	Unit
T_J = 100°C, V_{CC} = 200 V, I_F = $I_{F(AV)}$ dIF/dt = –60 A/μs, L_p = 2.5 μH (See Figure 12)	$C = \frac{V_{RP}}{V_{CC}}$	3.3	4.5	

4

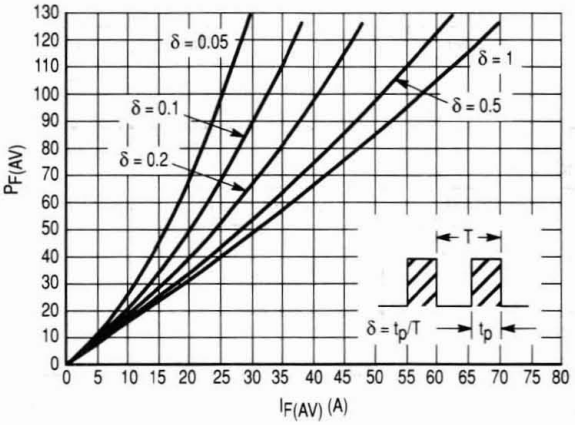

Figure 1. Low Frequency Power Losses versus Average Current

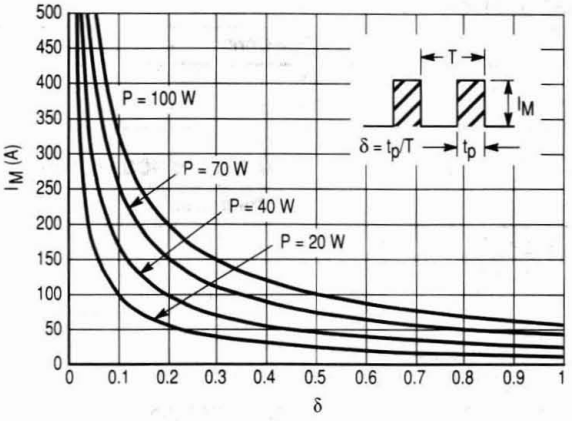

Figure 2. Peak Current versus Form Factor

4

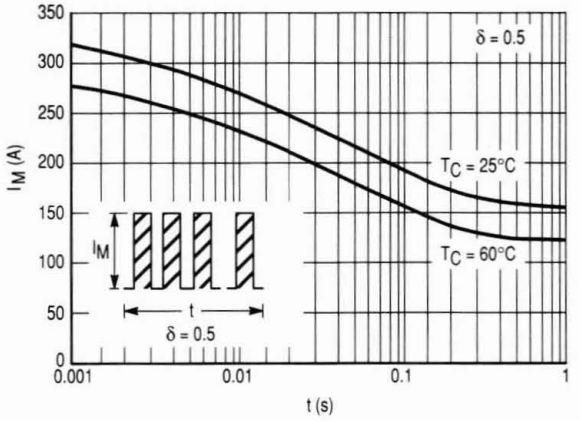

Figure 3. Non–Repetitive Peak Surge Current versus Overload Duration

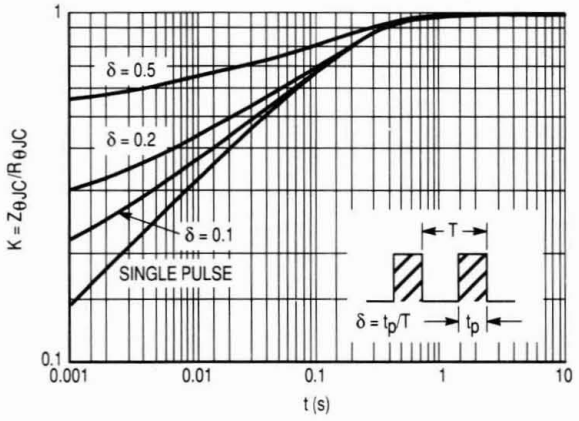

Figure 4. Relative Variation of Thermal Impedance Junction to Case versus Pulse Duration

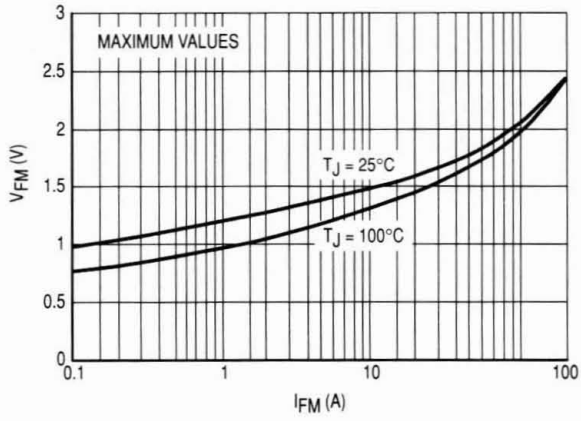

Figure 5. Voltage Drop versus Forward Current

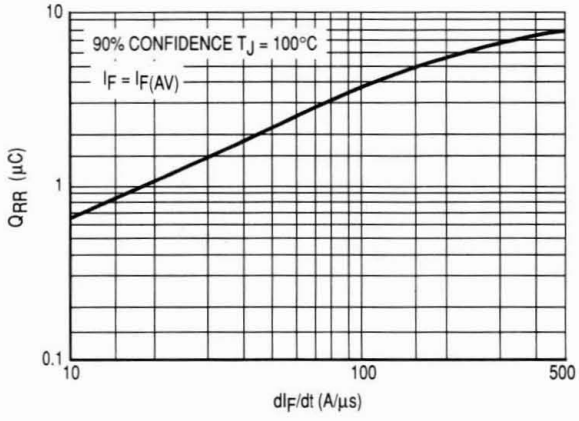

Figure 6. Recovery Charge versus dIF/dt

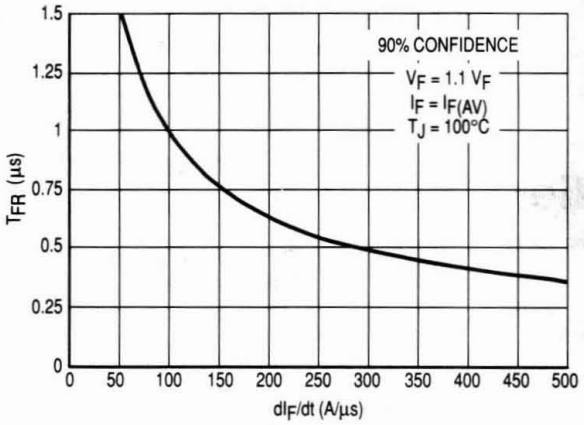

Figure 7. Recovery Time versus dI_F/dt

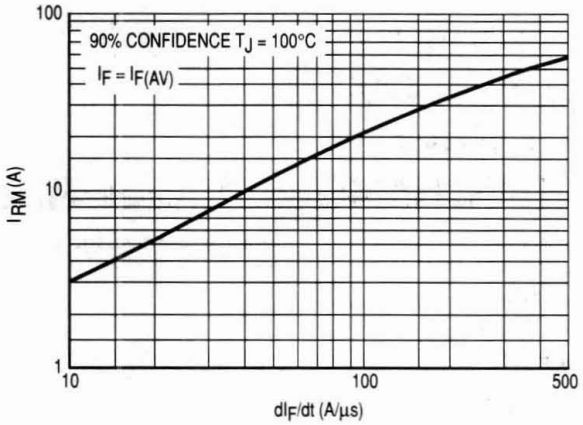

Figure 8. Peak Reverse Current versus dI_F/dt

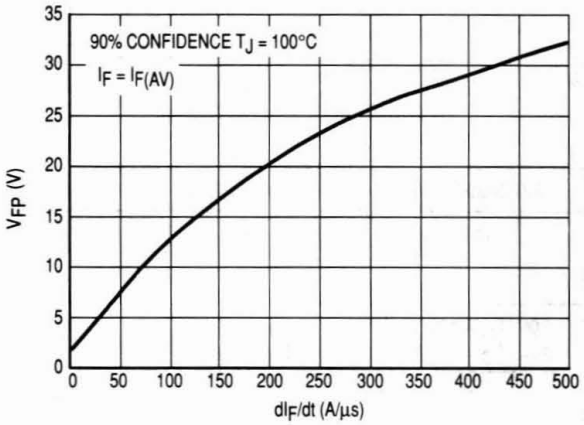

Figure 9. Peak Forward Voltage versus dI_F/dt

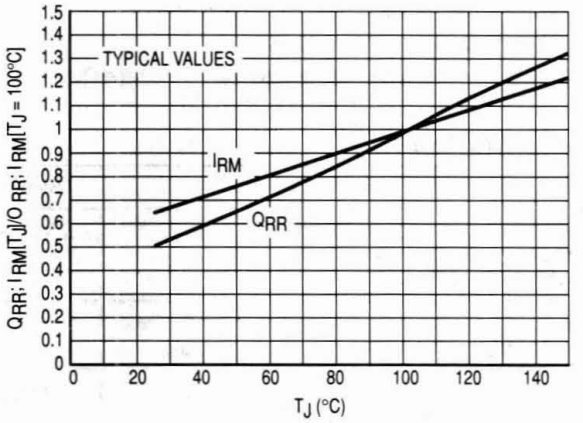

Figure 10. Dynamic Parameters versus Junction Temperature

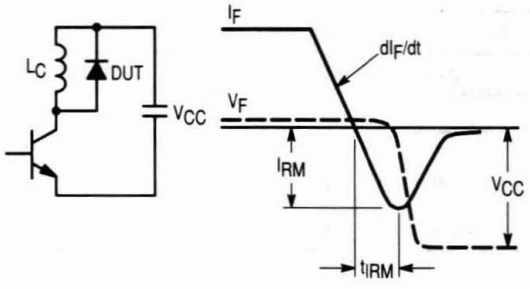

Figure 11. Turn–Off Switching Characteristics (Without series inductance)

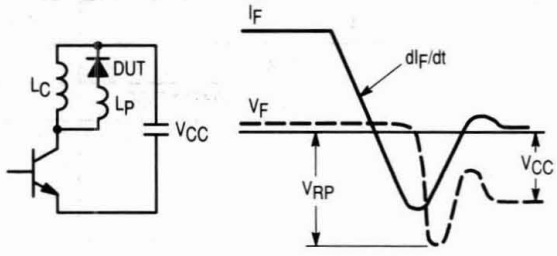

Figure 12. Turn–Off Switching Characteristics (With series inductance)

MURP20020CT
MURP20040CT

Motorola Preferred Devices

Preliminary Data Sheet

POWERTAP II
Ultrafast
SWITCHMODE Power Rectifier

. . . designed for use in switching power supplies, inverters, and as free wheeling diodes. This state-of-the-art device has the following features:

- Dual Diode Construction
- Low Leakage Current
- Low Forward Voltage
- 175°C Operating Junction Temperature
- Labor Saving POWERTAP Package

Mechanical Characteristics:

- Case: Epoxy, Molded with metal heatsink base
- Weight: 80 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant
- Top Terminal Torque: 25 – 40 lb – in max
- Base Plate Torques: See procedure given in the Package Outline Section
- Shipped 25 units per foam
- Marking: UP20020

ULTRAFAST RECTIFIER

200 AMPERES
200 – 400 VOLTS

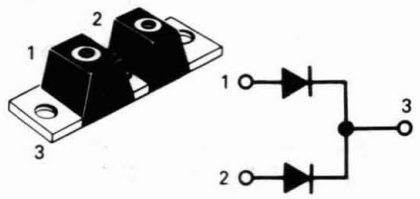

CASE 357C-03
POWERTAP II

4

MAXIMUM RATINGS

Rating		Symbol	MURP20020CT	MURP20040CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V_{RRM} V_{RWM} V_R	200	400	Volts
Average Rectified Forward Current (Rated V_R)	Per Device Per Leg	$I_{F(AV)}$	200 (T_C = 130°C) 100 (T_C = 130°C)	200 (T_C = 100°C) 100 (T_C = 100°C)	Amps
Peak Repetitive Forward Current, Per Leg (Rated V_R, Square Wave, 20 kHz), T_C = 95°C		I_{FRM}	200	200	Amps
Nonrepetitive Peak Surge Current Per Leg (Surge applied at rated load conditions halfwave, single phase, 60 Hz)		I_{FSM}	800	800	Amps
Operating Junction Temperature		T_J	−55 to +175	−55 to +175	°C
Storage Temperature		T_{stg}	−55 to +150	−55 to +150	°C

THERMAL CHARACTERISTICS PER LEG

Rating	Symbol	Max		Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.45	0.45	°C/W

ELECTRICAL CHARACTERISTICS PER LEG

Instantaneous Forward Voltage (1) (i_F = 100 Amp, T_C = +25°C) (i_F = 200 Amp, T_C = 25°C) (i_F = 100 Amp, T_C = 125°C)	v_F	 1.00 1.10 0.95	 1.30 1.75 1.15	Volts
Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 125°C) (Rated dc Voltage, T_C = 25°C)	i_R	 1000 150	 500 50	μA
Maximum Reverse Recovery Time (I_F = 1.0 Amps, di/dt = 50 Amps/μs)	t_{rr}	50	75	ns

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 2

Section 5

Standard and Fast Recovery Data Sheets

Axial-Lead Standard Recovery Rectifiers

1N4001 thru 1N4007

1N4004 and 1N4007 are Motorola Preferred Devices

This data sheet provides information on subminiature size, axial lead mounted rectifiers for general–purpose low–power applications.

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 1000 per bag.
- Available Tape and Reeled, 5000 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: 1N4001, 1N4002, 1N4003, 1N4004, 1N4005, 1N4006, 1N4007

LEAD MOUNTED RECTIFIERS 50–1000 VOLTS DIFFUSED JUNCTION

CASE 59–03 DO–41

5

MAXIMUM RATINGS

Rating	Symbol	1N4001	1N4002	1N4003	1N4004	1N4005	1N4006	1N4007	Unit
*Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	1000	Volts
*Non–Repetitive Peak Reverse Voltage (halfwave, single phase, 60 Hz)	V_{RSM}	60	120	240	480	720	1000	1200	Volts
*RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	Volts
*Average Rectified Forward Current (single phase, resistive load, 60 Hz, see Figure 8, T_A = 75°C)	I_O	1.0							Amp
*Non–Repetitive Peak Surge Current (surge applied at rated load conditions, see Figure 2)	I_{FSM}	30 (for 1 cycle)							Amp
Operating and Storage Junction Temperature Range	T_J T_{stg}	– 65 to +175							°C

ELECTRICAL CHARACTERISTICS*

Rating	Symbol	Typ	Max	Unit
Maximum Instantaneous Forward Voltage Drop (i_F = 1.0 Amp, T_J = 25°C) Figure 1	v_F	0.93	1.1	Volts
Maximum Full–Cycle Average Forward Voltage Drop (I_O = 1.0 Amp, T_L = 75°C, 1 inch leads)	$V_{F(AV)}$	—	0.8	Volts
Maximum Reverse Current (rated dc voltage) (T_J = 25°C) (T_J = 100°C)	I_R	 0.05 1.0	 10 50	μA
Maximum Full–Cycle Average Reverse Current (I_O = 1.0 Amp, T_L = 75°C, 1 inch leads)	$I_{R(AV)}$	—	30	μA

*Indicates JEDEC Registered Data

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 5

Axial-Lead Fast-Recovery Rectifiers

1N4933 thru 1N4937
1N4935 and 1N4937 are Motorola Preferred Devices

FAST RECOVERY RECTIFIERS 50–600 VOLTS 1.0 AMPERE

Axial–lead, fast–recovery rectifiers are designed for special applications such as dc power supplies, inverters, converters, ultrasonic systems, choppers, low RF interference and free wheeling diodes. A complete line of fast recovery rectifiers having typical recovery time of 150 nanoseconds providing high efficiency at frequencies to 250 kHz.

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 0.4 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 1000 per bag.
- Available Tape and Reeled, 5000 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: 1N4933, 1N4934, 1N4935, 1N4936, 1N4937

CASE 59–03
DO–41

5

MAXIMUM RATINGS (1)

Rating	Symbol	1N4933	1N4934	1N4935	1N4936	1N4937	Unit
*Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	Volts
*Non–Repetitive Peak Reverse Voltage RMS Reverse Voltage	V_{RSM} $V_{R(RMS)}$	75 35	150 70	250 140	450 280	650 420	Volts
*Average Rectified Forward Current (Single phase, resistive load, T_A = 75°C) (2)	I_O	1.0					Amp
*Non–Repetitive Peak Surge Current (Surge applied at rated load conditions)	I_{FSM}	30					Amps
Operating Junction Temperature Range Storage Temperature Range	T_J T_{stg}	– 65 to +150 – 65 to +150					°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient (Typical Printed Circuit Board Mounting)	$R_{\theta JC}$	65	°C/W

*Indicates JEDEC Registered Data for 1N4933 Series.

(1) Ratings at 25°C ambient temperature unless otherwise specified.
(2) Derate by 20% for capacitive loads.

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 3

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
Instantaneous Forward Voltage (I_F = 3.14 Amp, T_J = 125°C)	v_F	—	1.0	1.2	Volts
Forward Voltage (I_F = 1.0 Amp, T_A = 25°C)	V_F	—	1.0	1.1	Volts
*Reverse Current (Rated dc Voltage) T_A = 25°C T_A = 100°C	I_R	— —	1.0 50	5.0 100	μA

*REVERSE RECOVERY CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Recovery Time (I_F = 1.0 Amp to V_R = 30 Vdc) (I_{FM} = 15 Amp, di/dt = 10 A/μs)	t_{rr}	 — —	 150 175	 200 300	ns
Reverse Recovery Current (I_F = 1.0 Amp to V_R = 30 Vdc)	$I_{RM(REC)}$	—	1.0	2.0	Amp

*Indicates JEDEC Registered Data for 1N4933 Series.

5

Axial-Lead Standard Recovery Rectifiers

1N5400 thru 1N5408

1N5404 and 1N5406 are Motorola Preferred Devices

STANDARD RECOVERY RECTIFIERS 50–1000 VOLTS 3.0 AMPERE

Lead mounted standard recovery rectifiers are designed for use in power supplies and other applications having need of a device with the following features:

- High Current to Small Size
- High Surge Current Capability
- Low Forward Voltage Drop
- Void–Free Economical Plastic Package
- Available in Volume Quantities

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.1 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 5,000 per bag.
- Available Tape and Reeled, 1500 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: 1N5400, 1N5401, 1N5402, 1N5404, 1N5406, 1N5407, 1N5408

CASE 267–03

5

MAXIMUM RATINGS

Rating	Symbol	1N5400	1N5401	1N5402	1N5404	1N5406	1N5407	1N5408	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	1000	Volts
Non–repetitive Peak Reverse Voltage	V_{RSM}	100	200	300	525	800	1000	1200	Volts
Average Rectified Forward Current (Single Phase Resistive Load, 1/2″ Leads, T_L = 105°C)	I_O	3.0							Amp
Non–repetitive Peak Surge Current (Surge Applied at Rated Load Conditions)	I_{FSM}	200 (one cycle)							Amp
Operating and Storage Junction Temperature Range	T_J T_{stg}	– 65 to +170 – 65 to +175							°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Typ	Unit
Thermal Resistance, Junction to Ambient (PC Board Mount, 1/2″ Leads)	$R_{\theta JA}$	53	°C/W

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
*Instantaneous Forward Voltage (1) (i_F = 9.4 Amp)	v_F	—	—	1.2	Volts
Average Reverse Current (1) DC Reverse Current (Rated dc Voltage, T_L = 80°C)	$I_{R(AV)}$ I_R	— —	— —	500 500	μA

*JEDEC Registered Data.

(1) Measured in a single phase halfwave circuit such as shown in Figure 6.25 of EIA RS–282, November 1963. Operated at rated load conditions T_L = 80°C, I_O = 3.0 A, $V_r = V_{RWM}$.

Preferred devices are Motorola recommended choices for future use and best overall value.

Ratings at 25°C ambient temperature unless otherwise specified.

60 Hz resistive or inductive loads.

For capacitive load, derate current by 20%.

Rev 2

Axial Lead Fast Recovery Rectifiers

MR850
MR851
MR852
MR854
MR856

MR852 and MR856 are Motorola Preferred Devices

FAST RECOVERY POWER RECTIFIERS 50–600 VOLTS 3.0 AMPERES

CASE 267–03

Axial lead mounted fast recovery power rectifiers are designed for special applications such as dc power supplies, inverters, converters, ultrasonic systems, choppers, low RF interference and free wheeling diodes. A complete line of fast recovery rectifiers having typical recovery time of 100 nanoseconds providing high efficiency at frequencies to 250 kHz.

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.1 gram (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16″ from case
- Shipped in plastic bags, 5,000 per bag.
- Available Tape and Reeled, 1500 per reel, by adding a "RL" suffix to the part number
- Polarity: Cathode Indicated by Polarity Band
- Marking: R850, R851, R852, R854, R856

5

MAXIMUM RATINGS

Rating	Symbol	MR850	MR851	MR852	MR854	MR856	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	Volts
Non–Repetitive Peak Reverse Voltage	V_{RSM}	75	150	250	450	650	Volts
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	Volts
Average Rectified Forward Current (Single phase resistive load, T_A = 80°C)	I_O	3.0					Amp
Non–Repetitive Peak Surge Current (surge applied at rated load conditions)	I_{FSM}	100 (one cycle)					Amp
Operating and Storage Junction Temperature Range	T_J, T_{stg}	– 65 to +125 – 65 to +150					°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient (Recommended Printed Circuit Board Mounting, See Note 4, Page 5)	$R_{\theta JA}$	28	°C/W

Preferred devices are Motorola recommended choices for future use and best overall value.

Rev 2

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
Forward Voltage (I_F = 3.0 Amp, T_J = 25°C)	V_F	—	1.04	1.25	Volts
Reverse Current (rated dc voltage) T_J = 25°C	I_R	—	2.0	10	μA
T_J = 80°C MR850		—	—	150	
T_J = 80°C MR851		—	60	150	
T_J = 80°C MR852		—	—	200	
T_J = 80°C MR854		—	—	250	
T_J = 80°C MR856		—	100	300	

REVERSE RECOVERY CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Recovery Time	t_{rr}				ns
(I_F = 1.0 Amp to V_R = 30 Vdc, Figure 9)		—	100	200	
(I_F = 15 Amp, di/dt = 10 A/μs, Figure 10)		—	150	300	
Reverse Recovery Current (I_F = 1.0 Amp to V_R = 30 Vdc, Figure 9)	$I_{RM(REC)}$	—	—	2.0	Amp

5

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

MR750
MR751 MR752
MR754 MR756
MR758 MR760

MR754 and MR760 are
Motorola Preferred Devices

Designers Data Sheet

High Current Lead Mounted Rectifiers

- Current Capacity Comparable To Chassis Mounted Rectifiers
- Very High Surge Capacity
- Insulated Case

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 2.5 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Polarity: cathode polarity band
- Shipped 1000 units per plastic bag. Available Tape and Reeled, 800 units per reel by adding a "RL" suffix to the part number
- Marking: R750, R751, R752, R754, R758, R760

**HIGH CURRENT
LEAD MOUNTED
SILICON RECTIFIERS
50–1000 VOLTS
DIFFUSED JUNCTION**

CASE 194-04

***MAXIMUM RATINGS**

Characteristic	Symbol	MR750	MR751	MR752	MR754	MR756	MR758	MR760	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	800	1000	Volts
Non-Repetitive Peak Reverse Voltage (halfwave, single phase, 60 Hz peak)	V_{RSM}	60	120	240	480	720	960	1200	Volts
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	Volts
Average Rectified Forward Current (single phase, resistive load, 60 Hz) See Figures 5 and 6	I_O	22 (T_L = 60°C, 1/8" Lead Lengths) 6.0 (T_A = 60°C, P.C. Board mounting)							Amp
Non-Repetitive Peak Surge Current (surge applied at rated load conditions)	I_{FSM}	400 (for 1 cycle)							Amp
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +175							°C

ELECTRICAL CHARACTERISTICS

Characteristic and Conditions	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage Drop (i_F = 100 Amp, T_J = 25°C)	v_F	1.25	Volts
Maximum Forward Voltage Drop (I_F = 6.0 Amp, T_A = 25°C, 3/8" leads)	V_F	0.90	Volts
Maximum Reverse Current (T_J = 25°C (rated dc voltage) T_J = 100°C	I_R	25 1.0	μA mA

Rev 2

FIGURE 1 – FORWARD VOLTAGE

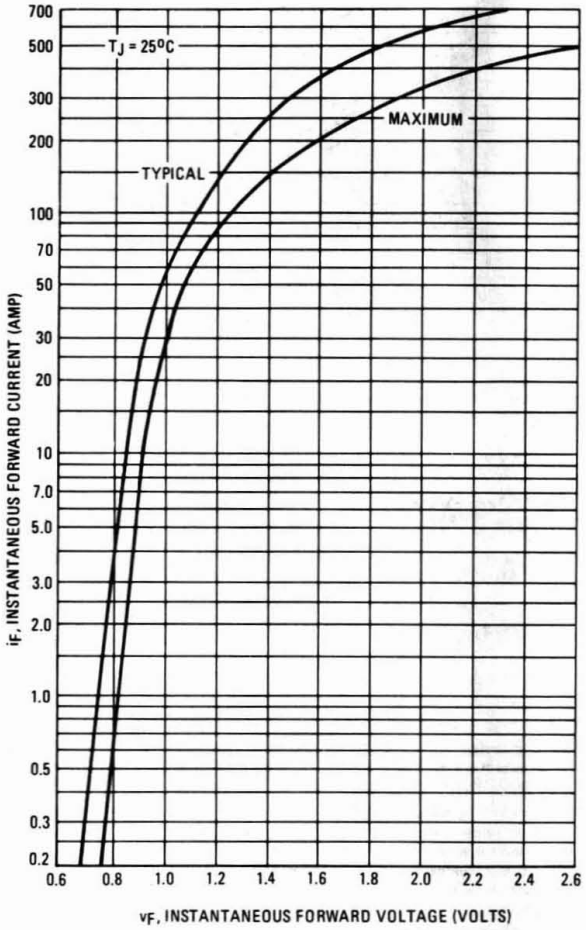

FIGURE 2 – MAXIMUM SURGE CAPABILITY

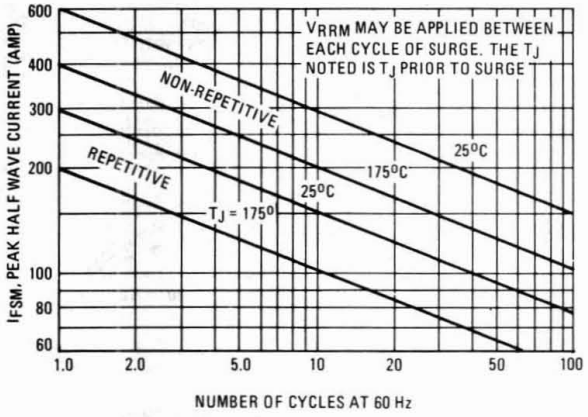

FIGURE 3 – FORWARD VOLTAGE TEMPERATURE COEFFICIENT

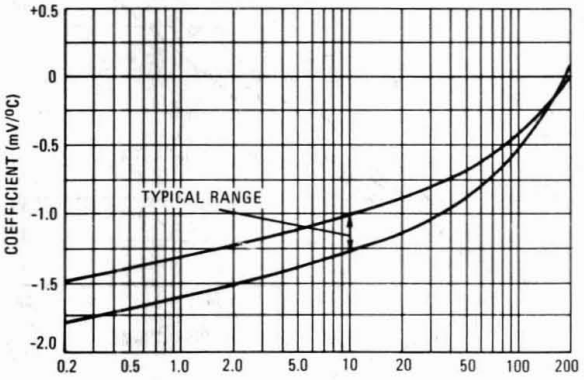

FIGURE 4 – TYPICAL TRANSIENT THERMAL RESISTANCE

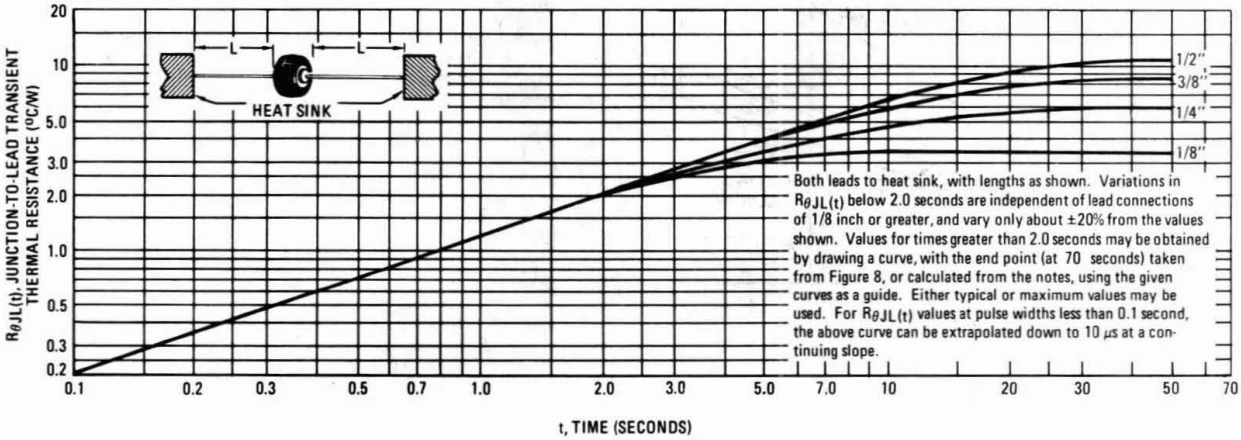

5

FIGURE 5 – MAXIMUM CURRENT RATINGS

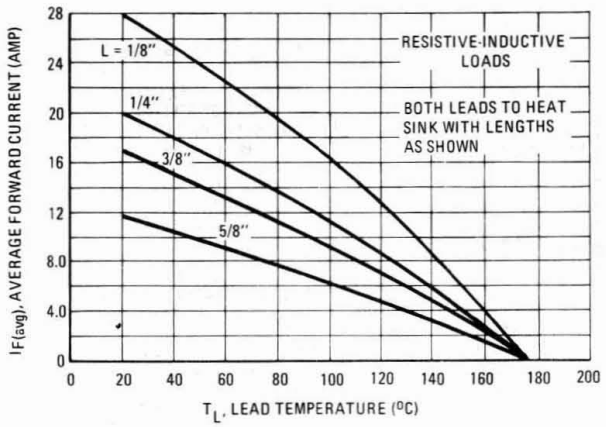

FIGURE 6 – MAXIMUM CURRENT RATINGS

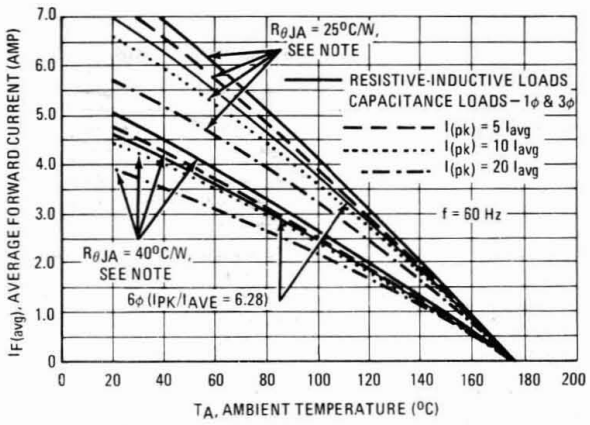

FIGURE 7 – POWER DISSIPATION

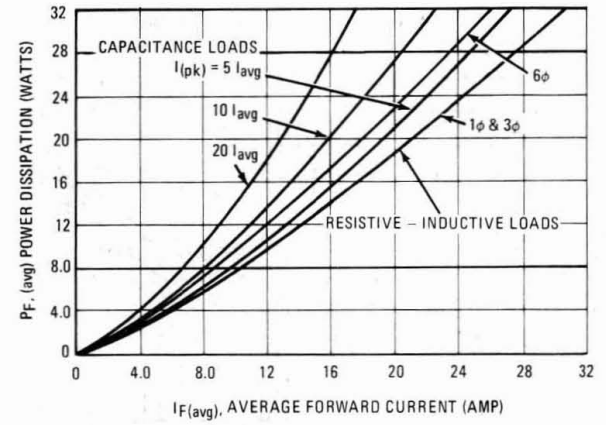

FIGURE 8 – STEADY STATE THERMAL RESISTANCE

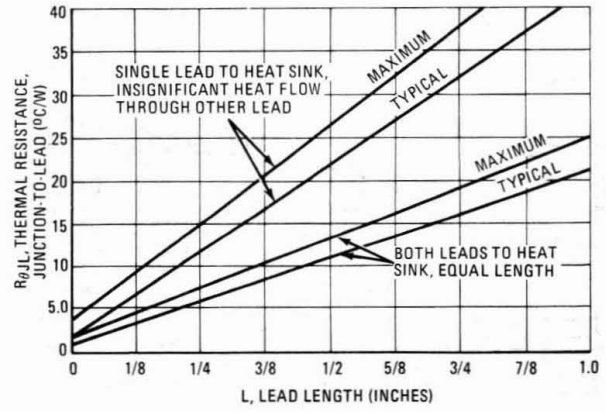

NOTES

THERMAL CIRCUIT MODEL

(For Heat Conduction Through The Leads)

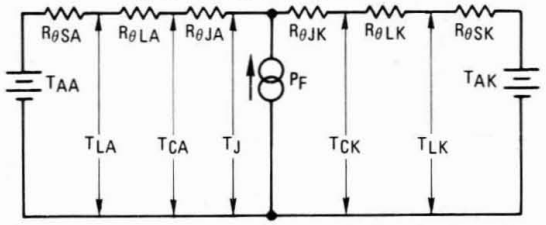

Use of the above model permits junction to lead thermal resistance for any mounting configuration to be found. Lowest values occur when one side of the rectifier is brought as close as possible to the heat sink as shown below. Terms in the model signify:

T_A = Ambient Temperature — $R_{\theta S}$ = Thermal Resistance, Heat Sink to Ambient
T_L = Lead Temperature — $R_{\theta L}$ = Thermal Resistance, Lead to Heat Sink
T_C = Case Temperature — $R_{\theta J}$ = Thermal Resistance, Junction to Case
T_J = Junction Temperature — P_F = Power Dissipation

(Subscripts A and K refer to anode and cathode sides respectively.)

Values for thermal resistance components are:

$R_{\theta L}$ = 40°C/W/IN. Typically and 44°C/W/IN Maximum

$R_{\theta J}$ = 2°C/W Typically and 4°C/W Maximum

Since $R_{\theta J}$ is so low, measurements of the case temperature, T_C, will be approximately equal to junction temperature in practical lead mounted applications. When used as a 60 Hz rectifier, the slow thermal response holds $T_{J(PK)}$ close to $T_{J(AVG)}$. Therefore maximum lead temperature may be found from: $T_L = 175° - R_{\theta JL} P_F$. P_F may be found from Figure 7.

The recommended method of mounting to a P.C. board is shown on the sketch, where $R_{\theta JA}$ is approximately 25°C/W for a 1-1/2" x 1-1/2" copper surface area. Values of 40°C/W are typical for mounting to terminal strips or P.C. boards where available surface area is small.

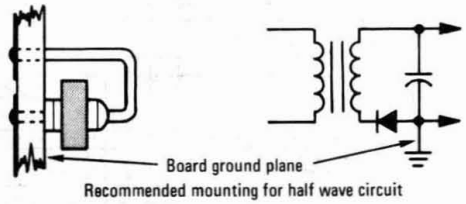

Recommended mounting for half wave circuit

TYPICAL DYNAMIC CHARACTERISTICS

FIGURE 9 – RECTIFICATION EFFICIENCY

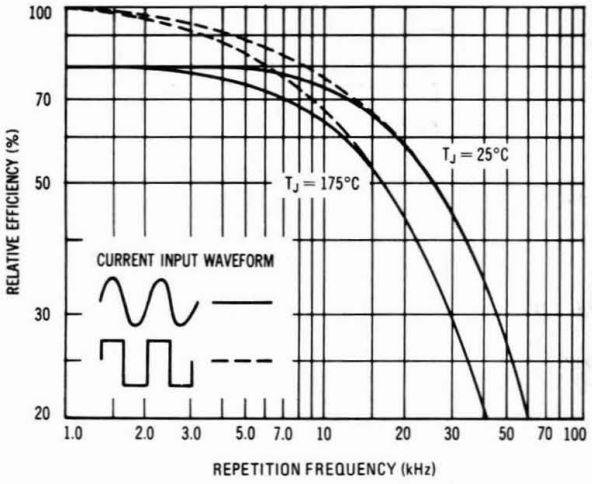

FIGURE 10 – REVERSE RECOVERY TIME

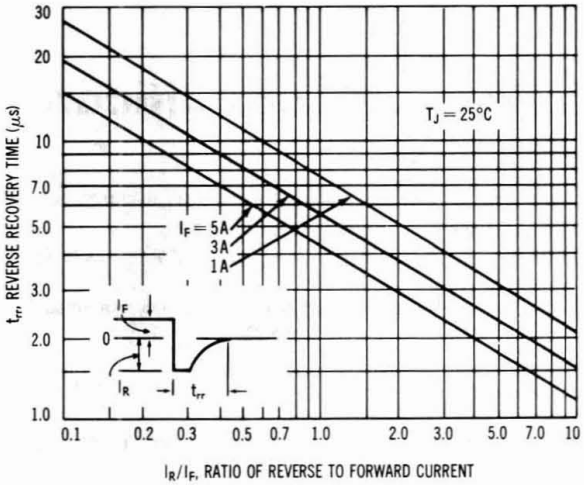

FIGURE 11 – JUNCTION CAPACITANCE

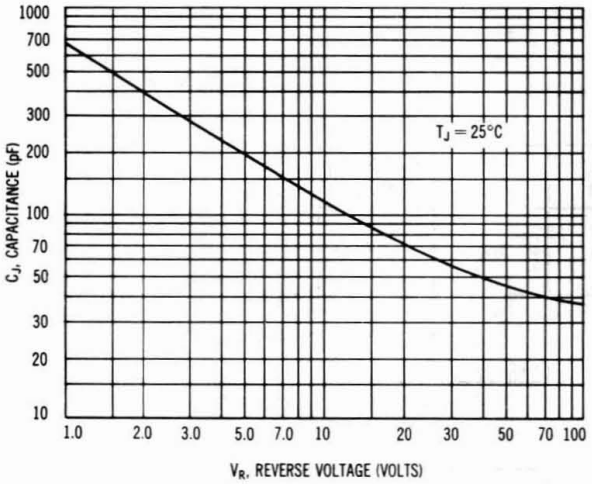

FIGURE 12 – FORWARD RECOVERY TIME

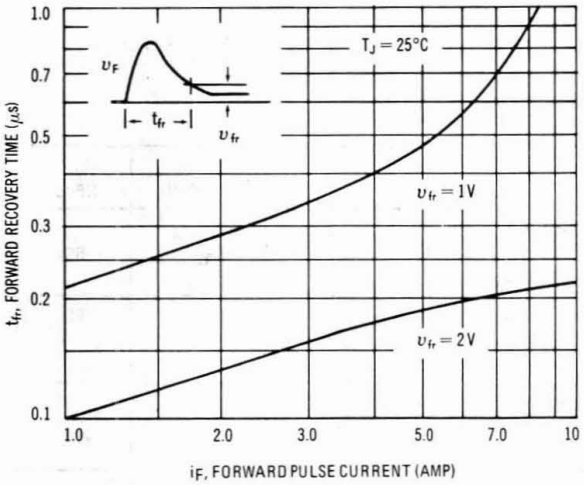

FIGURE 13 – SINGLE-PHASE HALF-WAVE RECTIFIER CIRCUIT

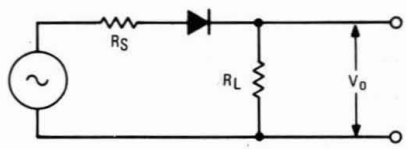

The rectification efficiency factor σ shown in Figure 9 was calculated using the formula:

$$\sigma = \frac{P_{(dc)}}{P_{(rms)}} = \frac{\frac{V^2_{o(dc)}}{R_L}}{\frac{V^2_{o(rms)}}{R_L}} \cdot 100\% = \frac{V^2_{o(dc)}}{V^2_{o(ac)} + V^2_{o(dc)}} \cdot 100\% \quad (1)$$

For a sine wave input $V_m \sin(\omega t)$ to the diode, assumed lossless, the maximum theoretical efficiency factor becomes:

$$\sigma_{(sine)} = \frac{\frac{V^2_m}{\pi^2 R_L}}{\frac{V^2_m}{4R_L}} \cdot 100\% = \frac{4}{\pi^2} \cdot 100\% = 40.6\% \quad (2)$$

For a square wave input of amplitude V_m, the efficiency factor becomes:

$$\sigma_{(square)} = \frac{\frac{V^2_m}{2R_L}}{\frac{V^2_m}{R_L}} \cdot 100\% = 50\% \quad (3)$$

(A full wave circuit has twice these efficiencies)

As the frequency of the input signal is increased, the reverse recovery time of the diode (Figure 10) becomes significant, resulting in an increasing ac voltage component across R_L which is opposite in polarity to the forward current, thereby reducing the value of the efficiency factor σ, as shown on Figure 9.

It should be emphasized that Figure 9 shows waveform efficiency only; it does not provide a measure of diode losses. Data was obtained by measuring the ac component of V_o with a true rms ac voltmeter and the dc component with a dc voltmeter. The data was used in Equation 1 to obtain points for Figure 9.

5

MR2500 Series

MR2504 and MR2510 are
Motorola Preferred Devices

Medium-Current Silicon Rectifiers

. . . compact, highly efficient silicon rectifiers for medium-current applications requiring:

- High Current Surge — 400 Amperes @ T_J = 175°C
- Peak Performance @ Elevated Temperature — 25 Amperes @ T_C = 150°C
- Low Cost
- Compact, Molded Package — For Optimum Efficiency in a Small Case Configuration
- Available With a Single Lead Attached, Consult Factory

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.8 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminals are Readily Solderable
- Lead Temperature for Soldering Purposes: requires a custom temperature soldering profile
- Polarity: cathode polarity band
- Shipped 5000 units per box
- Marking: R2500, R2501, R2502, R2504, R2506, R2510

MEDIUM-CURRENT SILICON RECTIFIERS
50 – 1000 VOLTS
25 AMPERES
DIFFUSED JUNCTION

CASE 193-04

5

MAXIMUM RATINGS

Characteristic	Symbol	MR 2500	MR 2501	MR 2502	MR 2504	MR 2506	MR 2510	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	200	400	600	1000	Volts
Non-Repetitive Peak Reverse Voltage (half wave, single phase, 60 Hz peak)	V_{RSM}	60	120	240	480	720	1200	Volts
Average Rectified Forward Current (Single phase, resistive load, 60 Hz, T_C = 150°C)	I_O	25						Amp
Non-Repetitive Peak Surge Current (surge applied @ rated load conditions, half wave, single phase, 60 Hz)	I_{FSM}	400 (for 1 cycle)						Amp
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−65 to +175						°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case (Single Side Cooled)	$R_{\theta JC}$	1.0	°C/W

ELECTRICAL CHARACTERISTICS

Characteristics and Conditions	Symbol	Max	Unit
Maximum Instantaneous Forward Voltage (i_F = 78.5 Amp, T_C = 25°C)	v_F	1.18	Volts
Maximum Reverse Current (rated dc voltage) T_C = 25°C T_C = 100°C	I_R	 100 500	µA

Rev 2

FIGURE 1 – FORWARD VOLTAGE

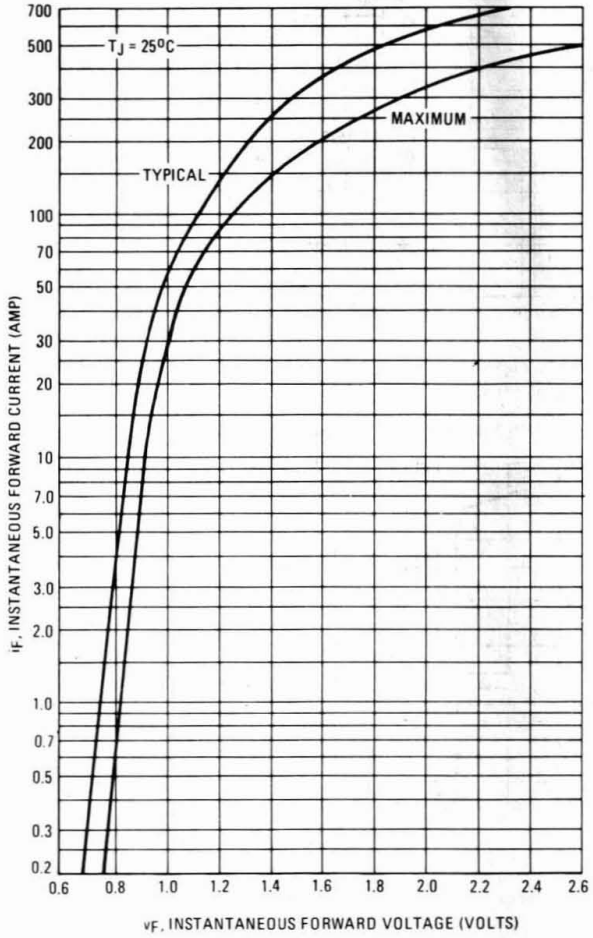

FIGURE 2 – NON-REPETITIVE SURGE CURRENT

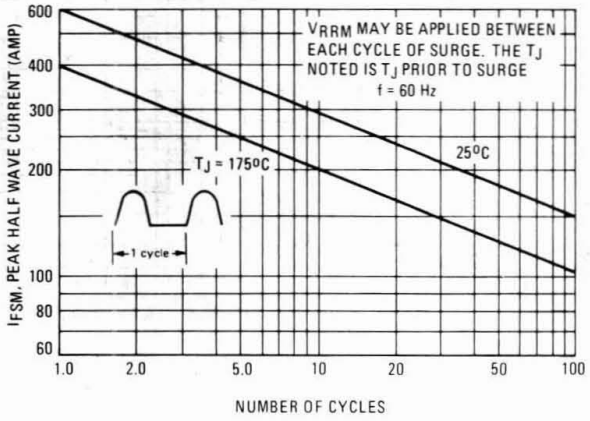

FIGURE 3 – FORWARD VOLTAGE TEMPERATURE COEFFICIENT

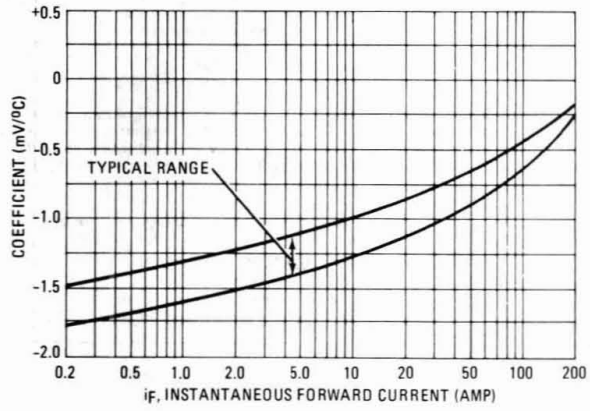

FIGURE 4 – CURRENT DERATING

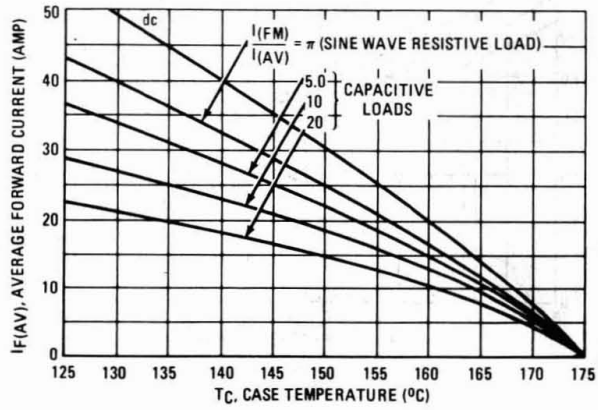

FIGURE 5 – FORWARD POWER DISSIPATION

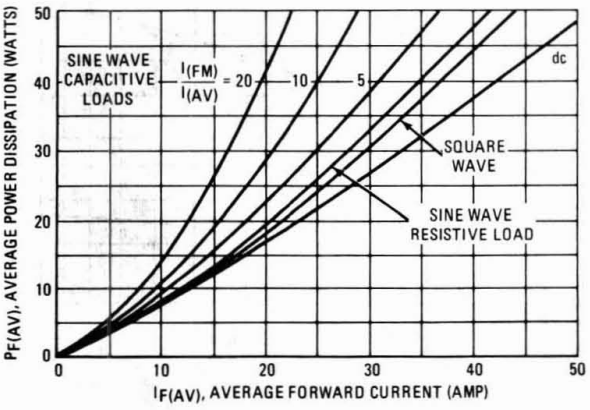

5

FIGURE 6 – THERMAL RESPONSE

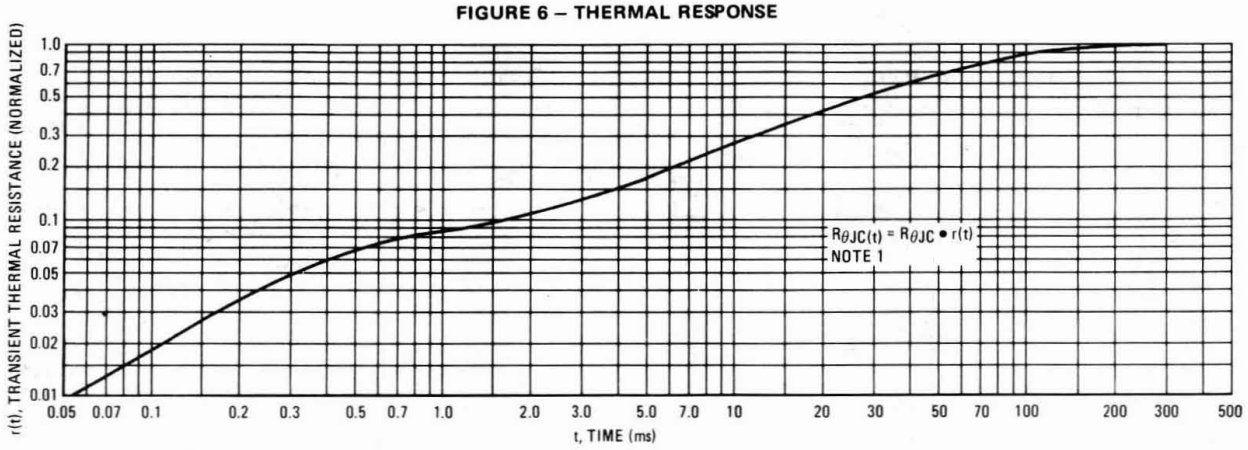

5



DUTY CYCLE, D = t_p/t_1
PEAK POWER, P_{pk}, is peak of an equivalent square power pulse.

To determine maximum junction temperature of the diode in a given situation, the following procedure is recommended.

The temperature of the case should be measured using a thermocouple placed on the case at the temperature reference point (see the outline drawing on page 1). The thermal mass connected to the case is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady state conditions are achieved. Using the measured value of T_C, the junction temperature may be determined by:

$$T_J = T_C + \Delta T_{JC}$$

where ΔT_{JC} is the increase in junction temperature above the case temperature. It may be determined by:

$$\Delta T_{JC} = P_{pk} \bullet R_{\theta JC} [D + (1 - D) \bullet r(t_1 + t_p) + r(t_p) - r(t_1)]$$

where

r(t) = normalized value of transient thermal resistance at time, t, from Figure 6, i.e.,

$r(t_1 + t_p)$ = normalized value of transient thermal resistance at time $t_1 + t_p$.

FIGURE 7 – CAPACITANCE

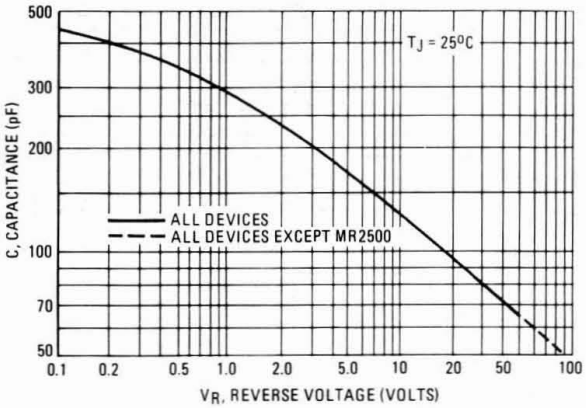

FIGURE 8 – FORWARD RECOVERY TIME

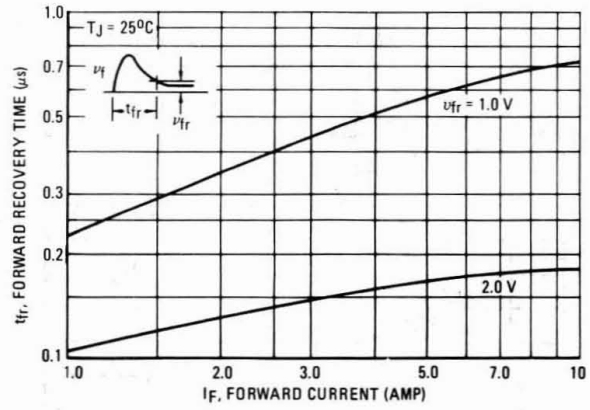

FIGURE 9 – REVERSE RECOVERY TIME

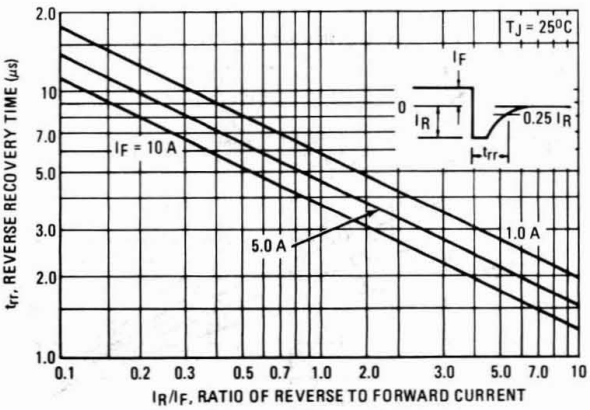

FIGURE 10 – RECTIFICATION WAVEFORM EFFICIENCY

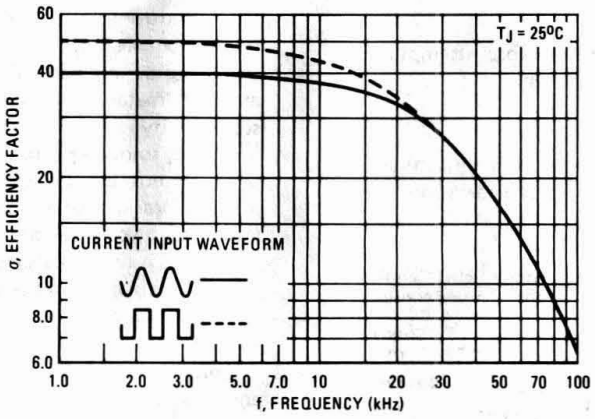

5

RECTIFICATION EFFICIENCY NOTE

FIGURE 11 – SINGLE-PHASE HALF-WAVE RECTIFIER CIRCUIT



The rectification efficiency factor σ shown in Figure 10 was calculated using the formula:

$$\sigma = \frac{P_{dc}}{P_{rms}} = \frac{\dfrac{V^2_{O(dc)}}{R_L}}{\dfrac{V^2_{O(rms)}}{R_L}} \bullet 100\% = \frac{V^2_{O(dc)}}{V^2_{O(ac)} + V^2_{O(dc)}} \bullet 100\% \quad (1)$$

For a sine wave input $V_m \sin(\omega t)$ to the diode, assume lossless, the maximum theoretical efficiency factor becomes:

$$\sigma(\text{sine}) = \frac{\dfrac{V^2_m}{\pi^2 R_L}}{\dfrac{V^2_m}{4R_L}} \bullet 100\% = \frac{4}{\pi^2} \bullet 100\% = 40.6\% \quad (2)$$

For a square wave input of amplitude V_m, the efficiency factor becomes:

$$\sigma(\text{square}) = \frac{\dfrac{V^2_m}{2R_L}}{\dfrac{V^2_m}{R_L}} \bullet 100\% = 50\% \quad (3)$$

(A full wave circuit has twice these efficiencies)

As the frequency of the input signal is increased, the reverse recovery time of the diode (Figure 9) becomes significant, resulting in an increasing ac voltage component across R_L which is opposite in polarity to the forward current, thereby reducing the value of the efficiency factor σ, as shown on Figure 10.

It should be emphasized that Figure 10 shows waveform efficiency only; it does not provide a measure of diode losses. Data was obtained by measuring the ac component of V_O with a true rms ac voltmeter and the dc component with a dc voltmeter. The data was used in Equation 1 to obtain points for Figure 10.

ASSEMBLY AND SOLDERING INFORMATION

There are *two basic areas* of consideration for successful implementation of button rectifiers:

1. Mounting and Handling
2. Soldering

each should be carefully examined before attempting a finished assembly or mounting operation.

MOUNTING AND HANDLING

The button rectifier lends itself to a multitude of assembly arrangements but one key consideration must *always* be included:

One Side of the Connections to the Button Must Be Flexible!

This stress relief to the button should also be chosen for maximum contact area to afford the best heat transfer – but not at the expense of flexibility. For an annealed copper terminal a thickness of 0.015" is suggested.

Strain Relief Terminal for Button Rectifier



The base heat sink may be of various materials whose shape and size are a function of the individual application and the heat transfer requirements.

Common Materials	Advantages and Disadvantages
Steel	Low Cost; relatively low heat conductivity
Copper	High Cost; high heat conductivity
Aluminum	Medium Cost; medium heat conductivity Relatively expensive to plate and not all platers can process aluminum.

Handling of the button during assembly must be relatively gentle to minimize sharp impact shocks and avoid nicking of the plastic. Improperly designed automatic handling equipment is the worst source of unnecessary shocks. Techniques for vacuum handling and spring loading should be investigated.

The mechanical stress limits for the button diode are as follows:

Compression	32 lbs.	142.3 Newton
Tension	32 lbs.	142.3 Newton
Torsion	6-inch lbs.	0.68 Newton-meters
Shear	55 lbs.	244.7 Newton

MECHANICAL STRESS

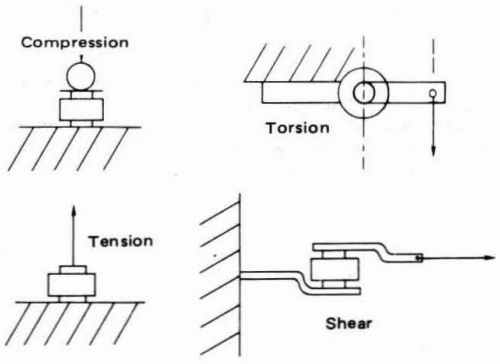

Exceeding these recommended maximums can result in electrical degradation of the device.

SOLDERING

The button rectifier is basically a semiconductor chip bonded between two nickel-plated copper heat sinks with an encapsulating material of thermal-setting silicone. The exposed metal areas are also tin plated to enhance solderability.

In the soldering process it is important that the temperature not exceed 250°C if device damage is to be avoided. Various solder alloys can be used for this operation but two types are recommended for best results:

1. 96.5% tin, 3.5% silver; Melting point is 221°C (this particular eutetic is used by Motorola for its button rectifier assemblies).
2. 63% tin, 37% lead; Melting point 183°C (eutetic).

Solder is available as preforms or paste. The paste contains both the metal and flux and can be dispensed rapidly. The solder preform requires the application of a flux to assure good wetting of the solder. The type of flux used depends upon the degree of cleaning to be accomplished and is a function of the metals involved. These fluxes range from a mild rosin to a strong acid; e.g., Nickel plating oxides are best removed by an acid base flux while an activated rosin flux may be sufficient for tin plated parts.

Since the button is relatively light-weight, there is a tendency for it to float when the solder becomes liquid. To prevent bad joints and misalignment it is suggested that a weighting or spring loaded fixture be employed. It is also important that severe thermal shock (either heating or cooling) be avoided as it may lead to damage of the die or encapsulant of the part.

Button holding fixtures for use during soldering may be of various materials. Stainless steel has a longer use life while black anodized aluminum is less expensive and will limit heat reflection and enhance absorption. The assembly volume will influence the choice of materials. Fixture dimension tolerances for locating the button must allow for expansion during soldering as well as allowing for button clearance.

HEATING TECHNIQUES

The following four heating methods have their advantages and disadvantages depending on volume of buttons to be soldered.

1. **Belt Furnaces** readily handle large or small volumes and are adaptable to establishment of "on-line" assembly since a variable belt speed sets the run rate. Individual furnace zone controls make excellent temperature control possible.

2. **Flame Soldering** involves the directing of natural gas flame jets at the base of a heatsink as the heatsink is indexed to various loading-heating-cooling-unloading positions. This is the most economical labor method of soldering large volumes. Flame soldering offers good temperature control but requires sophisticated temperature monitoring systems such as infrared.

ASSEMBLY AND SOLDERING INFORMATION (continued)

3. **Ovens** are good for batch soldering and are production limited. There are handling problems because of slow cooling. Response time is load dependent, being a function of the watt rating of the oven and the mass of parts. Large ovens may not give an acceptable temperature gradient. Capital cost is low compared to belt furnaces and flame soldering.
4. **Hot Plates** are good for soldering small quantities of prototype devices. Temperature control is fair with overshoot common because of the exposed heating surface. Solder flow and positioning can be corrected during soldering since the assembly is exposed. Investment cost is very low.

Regardless of the heating method used, a soldering profile giving the time-temperature relationship of the particular method must be determined to assure proper soldering. Profiling must be performed on a scheduled basis to minimize poor soldering. The time-temperature relationship will change depending on the heating method used.

SOLDER PROCESS EVALUATION

Characteristics to look for when setting up the soldering process:

I **Overtemperature** is indicated by any one or all three of the following observations.
1. Remelting of the solder inside the button rectifier shows the temperature has exceeded 285°C and is noted by "islands" of shiny solder and solder dewetting when a unit is broken apart.
2. Cracked die inside the button may be observed by a moving reverse oscilloscope trace when pressure is applied to the unit.
3. Cracked plastic may be caused by thermal shock as well as overtemperature so cooling rate should also be checked.

II **Cold soldering** gives a grainy appearance and solder build-up without a smooth continuous solder fillet. The temperature must be adjusted until the proper solder fillet is obtained within the maximum temperature limits.

III **Incomplete solder fillets** result from insufficient solder or parts not making proper contact.

IV **Tilted buttons** can cause a void in the solder between the heatsink and button rectifier which will result in poor heat transfer during operation. An eight degree tilt is a suggested maximum value.

V **Plating problems** require a knowledge of plating operations for complete understanding of observed deficiencies.
1. Peeling or plating separation is generally seen when a button is broken away for solder inspection. If heatsink or terminal base metal is present the plating is poor and must be corrected.
2. Thin plating allows the solder to penetrate through to the base metal and can give a poor connection. A suggested minimum plating thickness is 300 microinches.
3. Contaminated soldering surfaces may out-gas and cause non-wetting resulting in voids in the solder connection. The exact cause is not always readily apparent and can be because of:
   (a) improper plating
   (b) mishandling of parts
   (c) improper and/or excessive storage time

SOLDER PROCESS MONITORING

Continuous monitoring of the soldering process must be established to minimize potential problems. All parts used in the soldering operation should be sampled on a lot by lot basis by assembly of a controlled sample. Evaluate the control sample by break-apart tests to view the solder connections, by physical strength tests and by dimensional characteristics for part mating.

A shear test is a suggested way of testing the solder bond strength.

POST SOLDERING OPERATION CONSIDERATIONS

After soldering, the completed assembly must be unloaded, washed and inspected.

Unloading must be done carefully to avoid unnecessary stress. Assembly fixtures should be cooled to room temperature so solder profiles are not affected.

Washing is mandatory if an acid flux is used because of its ionic and corrosive nature. Wash the assemblies in agitated hot water and detergent for three to five minutes. After washing; rinse, blow off excessive water and bake 30 minutes at 150°C to remove trapped moisture.

Inspection should be both electrical and physical. Any rejects can be reworked as required.

SUMMARY

The Button Rectifier is an excellent building block for specialized applications. The prime example of its use is the output bridge of the automative alternator where millions are used each year. Although the material presented here is not all inclusive, primary considerations for use are presented. For further information, contact the nearest Motorola Sales Office or franchised distributor.

Complementary Medium Current Silicon Rectifiers

For Linear Power Supply Applications

MR4422CT
MR4422CTR

POWER RECTIFIERS
30 AMPERES
100 VOLTS

. . . using monolithic silicon technology for perfect matching of diodes in center tap configuration. These devices have the following features:

- Low Forward Voltage Drop
- Soft Reverse Recovery for Low Noise
- High Surge Current Capability
- 150°C Operating Junction Temperature
- Direct Replacement for Varo R711 and R711A

Mechanical Characteristics

- Case: Welded Steel can, hermetically sealed
- Weight: 11 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 100 units per foam tray
- Marking: R4422T, R4422R



MR4422CT



MR4422CTR



CASE 1–07
(TO–204AA)

5

MAXIMUM RATINGS (PER LEG)

Rating	Symbol	Max	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	100	Volts
Average Rectified Forward Current (Rated V_R) T_C = 125°C Per Leg Per Device	$I_{F(AV)}$	15 30	Amps
Peak Repetitive Forward Current, Per Diode Leg (Rated V_R, Square Wave, 20 kHz) T_C = 125°C	I_{FRM}	30	Amps
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	400	Amps
Peak Repetitive Reverse Surge Current (2.0 µs, 1.0 kHz)	I_{RRM}	2.0	Amps
Operating Junction Temperature	T_J	–65 to +150	°C
Storage Temperature	T_{stg}	–65 to +175	°C

THERMAL CHARACTERISTICS (PER LEG)

Thermal Resistance — Junction to Case	$R_{\theta JC}$	1.4	°C/W

ELECTRICAL CHARACTERISTICS (PER LEG)

Maximum Instantaneous Forward Voltage (1) (I_F = 15 Amps, T_C = 25°C) (I_F = 10 Amps, T_C = 125°C)	i_F	 1.2 1.1	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, T_C = 25°C) (Rated dc Voltage, T_C = 125°C)	i_R	 1.0 250	mA

(1) Pulse Test: Pulse Width = 300 µs, Duty Cycle ≤ 2.0%.

Rev 1

Advance Information

Overvoltage Transient Suppressors

MR2535L
MR2535S

MEDIUM CURRENT OVERVOLTAGE TRANSIENT SUPPRESSORS

. . . designed for applications requiring a low voltage rectifier with reverse avalanche characteristics for use as reverse power transient suppressors. Developed to suppress transients in the automotive system, these devices operate in the forward mode as standard rectifiers or reverse mode as power avalanche rectifier and will protect electronic equipment from overvoltage conditions.

- Avalanche Voltage 24 to 32 Volts
- High Power Capability
- Economical
- Increased Capacity by Parallel Operation

Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 2.5 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Polarity: cathode polarity band
- MR2535L shipped 1000 units per plastic bag. Available Tape and Reeled, 800 units per reel by adding a "RL" suffix to the part number.
- MR2535S shipped pocket tape and reeled, 500 per 13″ reel.
- Marking: MR2535L, MR2535S

CASE 194–04

CASE 421A–01

5

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
DC Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	20	Volts
Repetitive Peak Reverse Surge Current (Time Constant = 10 ms, Duty Cycle ≤ 1%, T_C = 25°C) (See Figure 1)	I_{RSM}	110	Amps
Average Rectified Forward Current (Single Phase, Resistive Load, 60 Hz, T_C = 150°C)	I_O	35	Amps
Non–Repetitive Peak Surge Current Surge Supplied at Rated Load Conditions Halfwave, Single Phase	I_{FSM}	600	Amps
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–65 to +175	°C

THERMAL CHARACTERISTICS

Characteristic	Lead Length	Symbol	Max	Unit
Thermal Resistance, Junction to Lead @ Both Leads to Heat Sink, Equal Length	1/4″ 3/8″ 1/2″	$R_{\theta JL}$	7.5 10 13	°C/W
Thermal Resistance Junction to Case		$R_{\theta JC}$	0.8*	°C/W

*Typical

This document contains information on a new product. Specifications and information herein are subject to change without notice.

Rev 2

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min	Max	Unit
Instantaneous Forward Voltage (1) (i_F = 100 Amps, T_C = 25°C)	v_F	—	1.1	Volts
Reverse Current (V_R = 20 Vdc, T_C = 25°C)	I_R	—	200	nAdc
Breakdown Voltage (1) (I_R = 100 mAdc, T_C = 25°C)	$V_{(BR)}$	24	32	Volts
Breakdown Voltage (1) (I_R = 90 Amp, T_C = 150°C, PW = 80 μs)	$V_{(BR)}$	—	40	Volts
Breakdown Voltage Temperature Coefficient	$V_{(BR)TC}$	—	0.096*	%/°C
Forward Voltage Temperature Coefficient @ I_F = 10 mA	V_{FTC}	—	2*	mV/°C

(1) Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.
*Typical

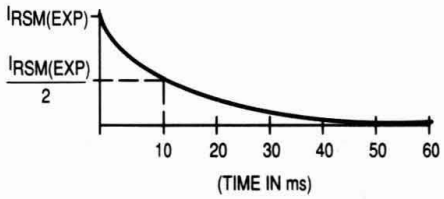

Figure 1. Surge Current Characteristics

5

Section 6

Tape and Reel/ Packaging Specifications

Tape and Reel Specifications and Packaging Specifications

Embossed Tape and Reel is used to facilitate automatic pick and place equipment feed requirements. The tape is used as the shipping container for various products and requires a minimum of handling. The antistatic/conductive tape provides a secure cavity for the product when sealed with the "peel–back" cover tape.

- Two Reel Sizes Available (7″ and 13″)
- Used for Automatic Pick and Place Feed Systems
- Minimizes Product Handling
- EIA 481, –1, –2
- SOD–123, SC–59, SC–70/SOT–323, SOT–23, SOT–143 in 8 mm Tape
- SO–8, OPTO SO–8, SOT–223, SMB in 12 mm Tape
- DPAK, SO–14, SO–16, SMC in 16 mm Tape
- D^2PAK, 6–Pin Optoisolators in 24 mm Tape

Use the standard device title and add the required suffix as listed in the option table on the following page. Note that the individual reels have a finite number of devices depending on the type of product contained in the tape. Also note the minimum lot size is one full reel for each line item, and orders are required to be in increments of the single reel quantity.

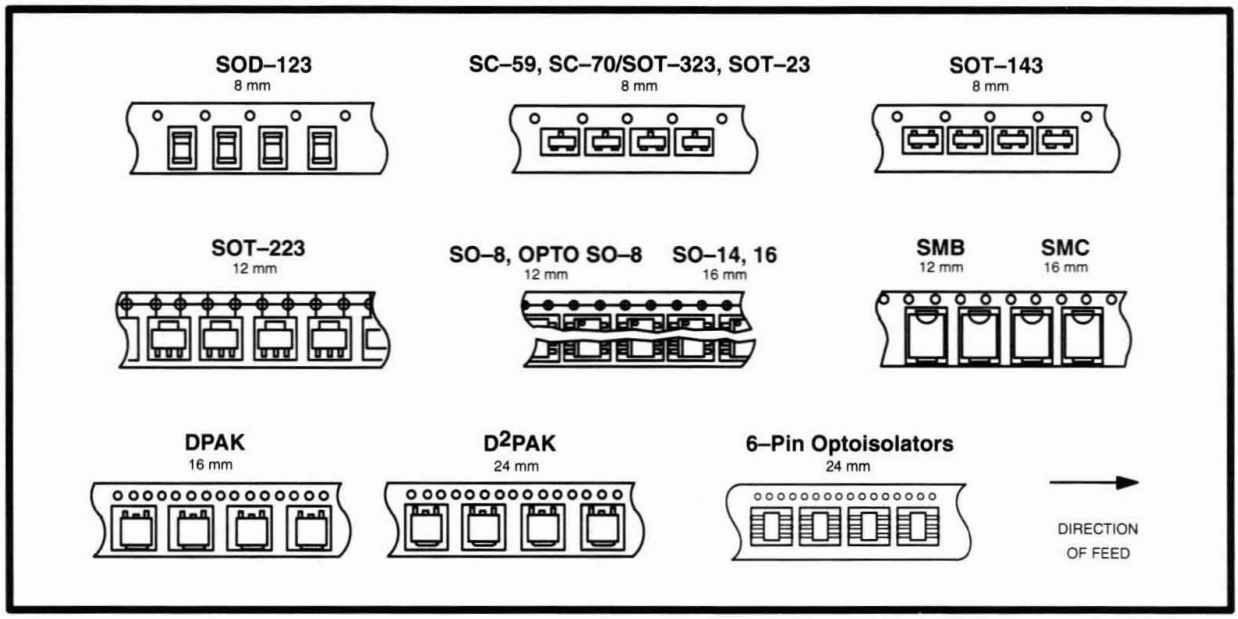

6

EMBOSSED TAPE AND REEL ORDERING INFORMATION

Package	Tape Width (mm)	Pitch mm (inch)	Reel Size mm (inch)	Devices Per Reel and Minimum Order Quantity	Device Suffix
DPAK	16	8.0 ± 0.1 (.315 ± .004)	330 (13)	2,500	T4
D^2PAK	24	16.0 ± 0.1 (.630 ± .004)	330 (13)	800	T4
SC–59	8	4.0 ± 0.1 (.157 ± .004)	178 (7)	3,000	T1
SC–70/SOT–323	8 8	4.0 ± 0.1 (.157 ± .004)	178 (7) 330 (13)	3,000 10,000	T1 T3
SMB	12	8.0 ± 0.1 (.315 ± .004)	330 (13)	2,500	T3
SMC	16	8.0 ± 0.1 (.315 ± .004)	330 (13)	2,500	T3
SO–8, OPTO SO–8	12 12	8.0 ± 0.1 (.315 ± .004)	178 (7) 330 (13)	500 2,500	R1 R2
SO–14	16 16	8.0 ± 0.1 (.315 ± .004)	178 (7) 330 (13)	500 2,500	R1 R2
SO–16	16 16	8.0 ± 0.1 (.315 ± .004)	178 (7) 330 (13)	500 2,500	R1 R2
SOD–123	8 8	4.0 ± 0.1 (.157 ± .004)	178 (7) 330 (13)	3,000 10,000	T1 T3
SOT–23	8 8	4.0 ± 0.1 (.157 ± .004)	178 (7) 330 (13)	3,000 10,000	T1 T3
SOT–143	8 8	4.0 ± 0.1 (.157 ± .004)	178 (7) 330 (13)	3,000 10,000	T1 T3
SOT–223	12 12	8.0 ± 0.1 (.315 ± .004)	178 (7) 330 (13)	1,000 4,000	T1 T3
6–Pin Optoisolators	24	12.0 ± 0.1 (.472 ± .004)	330 (13)	1000	R2

EMBOSSED TAPE AND REEL DATA FOR DISCRETES

CARRIER TAPE SPECIFICATIONS

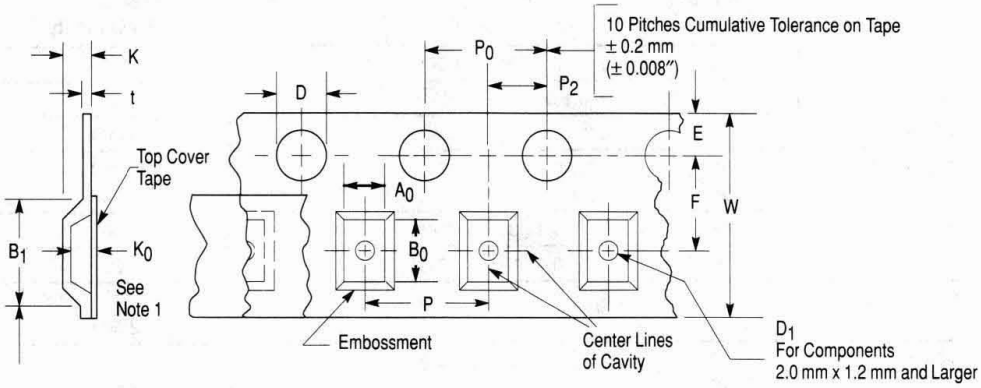

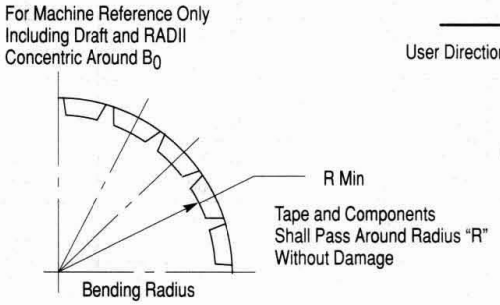

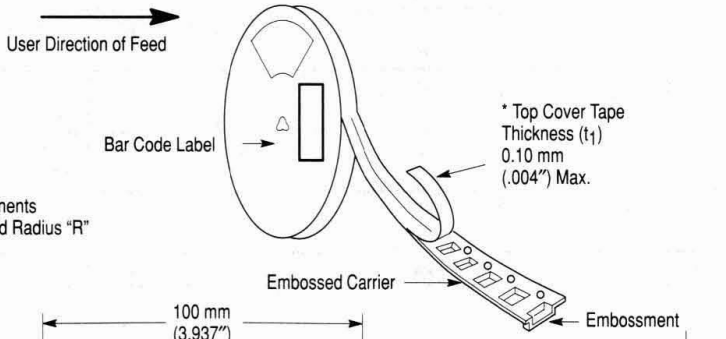



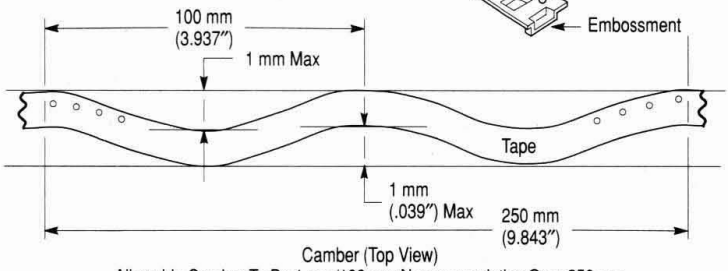

6

DIMENSIONS

Tape Size	B_1 Max	D	D_1	E	F	K	P_0	P_2	R Min	T Max	W Max
8 mm	4.55 mm (.179″)	1.5 + 0.1 mm −0.0 (.059 + .004″ −0.0)	1.0 Min (.039″)	1.75 ± 0.1 mm (.069 ± .004″)	3.5 ± 0.05 mm (.138 ± .002″)	2.4 mm Max (.094″)	4.0 ± 0.1 mm (.157 ± .004″)	2.0 ± 0.1 mm (.079 ± .002″)	25 mm (.98″)	0.6 mm (.024″)	8.3 mm (.327″)
12 mm	8.2 mm (.323″)		1.5 mm Min (.060″)		5.5 ± 0.05 mm (.217 ± .002″)	6.4 mm Max (.252″)			30 mm (1.18″)		12 ± .30 mm (.470 ± .012″)
16 mm	12.1 mm (.476″)				7.5 ± 0.10 mm (.295 ± .004″)	7.9 mm Max (.311″)					16.3 mm (.642″)
24 mm	20.1 mm (.791″)				11.5 ± 0.1 mm (.453 ± .004″)	11.9 mm Max (.468″)					24.3 mm (.957″)

Metric dimensions govern — English are in parentheses for reference only.

NOTE 1: A_0, B_0, and K_0 are determined by component size. The clearance between the components and the cavity must be within .05 mm min. to .50 mm max., the component cannot rotate more than 10° within the determined cavity.

NOTE 2: If B_1 exceeds 4.2 mm (.165) for 8 mm embossed tape, the tape may not feed through all tape feeders.

NOTE 3: Pitch information is contained in the Embossed Tape and Reel Ordering Information on pg. 6–3.

EMBOSSED TAPE AND REEL DATA FOR DISCRETES

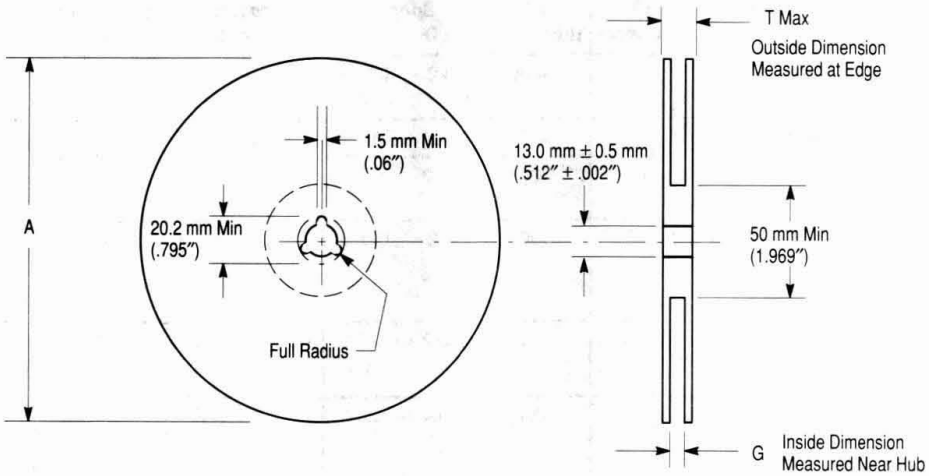

Size	A Max	G	T Max
8 mm	330 mm (12.992″)	8.4 mm + 1.5 mm, −0.0 (.33″ + .059″, −0.00)	14.4 mm (.56″)
12 mm	330 mm (12.992″)	12.4 mm + 2.0 mm, −0.0 (.49″ + .079″, −0.00)	18.4 mm (.72″)
16 mm	360 mm (14.173″)	16.4 mm + 2.0 mm, −0.0 (.646″ + .078″, −0.00)	22.4 mm (.882″)
24 mm	360 mm (14.173″)	24.4 mm + 2.0 mm, −0.0 (.961″ + .070″, −0.00)	30.4 mm (1.197″)

Reel Dimensions

Metric Dimensions Govern — English are in parentheses for reference only

LEAD TAPE PACKAGING STANDARDS FOR AXIAL–LEAD COMPONENTS

Case Type	Product Category	Device Title Suffix	MPQ Quantity Per Reel (Item 3.3.7)	Component Spacing A Dimension	Tape Spacing B Dimension	Reel Dimension C	Reel Dimension D (Max)	Max Off Alignment E
Case 17–02	Surmetic 40 & 600 Watt TVS	RL	4000	0.2 +/– 0.015	2.062 +/– 0.059	3	14	0.047
Case 41A–02	1500 Watt TVS	RL4	1500	0.4 +/– 0.02	2.062 +/– 0.059	3	14	0.047
Case 51–02	DO–7 Glass (For Reference only)	RL	3000	0.2 +/– 0.02	2.062 +/– 0.059	3	14	0.047
Case 59–03	DO–41 Glass & DO–41 Surmetic 30	RL	6000	0.2 +/– 0.015	2.062 +/– 0.059	3	14	0.047
	Rectifier							
Case 59–04	500 Watt TVS	RL	5000	0.2 +/– 0.02	2.062 +/– 0.059	3	14	0.047
	Rectifier							
Case 194–04	110 Amp TVS (Automotive)	RL	800	0.4 +/– 0.02	1.875 +/– 0.059	3	14	0.047
	Rectifier							
Case 267–02	Rectifier	RL	1500	0.4 +/– 0.02	2.062 +/– 0.059	3	14	0.047
Case 299–02	DO–35 Glass	RL	5000	0.2 +/– 0.02	2.062 +/– 0.059	3	14	0.047

Table 1. Packaging Details (all dimensions in inches)

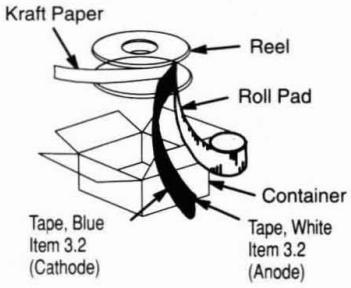

Figure 1. Reel Packing

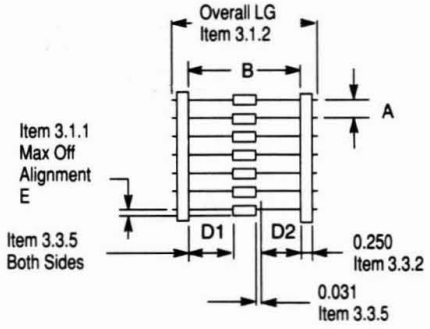

Figure 2. Component Spacing

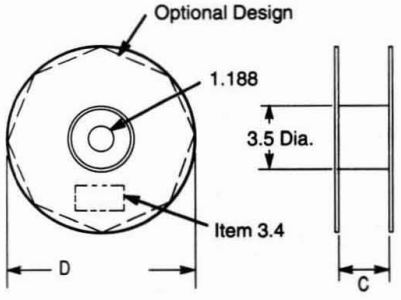

Figure 3. Reel Dimensions

Section 7

Surface Mount Information

INFORMATION FOR USING SURFACE MOUNT PACKAGES

RECOMMENDED FOOTPRINTS FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to ensure proper solder connection interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.

POWER DISSIPATION FOR A SURFACE MOUNT DEVICE

The power dissipation for a surface mount device is a function of the drain/collector pad size. These can vary from the minimum pad size for soldering to a pad size given for maximum power dissipation. Power dissipation for a surface mount device is determined by $T_{J(max)}$, the maximum rated junction temperature of the die, $R_{\theta JA}$, the thermal resistance from the device junction to ambient, and the operating temperature, T_A. Using the values provided on the data sheet, P_D can be calculated as follows:

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

The values for the equation are found in the maximum ratings table on the data sheet. Substituting these values into the equation for an ambient temperature T_A of 25°C, one can calculate the power dissipation of the device. For example, for a SOT–223 device, P_D is calculated as follows.

$$P_D = \frac{150°C - 25°C}{156°C/W} = 800 \text{ milliwatts}$$

The 156°C/W for the SOT–223 package assumes the use of the recommended footprint on a glass epoxy printed circuit board to achieve a power dissipation of 800 milliwatts. There are other alternatives to achieving higher power dissipation from the surface mount packages. One is to increase the area of the drain/collector pad. By increasing the area of the drain/collector pad, the power dissipation can be increased. Although the power dissipation can almost be doubled with this method, area is taken up on the printed circuit board which can defeat the purpose of using surface mount technology. For example, a graph of $R_{\theta JA}$ versus drain pad area is shown in Figures 1, 2 and 3.

Another alternative would be to use a ceramic substrate or an aluminum core board such as Thermal Clad™. Using a board material such as Thermal Clad, an aluminum core board, the power dissipation can be doubled using the same footprint.

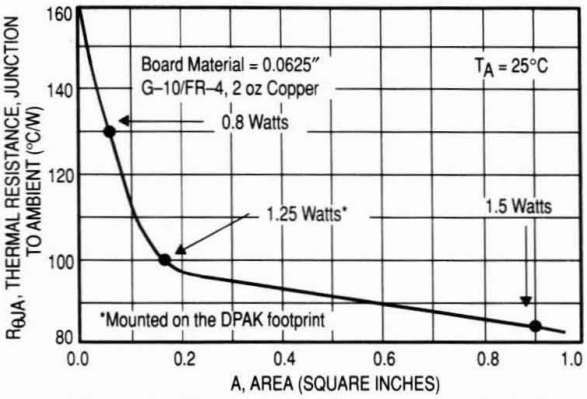

Figure 1. Thermal Resistance versus Drain Pad Area for the SOT–223 Package (Typical)

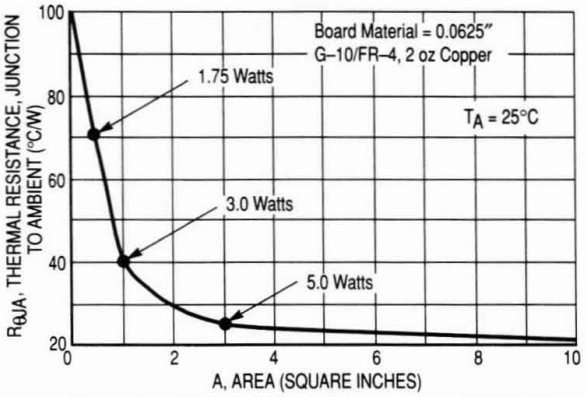

Figure 2. Thermal Resistance versus Drain Pad Area for the DPAK Package (Typical)

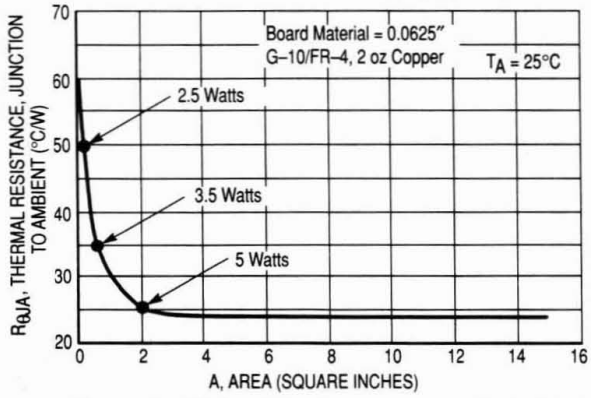

Figure 3. Thermal Resistance versus Drain Pad Area for the D²PAK Package (Typical)

7

SOLDER STENCIL GUIDELINES

Prior to placing surface mount components onto a printed circuit board, solder paste must be applied to the pads. Solder stencils are used to screen the optimum amount. These stencils are typically 0.008 inches thick and may be made of brass or stainless steel. For packages such as the SC–59, SC–70/SOT–323, SOD–123, SOT–23, SOT–143, SOT–223, SO–8, SO–14, SO–16, and SMB/SMC diode packages, the stencil opening should be the same as the pad size or a 1:1 registration. This is not the case with the DPAK and D^2PAK packages. If a 1:1 opening is used to screen solder onto the drain pad, misalignment and/or "tombstoning" may occur due to an excess of solder. For these two packages, the opening in the stencil for the paste should be approximately 50% of the tab area. The opening for the leads is still a 1:1 registration. Figure 4 shows a typical stencil for the DPAK and D^2PAK packages. The pattern of the opening in the stencil for the drain pad is not critical as long as it allows approximately 50% of the pad to be covered with paste.

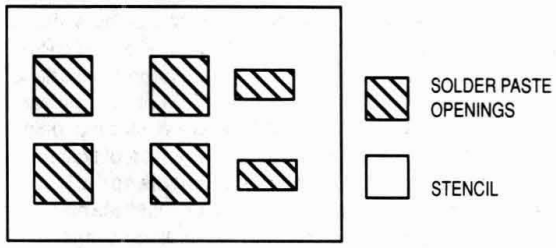

Figure 4. Typical Stencil for DPAK and D^2PAK Packages

SOLDERING PRECAUTIONS

The melting temperature of solder is higher than the rated temperature of the device. When the entire device is heated to a high temperature, failure to complete soldering within a short time could result in device failure. Therefore, the following items should always be observed in order to minimize the thermal stress to which the devices are subjected.

- Always preheat the device.
- The delta temperature between the preheat and soldering should be 100°C or less.*
- When preheating and soldering, the temperature of the leads and the case must not exceed the maximum temperature ratings as shown on the data sheet. When using infrared heating with the reflow soldering method, the difference should be a maximum of 10°C.
- The soldering temperature and time should not exceed 260°C for more than 10 seconds.
- When shifting from preheating to soldering, the maximum temperature gradient shall be 5°C or less.
- After soldering has been completed, the device should be allowed to cool naturally for at least three minutes. Gradual cooling should be used since the use of forced cooling will increase the temperature gradient and will result in latent failure due to mechanical stress.
- Mechanical stress or shock should not be applied during cooling.

* Soldering a device without preheating can cause excessive thermal shock and stress which can result in damage to the device.

* Due to shadowing and the inability to set the wave height to incorporate other surface mount components, the D^2PAK is not recommended for wave soldering.

7

TYPICAL SOLDER HEATING PROFILE

For any given circuit board, there will be a group of control settings that will give the desired heat pattern. The operator must set temperatures for several heating zones and a figure for belt speed. Taken together, these control settings make up a heating "profile" for that particular circuit board. On machines controlled by a computer, the computer remembers these profiles from one operating session to the next. Figure 5 shows a typical heating profile for use when soldering a surface mount device to a printed circuit board. This profile will vary among soldering systems, but it is a good starting point. Factors that can affect the profile include the type of soldering system in use, density and types of components on the board, type of solder used, and the type of board or substrate material being used. This profile shows temperature versus time. The line on the graph shows the actual temperature that might be experienced on the surface of a test board at or near a central solder joint. The two profiles are based on a high density and a low density board. The Vitronics SMD310 convection/infrared reflow soldering system was used to generate this profile. The type of solder used was 62/36/2 Tin Lead Silver with a melting point between 177–189°C. When this type of furnace is used for solder reflow work, the circuit boards and solder joints tend to heat first. The components on the board are then heated by conduction. The circuit board, because it has a large surface area, absorbs the thermal energy more efficiently, then distributes this energy to the components. Because of this effect, the main body of a component may be up to 30 degrees cooler than the adjacent solder joints.

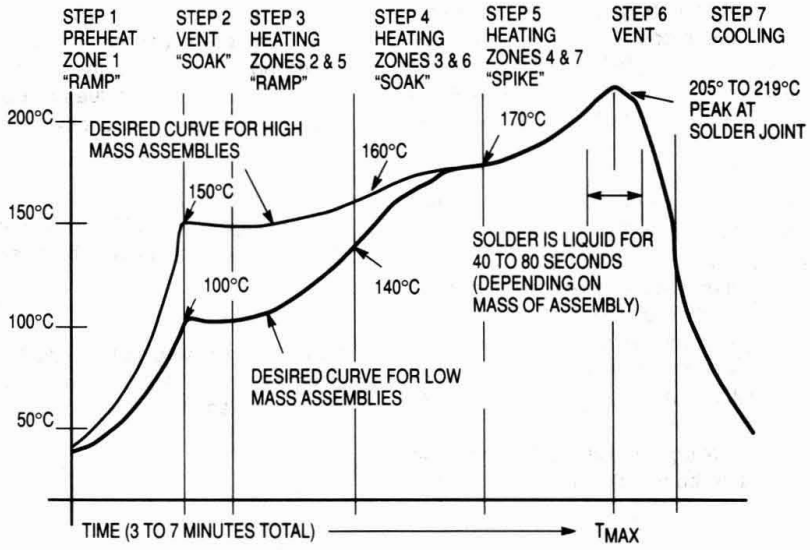

Figure 5. Typical Solder Heating Profile

7

Footprints for Soldering

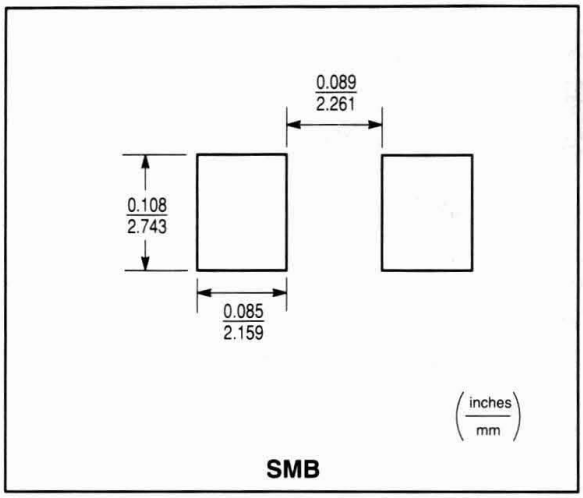

SMB

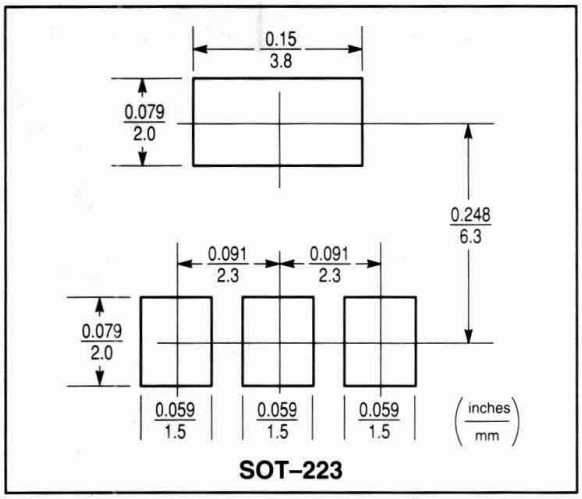

SOT–223

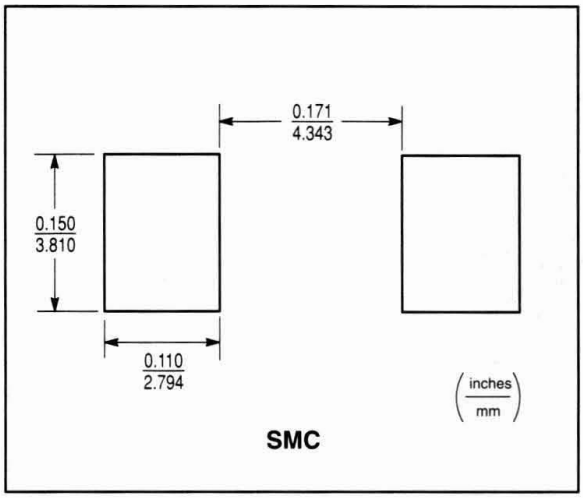

SMC

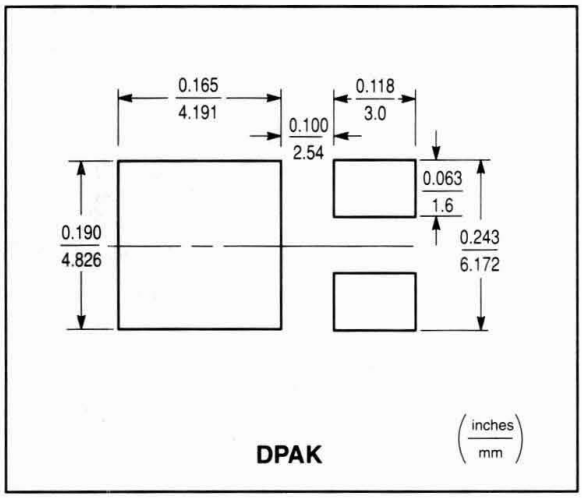

DPAK

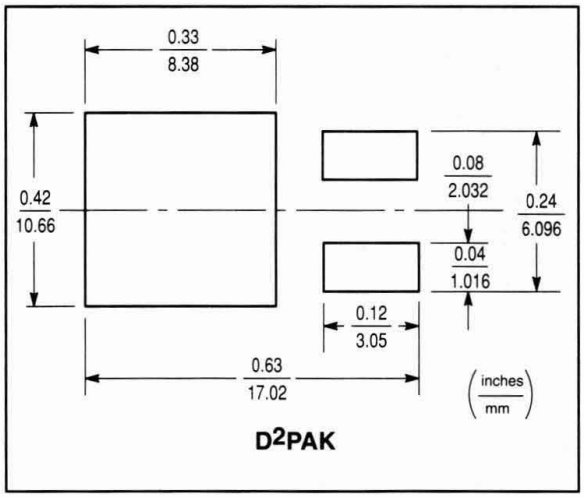

D²PAK

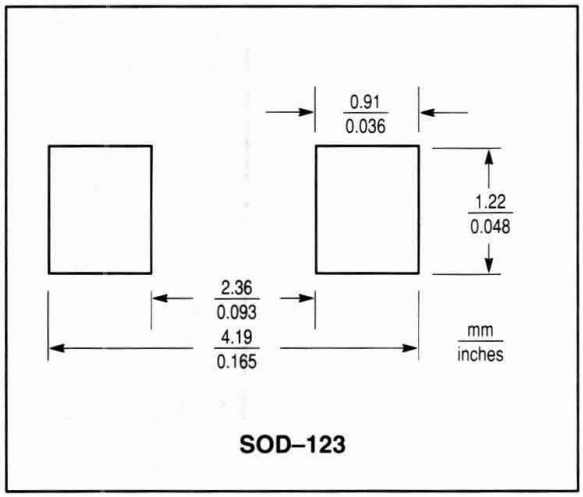

SOD–123

7

Section 8

TO–220 Leadform Information

Leadform Options — TO–220 (Case 221A)

- **Leadform options require assignment of a special part number before ordering.**
- **Contact your local Motorola representative for special part number and pricing.**
- **10,000 piece minimum quantity orders are required.**
- **Leadform orders are non–cancellable after processing.**
- **Leadforms apply to both Motorola Case 221A–04 and 221A–06 except as noted.**

LEADFORM AS

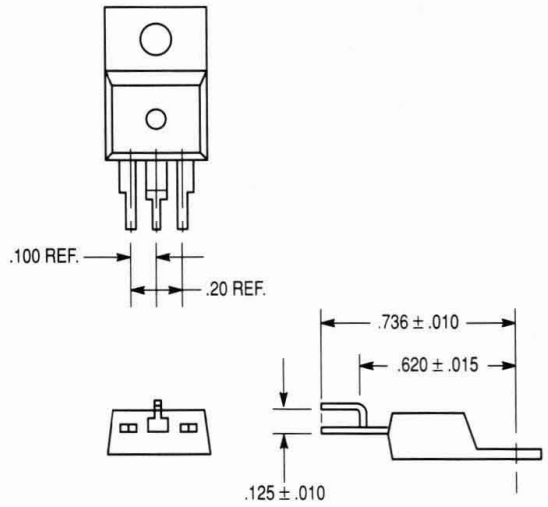

LEADFORM BC

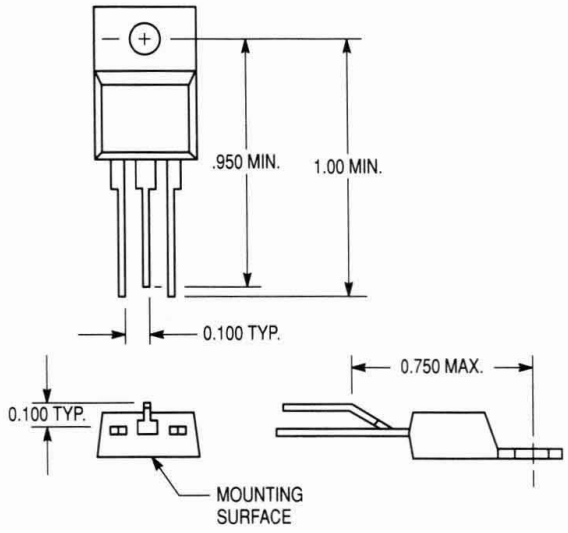

LEADFORM AC

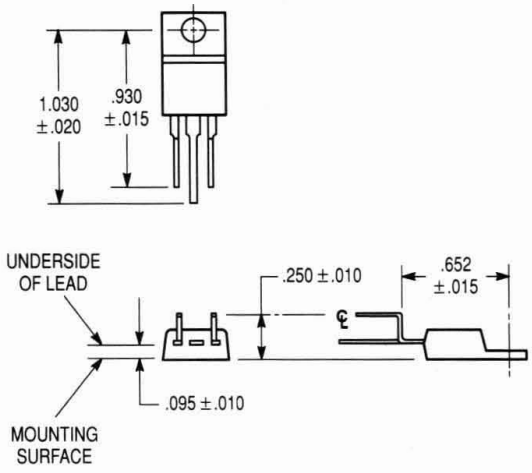

LEADFORM AD

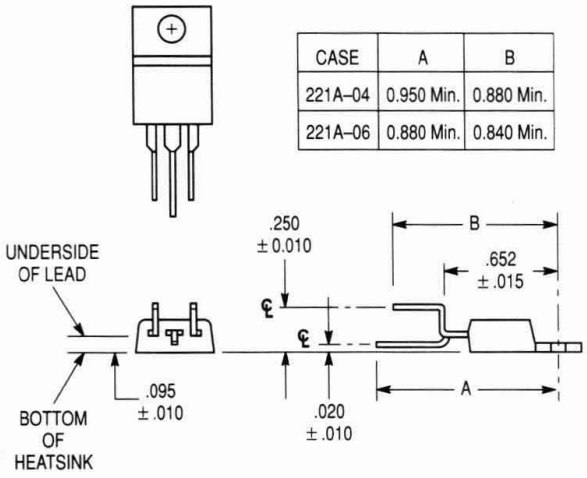

CASE	A	B
221A–04	0.950 Min.	0.880 Min.
221A–06	0.880 Min.	0.840 Min.

8

TO–220 Leadform Options (continued)

LEADFORM AN

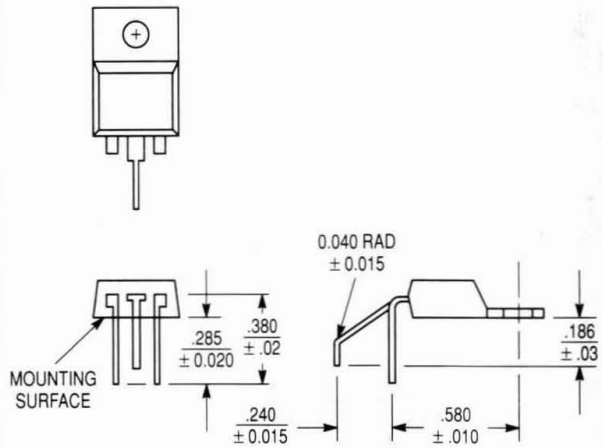

LEADFORM BA

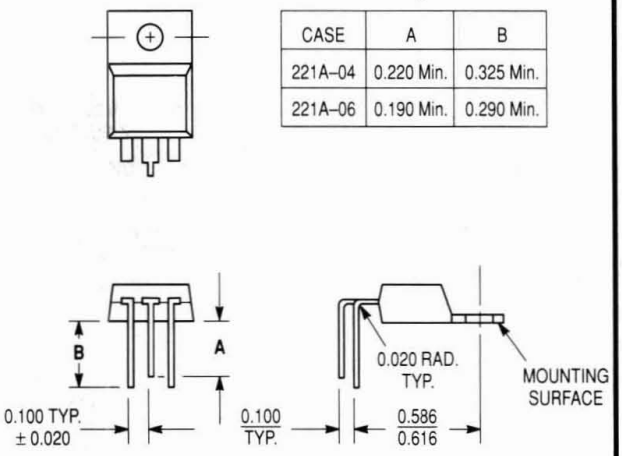

CASE	A	B
221A–04	0.220 Min.	0.325 Min.
221A–06	0.190 Min.	0.290 Min.

LEADFORM BL

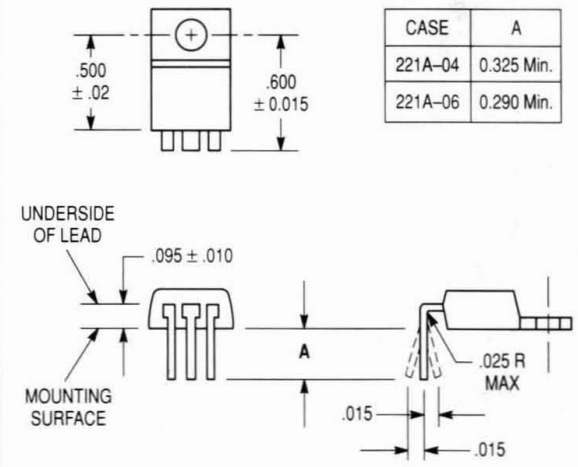

CASE	A
221A–04	0.325 Min.
221A–06	0.290 Min.

LEADFORM AK

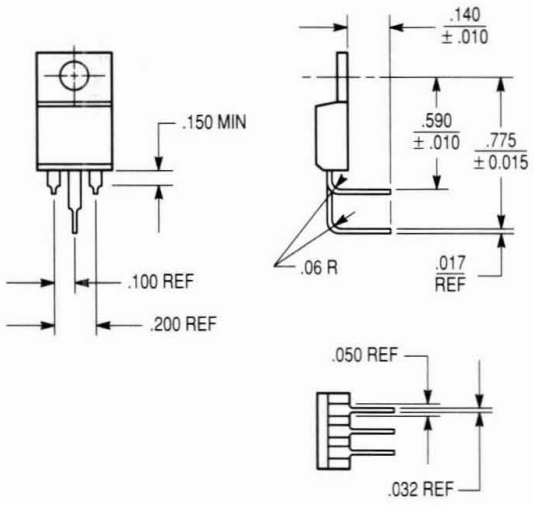

8

TO–220 Leadform Options (continued)

LEADFORM AF

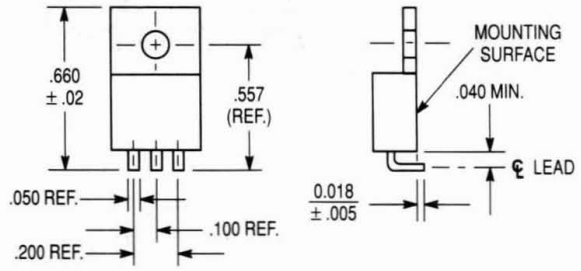

LEADFORM BS

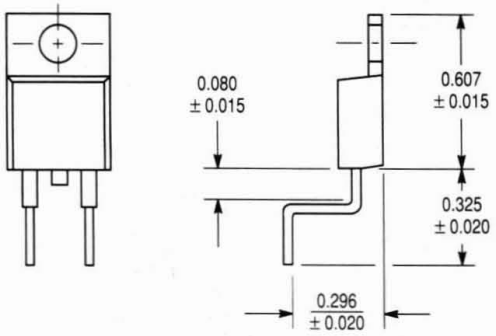

LEADFORM BR

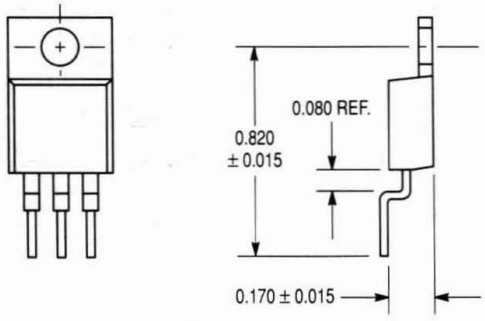

LEADFORM AU

CASE	A
221A–04	0.920 Min.
221A–06	0.885 Min.

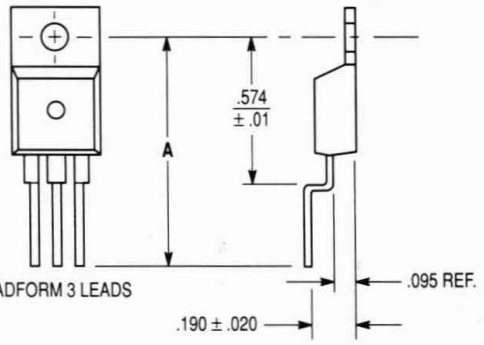

8

TO–220 Leadform Options (continued)

LEADFORM BU

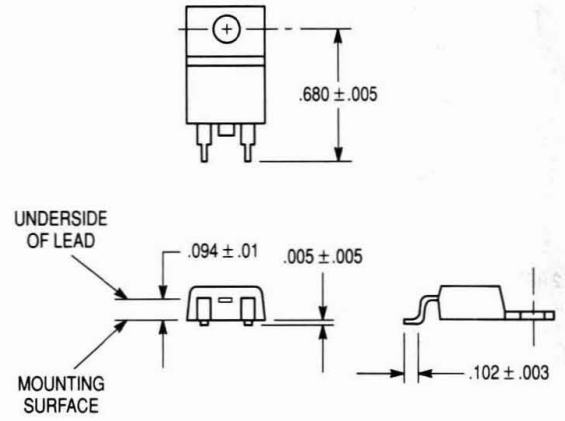

LEADFORM BV

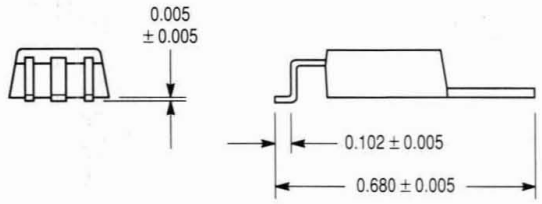

LEADFORM BD

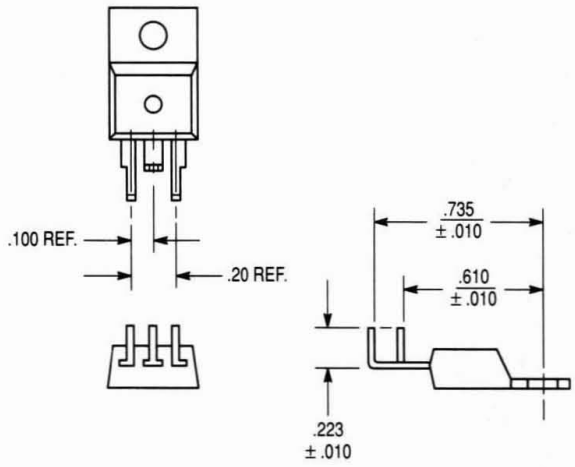

LEADFORM DW



8

TO–220 Leadform Options (continued)

LEADFORM BG

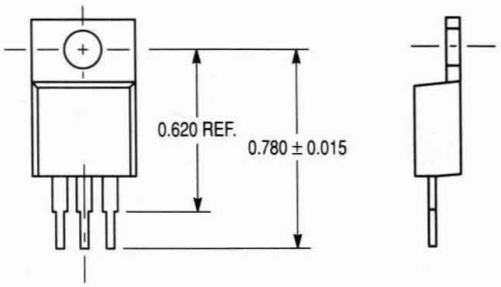

LEADFORM AJ

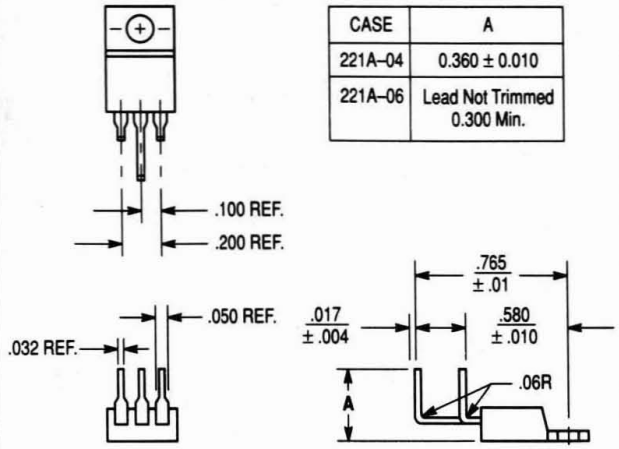

CASE	A
221A–04	0.360 ± 0.010
221A–06	Lead Not Trimmed 0.300 Min.

8

Section 9

Package Outline Dimensions and Footprints

Package Outline Dimensions and Footprints

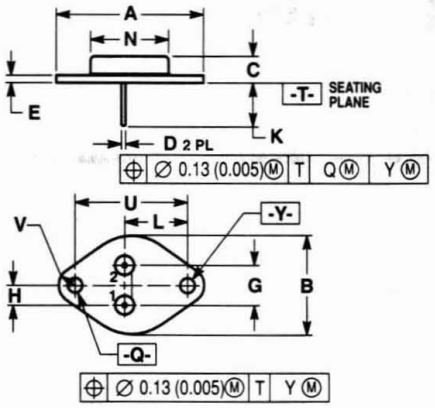

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-204AA OUTLINE SHALL APPLY.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.550 REF		39.37 REF	
B	—	1.050	—	26.67
C	0.250	0.335	6.35	8.51
D	0.038	0.043	0.97	1.09
E	0.055	0.070	1.40	1.77
G	0.430 BSC		10.92 BSC	
H	0.215 BSC		5.46 BSC	
K	0.440	0.480	11.18	12.19
L	0.665 BSC		16.89 BSC	
N	—	0.830	—	21.08
Q	0.151	0.165	3.84	4.19
U	1.187 BSC		30.15 BSC	
V	0.131	0.188	3.33	4.77

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 2:
PIN 1. BASE
2. COLLECTOR
CASE: EMITTER

STYLE 3:
PIN 1. GATE
2. SOURCE
CASE: DRAIN

STYLE 4:
PIN 1. GROUND
2. INPUT
CASE: OUTPUT

STYLE 5:
PIN 1. CATHODE
2. EXTERNAL TRIP/DELAY
CASE: ANODE

STYLE 6:
PIN 1. GATE
2. EMITTER
CASE: COLLECTOR

STYLE 7:
PIN 1. ANODE
2. OPEN
CASE: CATHODE

STYLE 8:
PIN 1. CATHODE #1
2. CATHODE #2
CASE: ANODE

STYLE 9:
PIN 1. ANODE #1
2. ANODE #2
CASE: CATHODE

CASE 1-07
ISSUE Z

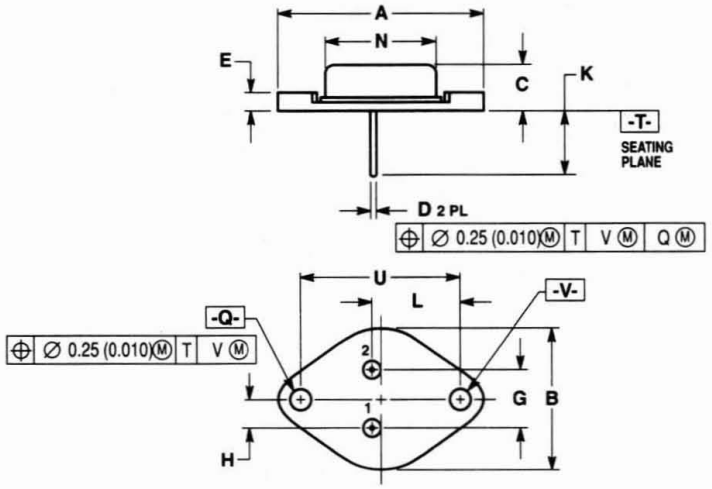

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	—	1.550	—	39.37
B	—	1.050	—	26.67
C	0.250	0.450	6.35	11.43
D	0.039	0.043	0.99	1.09
E	—	0.135	—	3.43
G	0.430 BSC		10.92 BSC	
H	0.215 BSC		5.46 BSC	
K	0.440	0.480	11.18	12.19
L	0.665 BSC		16.89 BSC	
N	—	0.830	—	21.08
Q	0.151	0.161	3.84	4.09
U	1.187 BSC		30.15 BSC	
V	0.151	0.161	3.84	4.09

STYLE 1:
PIN 1. BASE
2. EMITTER
CASE: COLLECTOR

STYLE 2:
PIN 1. EMITTER
2. BASE
CASE: COLLECTOR

STYLE 3:
PIN 1. ANODE
2. CATHODE

STYLE 4:
PIN 1. ANODE #1
2. ANODE #2
CASE: CATHODE

STYLE 5:
1. CATHODE #1
2. CATHODE #2
CASE: ANODE

CASE 11-03
ISSUE G

9

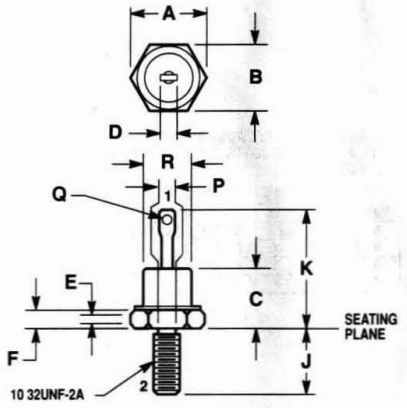

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	—	0.505	—	12.82
B	0.424	0.437	10.77	11.09
C	—	0.405	—	10.28
D	—	0.250	—	6.35
E	0.060	—	1.53	—
F	0.075	0.175	1.91	4.44
J	0.422	0.453	10.72	11.50
K	0.600	0.800	15.24	20.32
P	0.163	0.189	4.14	4.80
Q	0.060	0.095	1.53	2.41
R	0.265	0.424	6.74	10.76

STYLE 1:
TERM. 1. CATHODE
2. ANODE

STYLE 2:
TERM. 1. ANODE
2. CATHODE

STYLE 3:
TERM. 1. ANODE
2. ANODE

CASE 56-03
(DO-4)
ISSUE G

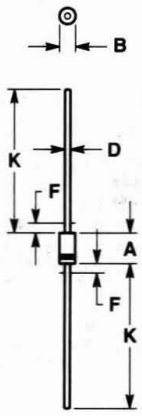

NOTES:
1. POLARITY DENOTED BY CATHODE BAND.
2. LEAD DIAMETER NOT CONTROLLED WITHIN F DIMENSION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	4.07	5.20	0.160	0.205
B	2.04	2.71	0.080	0.107
D	0.71	0.86	0.028	0.034
F	—	1.27	—	0.050
K	27.94	—	1.100	—

CASE 59-03
(DO-41)
ISSUE M

9

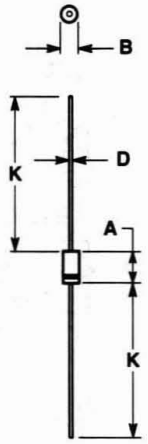

NOTES:
1. POLARITY DENOTED BY CATHODE BAND.
2. LEAD DIAMETER NOT CONTROLLED WITHIN F DIMENSION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	5.97	6.60	0.235	0.260
B	2.79	3.05	0.110	0.120
D	0.76	0.86	0.030	0.034
K	27.94	—	1.100	—

CASE 59-04
(DO-41)
ISSUE M

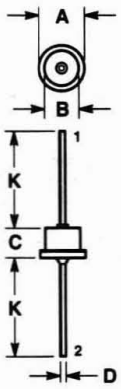

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	—	0.450	—	11.43
B	—	0.350	—	8.89
C	—	0.300	—	7.62
D	0.046	0.056	1.17	1.42
K	0.980	—	24.90	—

STYLE 1:
PIN 1. CATHODE
2. ANODE

STYLE 2:
PIN 1. ANODE
2. CATHODE

CASE 60-01
ISSUE E

9

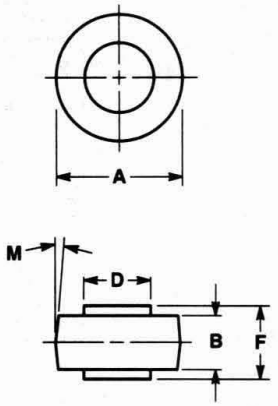

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.43	8.69	0.332	0.342
B	4.19	4.45	0.165	0.175
D	5.54	5.64	0.218	0.222
F	5.94	6.25	0.234	0.246
M	5° NOM		5° NOM	

CASE 193-04
ISSUE J

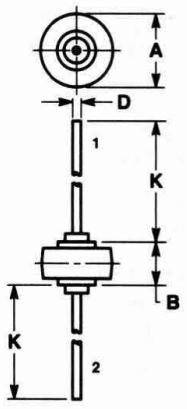

NOTES:
1. CATHODE SYMBOL ON PACKAGE.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.43	8.69	0.332	0.342
B	5.94	6.25	0.234	0.246
D	1.27	1.35	0.050	0.053
K	25.15	25.65	0.990	1.010

STYLE 1:
PIN 1. CATHODE
2. ANODE

CASE 194-04
ISSUE F

9

PACKAGE OUTLINE DIMENSIONS AND FOOTPRINTS (continued)

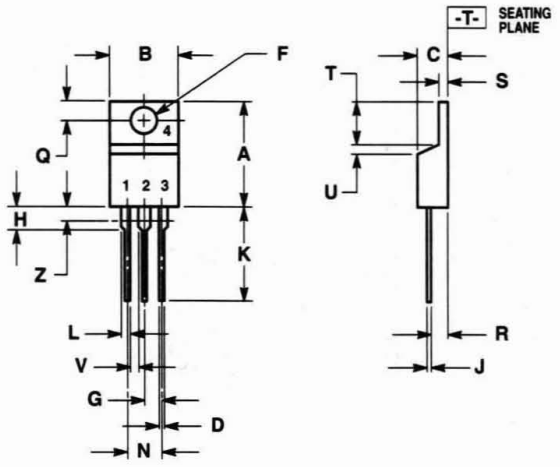

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.570	0.620	14.48	15.75
B	0.380	0.405	9.66	10.28
C	0.160	0.190	4.07	4.82
D	0.025	0.035	0.64	0.88
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.42	2.66
H	0.110	0.155	2.80	3.93
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	—	1.15	—
Z	—	0.080	—	2.04

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

STYLE 2:
PIN 1. BASE
2. EMITTER
3. COLLECTOR
4. EMITTER

STYLE 3:
PIN 1. CATHODE
2. ANODE
3. GATE
4. ANODE

STYLE 4:
PIN 1. MAIN TERMINAL 1
2. MAIN TERMINAL 2
3. GATE
4. MAIN TERMINAL 2

STYLE 5:
PIN 1. GATE
2. DRAIN
3. SOURCE
4. DRAIN

STYLE 6:
PIN 1. ANODE
2. CATHODE
3. ANODE
4. CATHODE

STYLE 7:
PIN 1. CATHODE
2. ANODE
3. CATHODE
4. ANODE

STYLE 8:
PIN 1. CATHODE
2. ANODE
3. EXTERNAL TRIP/DELAY
4. ANODE

STYLE 9:
PIN 1. GATE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

STYLE 10:
PIN 1. GATE
2. SOURCE
3. DRAIN
4. SOURCE

STYLE 11:
PIN 1. DRAIN
2. SOURCE
3. GATE
4. SOURCE

CASE 221A-06
(TO-220AB)
ISSUE Y

9

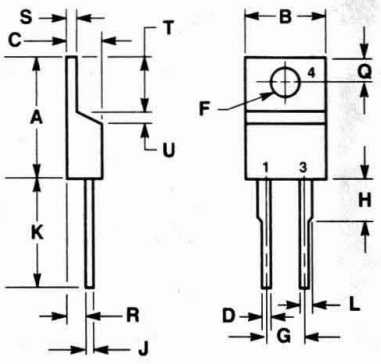

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.595	0.620	15.11	15.75
B	0.380	0.405	9.65	10.29
C	0.160	0.190	4.06	4.82
D	0.025	0.035	0.64	0.89
F	0.142	0.147	3.61	3.73
G	0.190	0.210	4.83	5.33
H	0.110	0.130	2.79	3.30
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.14	1.52
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.14	1.39
T	0.235	0.255	5.97	6.48
U	0.000	0.050	0.00	1.27

STYLE 1:
PIN 1. CATHODE
2. N/A
3. ANODE
4. CATHODE

STYLE 2:
PIN 1. ANODE
2. N/A
3. CATHODE
4. ANODE

CASE 221B-03
ISSUE B

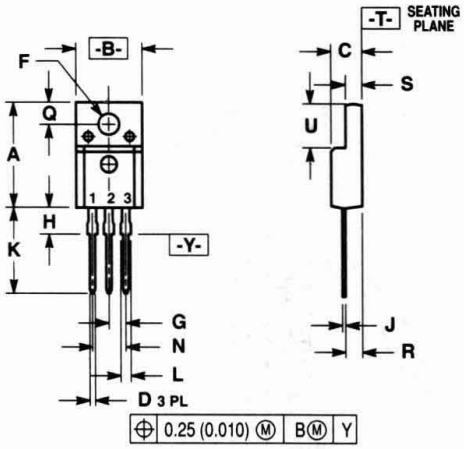

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.621	0.629	15.78	15.97
B	0.394	0.402	10.01	10.21
C	0.181	0.189	4.60	4.80
D	0.026	0.034	0.67	0.86
F	0.121	0.129	3.08	3.27
G	0.100 BSC		2.54 BSC	
H	0.123	0.129	3.13	3.27
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.14	1.52
N	0.200 BSC		5.08 BSC	
Q	0.126	0.134	3.21	3.40
R	0.107	0.111	2.72	2.81
S	0.096	0.104	2.44	2.64
U	0.259	0.267	6.58	6.78

STYLE 1:
PIN 1. GATE
2. DRAIN
3. SOURCE

STYLE 2:
PIN 1. BASE
2. COLLECTOR
3. EMITTER

STYLE 3:
PIN 1. ANODE
2. CATHODE
3. ANODE

STYLE 4:
PIN 1. CATHODE
2. ANODE
3. CATHODE

STYLE 5:
PIN 1. CATHODE
2. ANODE
3. GATE

STYLE 6:
PIN 1. MT 1
2. MT 2
3. GATE

CASE 221D–02
ISSUE D

9

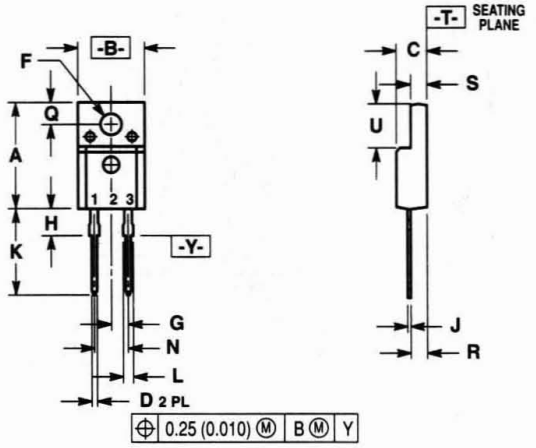

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.621	0.629	15.78	15.97
B	0.394	0.402	10.01	10.21
C	0.181	0.189	4.60	4.80
D	0.026	0.034	0.67	0.86
F	0.121	0.129	3.08	3.27
G	0.100 BSC		2.54 BSC	
H	0.123	0.129	3.13	3.27
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.14	1.52
N	0.200 BSC		5.08 BSC	
Q	0.126	0.134	3.21	3.40
R	0.107	0.111	2.72	2.81
S	0.096	0.104	2.44	2.64
U	0.259	0.267	6.58	6.78

STYLE 1:
PIN 1. CATHODE
2. N/A
3. ANODE

CASE 221E-01
ISSUE O

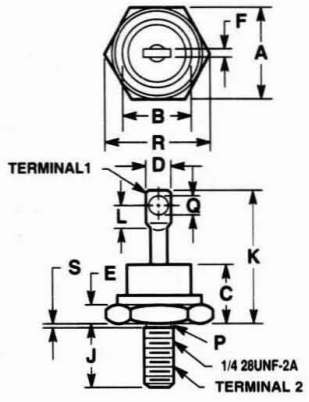

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. DIMENSION P IS A DIAMETER.
3. CHAMFER OR UNDERCUT ON ONE OR BOTH ENDS OF HEXAGONAL BASE IS OPTIONAL.
4. ANGULAR ORIENTATION AND CONTOUR OF TERMINAL ONE IS OPTIONAL.
5. THREADS ARE PLATED.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	16.94	17.45	0.669	0.687
B	—	16.94	—	0.667
C	—	11.43	—	0.450
D	—	9.53	—	0.375
E	2.92	5.08	0.115	0.200
F	—	2.03	—	0.080
J	10.72	11.51	0.422	0.453
K	—	25.40	—	1.000
L	3.86	—	0.156	—
P	5.59	6.32	0.220	0.249
Q	3.56	4.45	0.140	0.175
R	—	20.16	—	0.794
S	—	2.26	—	0.089

STYLE 1:
TERMINAL 1. CATHODE
2. ANODE (CASE)

STYLE 2:
TERMINAL 1. ANODE
2. CATHODE (CASE)

CASE 257-01
ISSUE B

9



NOTES:
1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	—	0.370	—	9.39
B	—	0.250	—	6.35
D	0.048	0.052	1.22	1.32
K	1.000	—	25.40	—

STYLE 1:
PIN 1. CATHODE
2. ANODE

CASE 267-02
ISSUE B

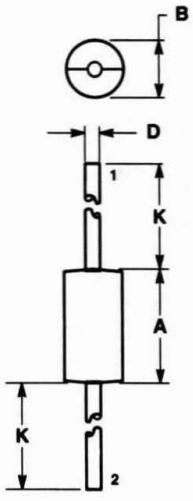

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.370	0.380	9.40	9.65
B	0.190	0.210	4.83	5.33
D	0.048	0.052	1.22	1.32
K	1.000	—	25.40	—

STYLE 1:
PIN 1. CATHODE
2. ANODE

CASE 267-03
ISSUE C

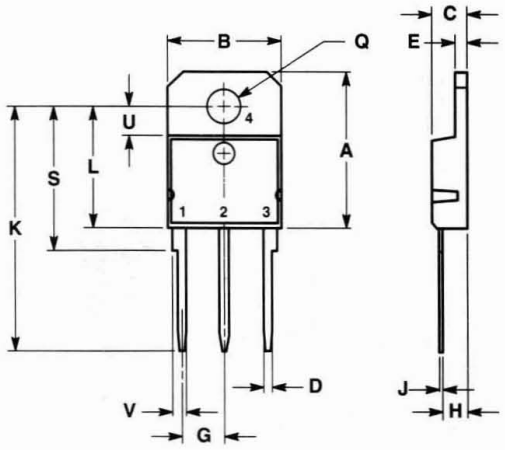

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	19.00	19.60	0.749	0.771
B	14.00	14.50	0.551	0.570
C	4.20	4.70	0.165	0.185
D	1.00	1.30	0.040	0.051
E	1.45	1.65	0.058	0.064
G	5.21	5.72	0.206	0.225
H	2.60	3.00	0.103	0.118
J	0.40	0.60	0.016	0.023
K	28.50	32.00	1.123	1.259
L	14.70	15.30	0.579	0.602
Q	4.00	4.25	0.158	0.167
S	17.50	18.10	0.689	0.712
U	3.40	3.80	0.134	0.149
V	1.50	2.00	0.060	0.078

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

STYLE 2:
PIN 1. ANODE
2. CATHODE
3. ANODE
4. CATHODE

CASE 340D-01
ISSUE A

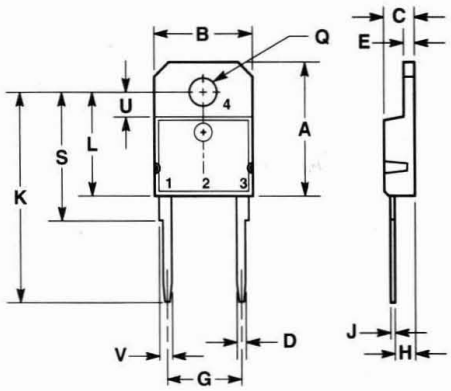

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982
2. CONTROLLING DIMENSION: MILLIMETER.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	19.00	19.60	0.749	0.771
B	14.00	14.50	0.551	0.570
C	4.20	5.00	0.165	0.196
D	1.00	1.30	0.040	0.051
E	1.45	1.65	0.058	0.064
G	10.42	11.44	0.411	0.450
H	2.60	3.00	0.103	0.118
J	0.40	0.60	0.016	0.023
K	28.50	32.00	1.123	1.259
L	14.70	15.30	0.579	0.602
Q	4.00	4.25	0.158	0.167
S	17.50	19.50	0.689	0.767
U	3.40	3.80	0.134	0.149
V	1.50	2.00	0.060	0.078

STYLE 1:
PIN 1. CATHODE
3. ANODE
4. CATHODE

CASE 340E-01
ISSUE O

9

PACKAGE OUTLINE DIMENSIONS AND FOOTPRINTS (continued)

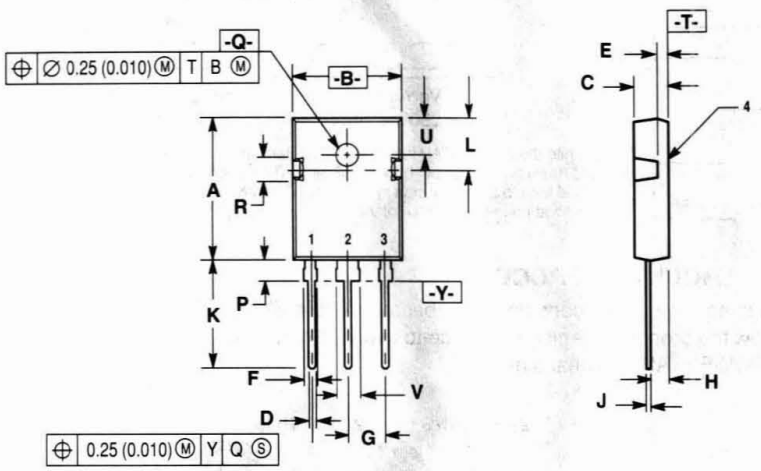

NOTES:
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
5. CONTROLLING DIMENSION: MILLIMETER.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	20.40	20.90	0.803	0.823
B	15.44	15.95	0.608	0.628
C	4.70	5.21	0.185	0.205
D	1.09	1.30	0.043	0.051
E	1.50	1.63	0.059	0.064
F	1.80	2.18	0.071	0.086
G	5.45 BSC		0.215 BSC	
H	2.56	2.87	0.101	0.113
J	0.48	0.68	0.019	0.027
K	15.57	16.08	0.613	0.633
L	7.26	7.50	0.286	0.295
P	3.10	3.38	0.122	0.133
Q	3.50	3.70	0.138	0.145
R	3.30	3.80	0.130	0.150
U	5.30 BSC		0.209 BSC	
V	3.05	3.40	0.120	0.134

STYLE 1:
PIN 1. GATE
2. DRAIN
3. SOURCE
4. DRAIN

STYLE 2:
PIN 1. ANODE 1
2. CATHODE(S)
3. ANODE 2
4. CATHODE(S)

STYLE 3:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

STYLE 4:
PIN 1. GATE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

CASE 340F–03
ISSUE E

9

MAXIMUM MECHANICAL RATINGS

Terminal Penetration:	0.235 max
Terminal Torque:	25–40 in-lb max
Mounting Torque — Outside Holes:	30–40 in-lb max
Mounting Torque — Center Hole:	8–10 in-lb max
Seating Plane Flatness	1 mil per in. (between mounting holes)

POWERTAP MECHANICAL DATA APPLIES OVER OPERATING TEMPERATURE

Vertical Pull 250 lbs max | **2 in. Lever Pull 50 lbs max**

Note: While the POWERTAP is capable of sustaining these vertical and levered tensions, the intimate contact between POWERTAP and heat sink may be lost. This could lead to thermal runaway. The use of very flexible leads is recommended for the anode connections. Use of thermal grease is highly recommended.

MOUNTING PROCEDURE

The POWERTAP package requires special mounting considerations because of the long longitudinal axis of the copper heat sink. It is important to follow the proper tightening sequence to avoid warping the heat sink, which can reduce thermal contact between the POWERTAP and heat sink.

STEP 1:
Locate the POWERTAP on the heat sink and start mounting bolts into the threads by hand (2 or 3 turns).

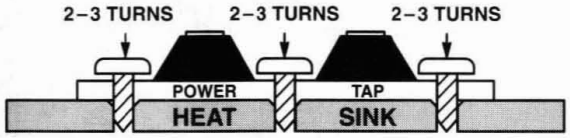

STEP 2:
Finger tighten the center bolt. The bolt may catch on the threads of the heat sink so it is important to make sure the face of the bolt or washer is in contact with the surface of the POWERTAP.

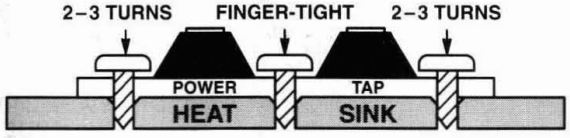

STEP 3:
Tighten each of the end bolts between 5 to 10 in-lb.

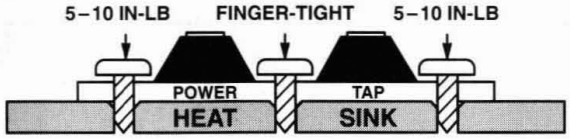

STEP 4:
Tighten the center bolt between 8 to 10 in-lb.

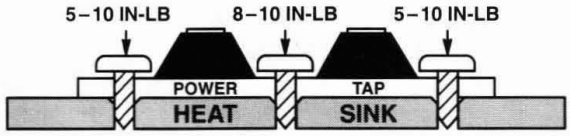

STEP 5:
Finally, tighten the end bolts between 30 to 40 in-lb.

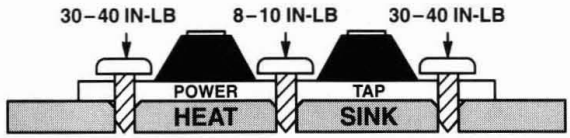

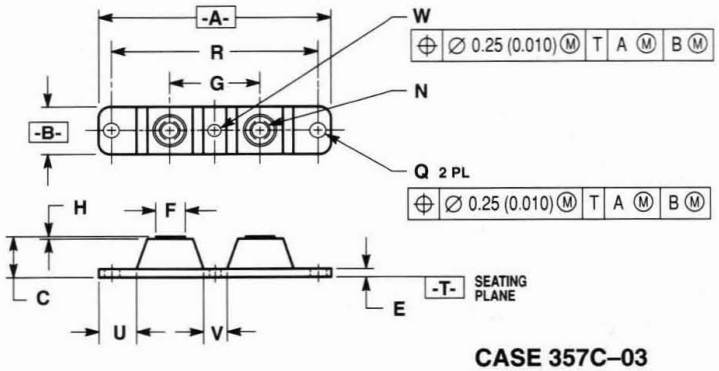

CASE 357C–03
ISSUE C

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. TERMINAL PENETRATION: 5.97 (0.235) MAXIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	3.450	3.635	87.63	92.33
B	0.700	0.810	17.78	20.57
C	0.615	0.640	15.53	16.26
E	0.120	0.130	3.05	3.30
F	0.435	0.445	11.05	11.30
G	1.370	1.380	34.80	35.05
H	0.007	0.030	0.18	0.76
N	1/4–20UNC 2B		1/4–20UNC 2B	
Q	0.270	0.285	6.86	7.32
R	31.50 BSC		80.01 BSC	
U	0.600	0.630	15.24	16.00
V	0.330	0.375	8.39	9.52
W	0.170	0.190	4.32	4.82

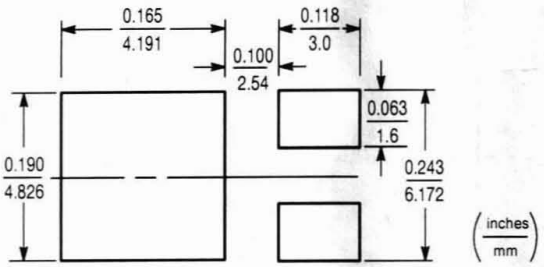

DPAK
FOOTPRINT

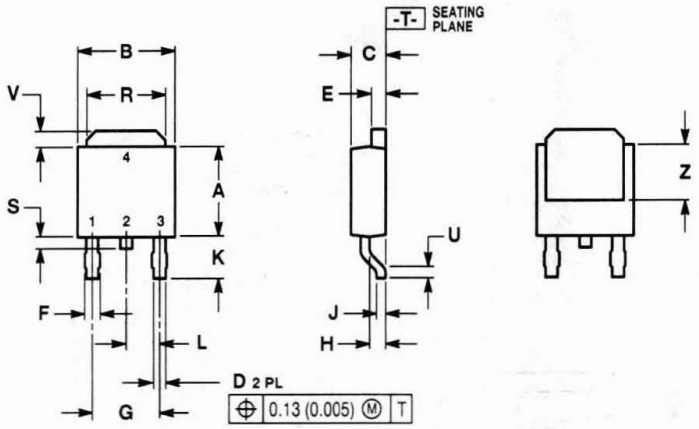

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.235	0.250	5.97	6.35
B	0.250	0.265	6.35	6.73
C	0.086	0.094	2.19	2.38
D	0.027	0.035	0.69	0.88
E	0.033	0.040	0.84	1.01
F	0.037	0.047	0.94	1.19
G	0.180 BSC		4.58 BSC	
H	0.034	0.040	0.87	1.01
J	0.018	0.023	0.46	0.58
K	0.102	0.114	2.60	2.89
L	0.090 BSC		2.29 BSC	
R	0.175	0.215	4.45	5.46
S	0.020	0.050	0.51	1.27
U	0.020	—	0.51	—
V	0.030	0.050	0.77	1.27
Z	0.138	—	3.51	—

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

STYLE 2:
PIN 1. GATE
2. DRAIN
3. SOURCE
4. DRAIN

STYLE 3:
PIN 1. ANODE
2. N/A
3. ANODE
4. CATHODE

STYLE 4:
PIN 1. CATHODE
2. ANODE
3. GATE
4. ANODE

STYLE 5:
PIN 1. GATE
2. ANODE
3. CATHODE
4. ANODE

CASE 369A-13
(DPAK)
ISSUE W

9

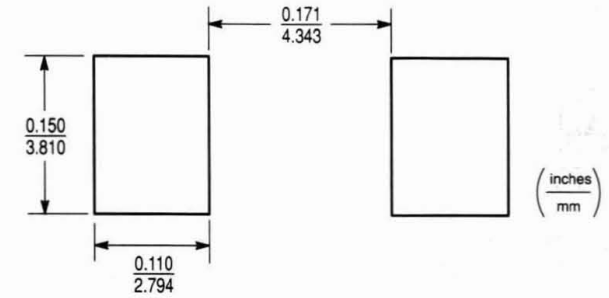

SMC
FOOTPRINT

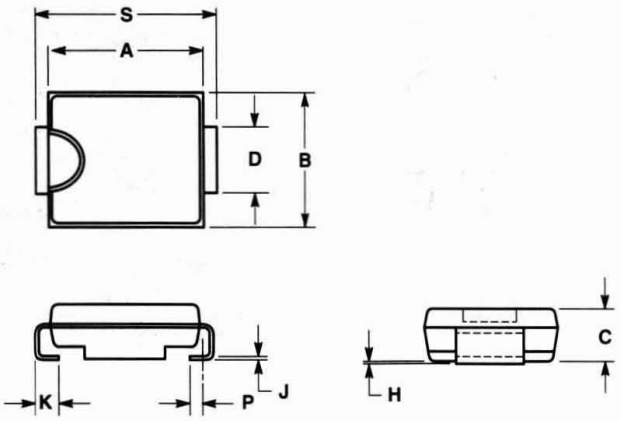

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. D DIMENSION SHALL BE MEASURED WITHIN DIMENSION P.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.260	0.280	6.60	7.11
B	0.220	0.240	5.59	6.10
C	0.075	0.095	1.90	2.41
D	0.115	0.121	2.92	3.07
H	0.0020	0.0060	0.051	0.152
J	0.006	0.012	0.15	0.30
K	0.030	0.050	0.76	1.27
P	0.020 REF		0.51 REF	
S	0.305	0.320	7.75	8.13

CASE 403-03
(SMC)
ISSUE B

9

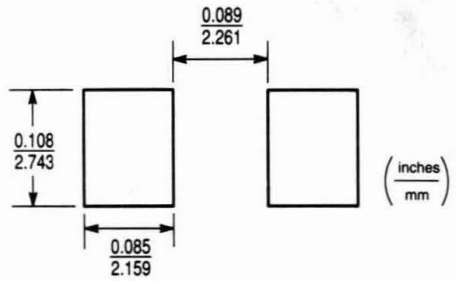

SMB
FOOTPRINT

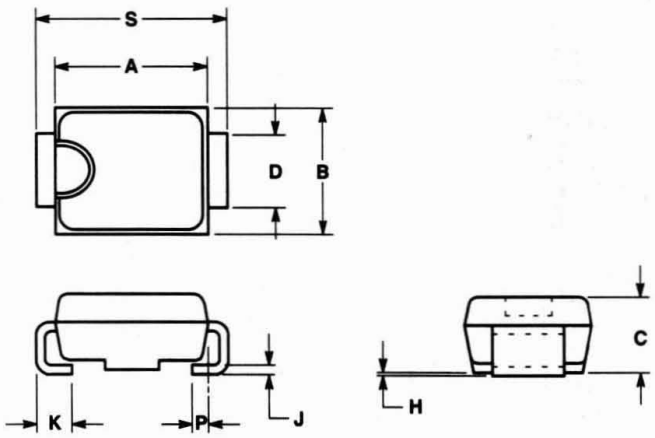

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. D DIMENSION SHALL BE MEASURED WITHIN DIMENSION P.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.160	0.180	4.06	4.57
B	0.130	0.150	3.30	3.81
C	0.075	0.095	1.90	2.41
D	0.077	0.083	1.96	2.11
H	0.0020	0.0060	0.051	0.152
J	0.006	0.012	0.15	0.30
K	0.030	0.050	0.76	1.27
P	0.020 REF		0.51 REF	
S	0.205	0.220	5.21	5.59

CASE 403A-03
(SMB)
ISSUE B

9

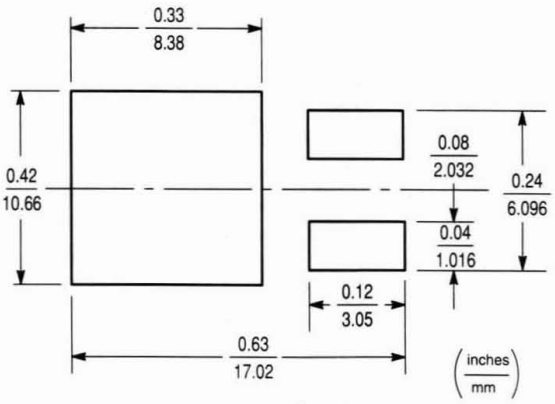

D²PAK
FOOTPRINT

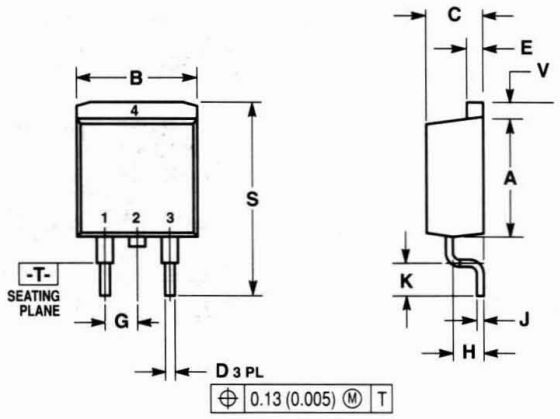

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.340	0.380	8.64	9.65
B	0.380	0.405	9.65	10.29
C	0.160	0.190	4.06	4.83
D	0.020	0.035	0.51	0.89
E	0.045	0.055	1.14	1.40
G	0.100 BSC		2.54 BSC	
H	0.080	0.110	2.03	2.79
J	0.018	0.025	0.46	0.64
K	0.090	0.110	2.29	2.79
S	0.575	0.625	14.60	15.88
V	0.045	0.055	1.14	1.40

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

STYLE 2:
PIN 1. GATE
2. DRAIN
3. SOURCE
4. DRAIN

STYLE 3:
PIN 1. ANODE
2. N/A
3. ANODE
4. CATHODE

CASE 418B-02
D²PAK
ISSUE B

9

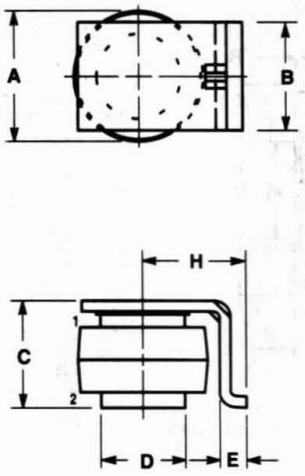

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.330	0.342	8.38	8.69
B	0.270	0.090	6.86	7.37
C	0.275	0.290	6.98	7.37
D	0.218	0.223	5.54	5.66
E	0.060	0.080	1.52	2.03
H	0.255	0.275	6.48	6.98

STYLE 1:
PIN 1. CATHODE
2. ANODE

CASE 421A–01
ISSUE O

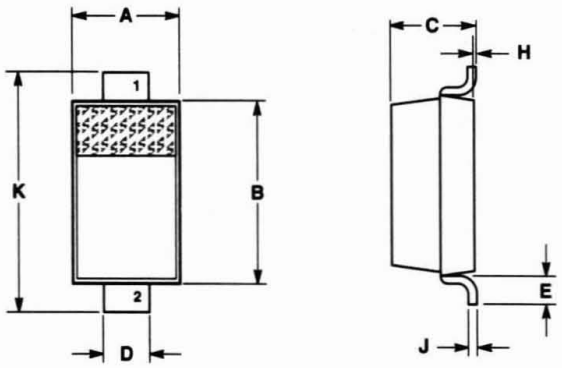

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.055	0.071	1.40	1.80
B	0.100	0.112	2.55	2.85
C	0.037	0.053	0.95	1.35
D	0.020	0.028	0.50	0.70
E	0.010	—	0.25	—
H	0.000	0.004	0.00	0.10
J	—	0.006	—	0.15
K	0.140	0.152	3.55	3.85

STYLE 1:
PIN 1. CATHODE
2. ANODE

CASE 425-04
(SOD–123)
ISSUE C

9

PACKAGE OUTLINE DIMENSIONS AND FOOTPRINTS (continued)

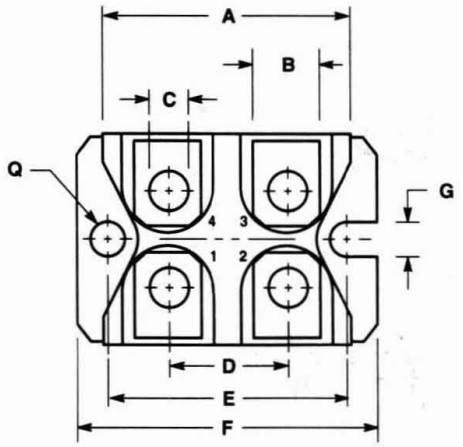

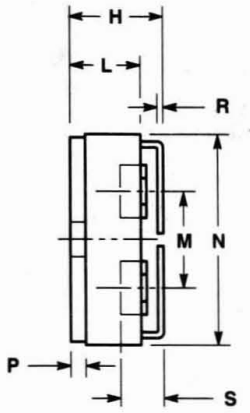

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	31.50	31.70	1.240	1.248
B	7.80	8.20	0.307	0.322
C	4.10	4.30	0.161	0.169
D	14.90	15.10	0.586	0.590
E	30.10	30.30	1.185	1.193
F	38.00	38.20	1.496	1.503
G	4.00	—	0.157	—
H	11.80	12.20	0.464	0.480
L	8.90	9.10	0.350	0.358
M	12.60	12.80	0.496	0.503
N	25.20	25.40	0.992	1.000
P	1.95	2.05	0.076	0.080
Q	4.10	—	0.157	—
R	0.75	0.85	0.030	0.033
S	5.50	—	0.217	—

Recommended screw torque: 1.3 ± 0.2 Nm
Maximum screw torque: 1.5 Nm

STYLE 1:
PIN 3. SOURCE
4. GATE
5. DRAIN
6. SOURCE 2

STYLE 2:
PIN 1. CATHODE 1
2. ANODE 1
3. ANODE 2
4. CATHODE 2

STYLE 3:
PIN 1. CATHODE 1
2. ANODE 2
3. CATHODE 2
4. ANODE 1

SOT-227B

9

Section 10

AR598: Avalanche Capability of Today's Power Semiconductors

10

AVALANCHE CAPABILITY OF TODAY'S POWER SEMICONDUCTORS

R Borras, P Aloisi, D Shumate*
MOTOROLA Semiconductors, France, USA*
Paper published at the EPE Conference '93, Brighton 9/93.

Abstract. Power semiconductors are used to switch high currents in fractions of a second and therefore belong inherently to a world of voltage spikes. To avoid unnecessary breakdown voltage guardbands, new generations of semiconductors are now avalanche rugged and characterized in avalanche energy.

This characterization is often far from application conditions and thus quite useless to the designer. It is easy to verify that an energy rating is not the best approach to a ruggedness quantification because of avalanche energy fluctuations with test conditions.

A physical and thermal analysis of the failure mechanisms leads to a new characterization method generating easy–to–use data for safe designs. The short–term avalanche capability will be discussed with an insight of the different technologies developed to meet these new ruggedness requirements.

Keywords. Avalanche, breakdown, unclamped inductive switching energy, safe operating areas.

INTRODUCTION

One obvious trend for new power electronic designs is to work at very high switching frequencies in order to reduce the volume and weight of all the capacitive and inductive elements. The consequence is that most applications today require switching very high currents in fractions of a microsecond and therefore generate L x dI/dt voltage spikes due to parasitic inductance. Unfortunately these undesirable voltage levels sometimes reach the breakdown voltage of power semiconductors that are not intended to be used in avalanche.

The necessity for avalanche rugged power semiconductors has clearly been perceived by many semiconductor manufacturers who have come up with avalanche–energy rated devices.

This paper will show the limits of an energy–based characterization model. It will concentrate on three different devices: Ultra Fast recovery Rectifiers, Schottky Barrier Rectifiers and MOSFETs. It will study their main failure mechanisms and show the technological improvements that guarantee an enhanced ruggedness.

This will lead to a new characterization that will help the designer choose correctly between overall cost and reliability.

LIMITS OF AN AVALANCHE ENERGY CHARACTERIZATION

Practically all the characterizations are based on the following Unclamped Inductive Switching (UIS) test circuit (fig 1) :

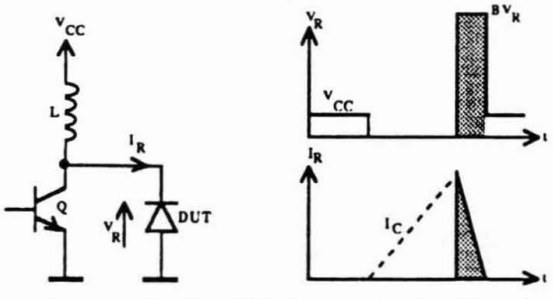

Figure 1. Standard UIS Characterization Circuit.

The energy is first stored in inductor L by turning on transistor Q for a period of time proportional to the peak current desired in the inductor. When Q is turned off, the inductor reverses its voltage and avalanches the Device Under Test until all its energy is transferred. The DUT can be a rectifier or a MOSFET (the gate should always be shorted to the source).

The standard characterization method consists in increasing the peak current in the inductor until the device fails. The energy that the device can sustain without failing becomes a figure of merit of the ruggedness to avalanche :

$$Waval = 1/2\ L\ I_{peak}^2\ BV_{(DUT)} / (BV_{(DUT)} - V_{CC}) \qquad [1]$$

The main limit of this method is that the energy level that causes a failure in the DUT is not a constant but a function of L and Vcc. This results of the fact that the avalanche duration is function of the current decay slope $(BV_{(DUT)}–V_{CC})/L$:

Table 1. Peak Current and Energy Causing Failures in a 1A, 1000V Ultra Fast Recovery Rectifier.

Inductor Value :	10mH	50mH	100mH
Peak Current :	1.7A	0.9A	0.8A
Energy :	14mJ	20mJ	32mJ

Table 1 indicates that the failure is not caused by an energy (i.e. it is not independent of the avalanche duration) but rather by a current level that has to be derated versus time : the devices can sustain a low current for a long period of time (high energy) but at high avalanche currents they will fail after a few microseconds (low energy).

Therefore, unless the designer has a parasitic inductance of value L in his circuit, the standard characterization data will be useless, or worse, it might lead to an overestimate of the ruggedness of his application : because parasitic inductances are often an order of magnitude less than the test circuit inductance, the expected energy capability leads to excessive current levels.

The UIS test circuit is very easy to implement : the only important point is that the transistor has to have a breakdown voltage higher than the DUT. For low breakdown voltage devices, a MOSFET might be preferred to the bipolar transistor.

The advantages of using a MOSFET are multiple : it is a more rugged device, it is much easier to drive and its switching characteristics can be controlled by adding a resistor in series with the gate. It is mandatory to limit this switching speed to avoid having an avalanche energy measurement dependent on the gate drive (i.e. gate resistor and gate to source voltage values).

Anyhow, it is possible to generate very useful information with this UIS test circuit by varying the inductor value. It is also very important to present the data independently of the values of Vcc and L. One solution can be to plot the maximum peak current versus the avalanche duration (fig 2) :

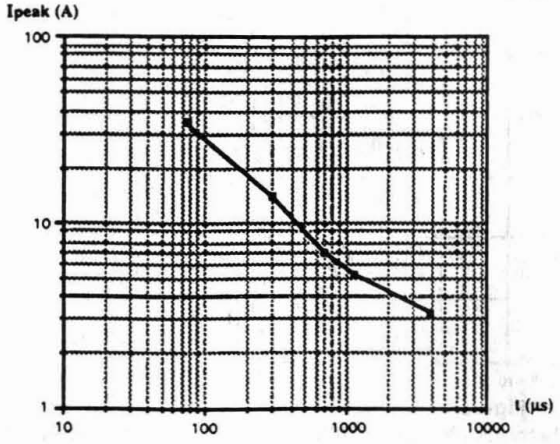

Figure 2. Maximum Peak Current versus Avalanche Duration for a 15A, 60V MOSFET in an UIS Test Circuit.

The advantage of this new graph is that the designer can easily calculate the safety margin of his application and he will not be mislead by an energy value that depends on too many different parameters. If he knows the value of the parasitic inductance in his circuit he will be able to determine its maximum peak current.

For instance, let us assume that the designer uses the 15A, 60V MOSFET characterized in figure 2. This device sustains 500mJ with an inductor of 75mH according to equation [1]. Its typical breakdown voltage is 80V.

If the supply voltage Vdd is 12V and the parasitic inductance L is 250µH, then the avalanche duration and maximum peak current are related by

$$I_{peak} = t\,(BV_{DSS} - V_{DD}) / L \qquad [2]$$

This relationship can be added to figure 2 (see fig 3) :

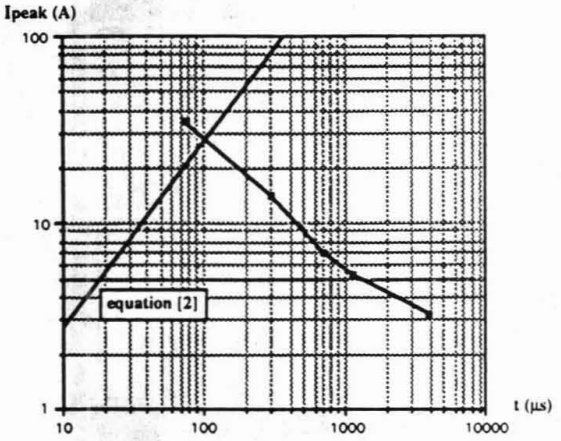

Figure 3. figure 2 + equation [2].

Thus the maximum peak current that can flow through the parasitic inductance L is approximately 28A instead of 58A that would have resulted of using equation [1].

UNDERSTANDING THE FAILURE MECHANISMS

Physical Approach

The following microscope photographs show the failure locations for an Ultra Fast Recovery Rectifier (UFR), a Schottky Barrier Rectifier (SBR) and a MOSFET :

Figure 4. 4A, 1000V UFR Avalanche Failure.

10

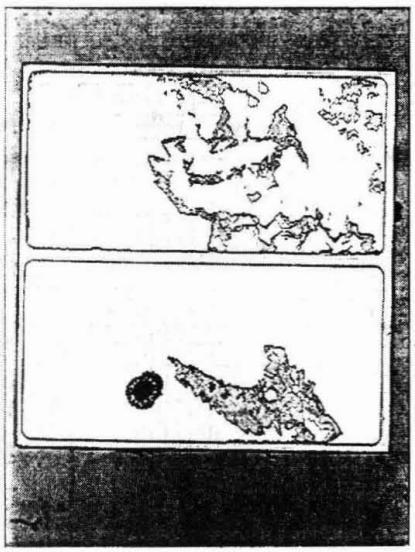

Figure 5. 25A, 35V SBR Avalanche Failure.

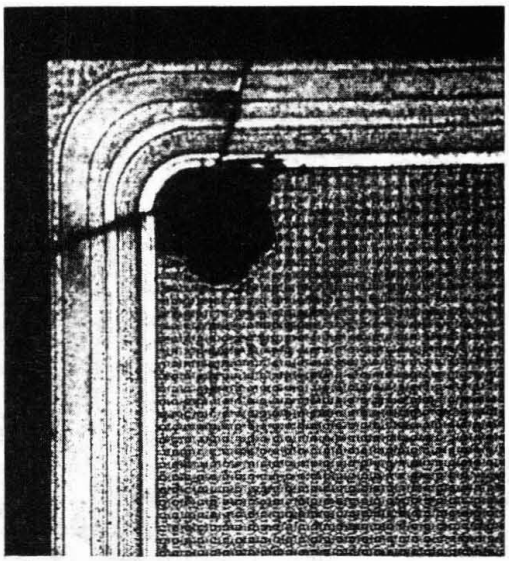

Figure 6. 20A, 500V MOSFET Avalanche Failure.

These photographs show that the failure is generally a punchthrough. The melt–through hole dimensions depend on the current level and avalanche duration.

A close look at the electrical characteristics of failed rectifiers on a curve tracer show three levels of degradation : low stressed diodes have a normal forward characteristic but show an unusual leakage current before entering breakdown as if they had a high–value resistor in parallel : this resistance can be explained by a small punchthrough. For medium degradation levels, the value of this pseudo–resistance decreases and becomes visible in the forward characteristic of the diode. Finally, when the punchthrough reaches considerable dimensions, the device looks very similar to a low value resistor.

The failure does not always appear in the same region of the die. For instance, high voltage UFRs have their punchthrough always located in a corner, MOSFETs often fail in the corners or on the sides whereas SBRs have randomly located failures.

Thermal Approach

Transient thermal response graphs generated by a standard ΔV_{DS} method show the junction temperature evolution for forward and avalanche constant current conduction in a MOSFET. These graphs (fig 7) prove that the silicon efficiency during avalanche and forward currents are similar.

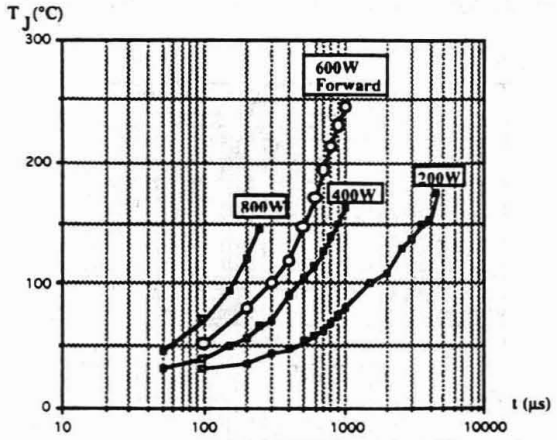

Figure 7. 15A, 60V MOSFET Transient Thermal Response for 800W, 400W, 200W Avalanche and 600W Forward Conduction.

Figure 7 can be used to generate a transient thermal resistance graph by plotting the temperature divided by the power : the four graphs should then normally match. Some slight differences show that the transient thermal resistance increases with the current level : i.e. the 800W curve (10A constant avalanche current) has a higher transient thermal resistance than the 200W (2.5A). Therefore the thermal efficiency in a MOSFET is not perfectly homogeneous versus the avalanche current.

A similar analysis on an UFR or an SBR shows poor thermal efficiency in avalanche. This can be shown by comparing the temperature rise after 1ms for forward and avalanche conduction pulses of same power (400W) :

MOSFET	ΔT_{direct}=160°C	$\Delta T_{avalanche}$=180°C	ratio=0.9
UFR	ΔT_{direct}=120°C	$\Delta T_{avalanche}$=175°C	ratio=0.7
SBR	ΔT_{direct}=100°C	$\Delta T_{avalanche}$=150°C	ratio=0.7

Electrical Approach

Considering the transient thermal responses of a device, it is possible to simulate the instantaneous junction temperature for any sort of power pulse.

10

Conducting this simulation on the data generated by the UIS test it is possible to show that all the parts fail when they reach a "critical temperature" (fig 8) :

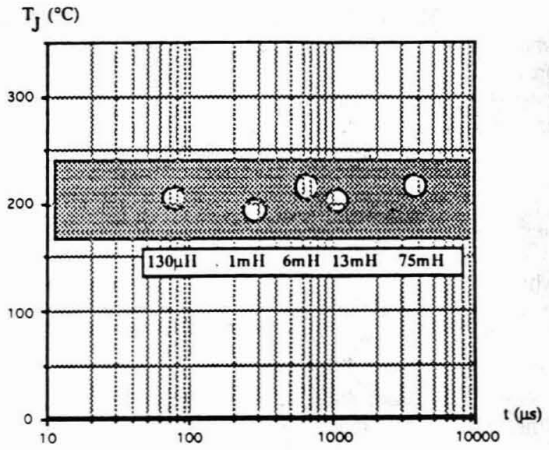

Figure 8. 15A, 60V MOSFET Failure Points and Critical Temperature for different Inductor Values.

At these critical temperatures the intrinsic carrier concentration, ni, reaches levels close to those of the doping concentrations :

ni is proportional to $T^{3/2}\, e^{-Eg/2kT}$ [3]

where T is the absolute temperature, Eg the energy bandgap and k is Boltzmann's constant.

At 200°C, ni exceeds 2 10^{14} cm^{-3} which corresponds to a 1000V material epitaxy concentration level. This means that when the junction temperature reaches 300°C, the rectifier looks more like a resistor than a diode. A local thermal runaway then generates a hot spot and a punchthrough as can be seen in figures 4, 5 and 6.

This failure analysis has shown that the failure mechanism is essentially thermal : the devices are heated by the BV_R x I_R power dissipation. Unfortunately, this power does not remain constant because the UIS circuit generates a linear current decay and also the breakdown voltage varies with the current level and with the junction temperature.

In order to have a complete characterization of the device it is interesting to see how it reacts to a constant avalanche current and different ambient temperatures.

NEW CHARACTERIZATION METHOD PROPOSAL

During the prototype phase, it is easier for the designer to measure the avalanche current and duration than the circuit's parasitic inductance. Therefore, the characterization should be based on easy to measure parameters. The failure analysis proves that the main cause of degradation is the inability to handle an excessive power (avalanche current I_R multiplied by breakdown voltage BV_R). A proper characterization should present the maximum power capability versus time.

As the avalanche voltage varies only slightly with the current level, the proposed method is based on avalanching a device at a constant current and presenting the maximum current capability versus time :

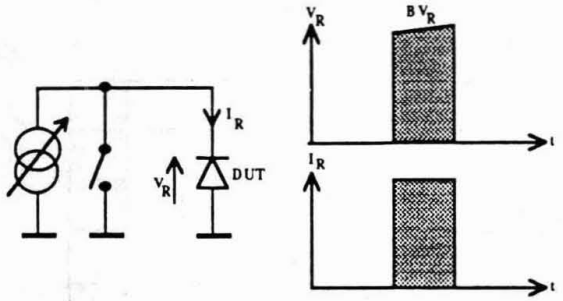

Figure 9. Constant Current Characterization Circuit.

Different test circuits similar to figure 9 have been proposed by Gauen (1) and Pshaenich (2). Some unexpected failures in MOSFETs suggest that the DUT should always be referenced to ground. Unlike UFRs and SBRs, MOSFETs react differently whether they are tied to ground or floating around a fluctuating voltage. Many floating transistors fail at very low stress levels probably due to capacitive coupled currents that turn–on the internal parasitic transistor.

The test circuit shown in figure 9 sets a constant avalanche current through the device until it fails, this duration can then be plotted for different current levels. This generates a graph similar to the UIS method, except that the current is constant instead of decreasing linearly.

This leads to the definition of a "Safe Avalanching Area" (fig 10) that will guarantee a short–term reliability if the device is used within this clearly defined area.

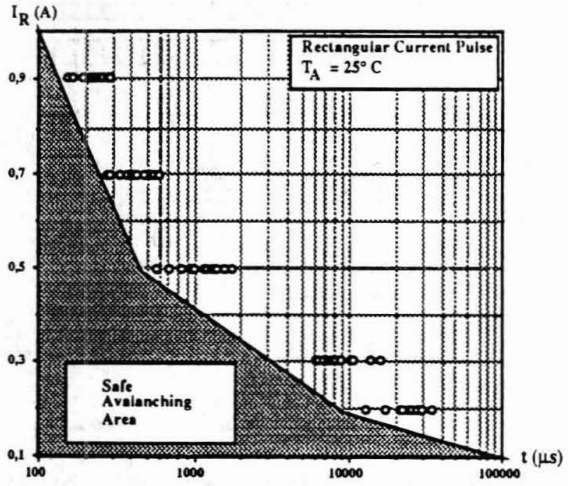

Figure 10. 1A, 30V SBR Save Avalanching Area.

This graph gives the maximum avalanche duration for any value of avalanche current.

The Safe Avalanching Area is generated by taking a safety margin from the failure points. Another approach would be to dynamically measure the temperature as in figure 7 and generate an area defined by a maximum allowable junction temperature.

10

As the failure mechanism is related to a peak junction temperature, it is necessary to give Safe Avalanching Areas for different ambient temperatures (fig 11) :

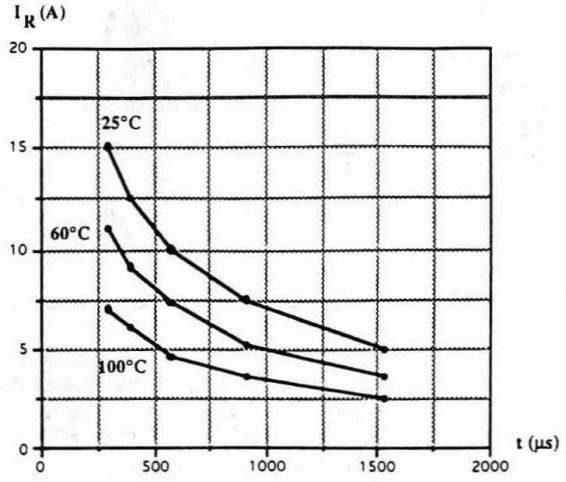

Figure 11. 25A, 35V SBR Safe Avalanching Areas for different ambient temperatures.

When the data in figures 10 and 11 is plotted on log/log axes instead of lin/log or lin/lin, an interesting feature appears (fig 12) :

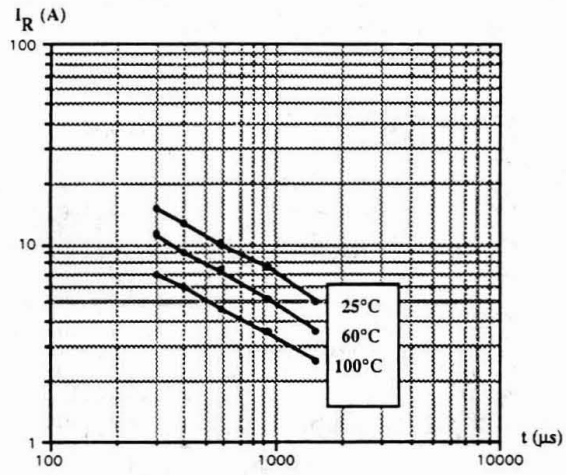

Figure 12. figure 12 on log/log axes.

Figure 12 shows a linear relationship between current and time on a log/log plot. This means that :

$$\text{so} \quad \log(I_R) = A \log(t) + B, \qquad I_R = k\, T^A \qquad [4]$$

where k is a constant function of the die size, the breakdown voltage and other parameters. Constant A can be extracted from figure 12 and similar figures for UFRs and MOSFETs :

$$I_R = k\, T^{-0.55} \qquad [5]$$

Relation [5] is a consequence of heat propagation laws which explain that the temperature in a semiconductor rises proportionally to $t^{0.5}$ (for a constant current pulse and as long as the temperature remains within the silicon die). This can be seen in any transient thermal resistance graph.

A standard thermal calculation shows that :

$$\text{or} \quad T_J = T_A + P_D\, Rth_{JA}(t), \qquad P_D = (T_J - T_A) / Rth_{JA}(t) \qquad [6]$$

where :

T_J, T_A are the junction and ambient temperatures,
P_D is the power dissipation,
$Rth_{JA}(t)$ is the transient thermal resistance.

Given a constant power pulse and for values of t less than 1ms, [6] is equivalent to :

$$\text{so} \quad I_R\, BV_R = (T_J - T_A) / (k\, t^{0.5}), \qquad I_R = k\, t^{-0.5} \qquad [7]$$

This relation is similar to [5]. For avalanche durations of less than 500µs the heat propagates within the silicon only. For longer durations the heat reaches the solder and the package so the propagation characteristics are modified . The devices heat faster or slower and therefore the I_R=f(t) slope changes. Empirical data shows that A in relation [4] remains within –0.5 to –0.6.

Relation [7] can also be expressed by :

$$I_R^2\, t = k \qquad \text{(k:constant)} \qquad [7bis]$$

This rule of thumb works out much better than the, unfortunately too common, 1/2 L I^2 law.

For example, when applied to the example following figure 2 (which is UIS and not Constant Current generated) to determine the maximum peak current in a 250µH inductor and by choosing for instance the 9A,500µs point, relation [7bis] can be written :

$$9A^2\ 500\mu s = Ipeak^2\ 100\mu s$$

This gives a conservative value of 20A instead of a real value of 28A whereas the 1/2 L I^2 method generates a catastrophic 58A value.

TECHNOLOGY TRADEOFFS

Ultra Fast Recovery Rectifiers

The UFR devices are based on a Mesa technology (fig 13) with a Phosphorus doped (n–type) substrate. The heavily doped N+ substrate is followed by a lighter N– epitaxial layer. The P+ is diffused into the epitaxy to form the P–N junction. The passivation follows the perimeter of the die.

10

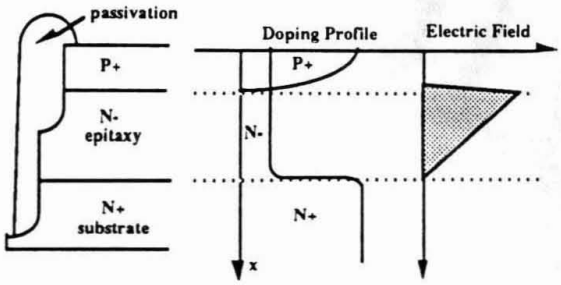

Figure 13. UFR Technology, Profile and Electric Field.

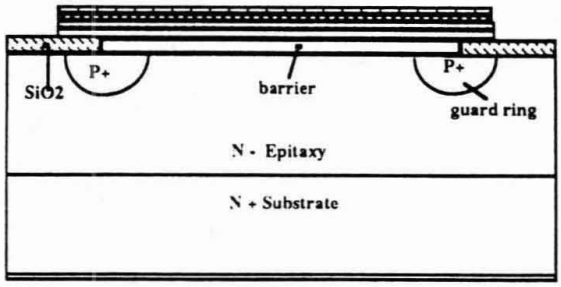

Figure 14. SBR Technology with P–N Guard Rings

The epitaxy characteristics determine the major electrical parameters of the device. A designed experiment was conducted varying the epitaxy thickness and resistivity. The output responses were the forward voltage, the breakdown voltage, the leakage current and the avalanche capability. A wide range of epitaxy materials was chosen to determine the general trends for all the effects.

Although the results were predictable for the static parameters, the avalanche capability results were not.

A key issue is the electric field extension. If it terminates before the substrate the avalanche capability increases by increasing the epitaxy resistivity. If the field extends into the N+ region (reach–through) the avalanche capability is considerably reduced.

The avalanche capability is proportional to the die size and not to the perimeter. This confirms that the avalanche current is vertical and not only a surface or passivation related phenomenon.

The failures always occur in the corners where the electric field is most critical. These failures are essentially function of the thermal characteristics of the device when conducting avalanche currents. Therefore the avalanche capability decreases when the ambient temperature increases and the failures can normally be predicted by Safe Avalanching Areas such as figure 12.

Some unexpected defects though can radically degrade the avalanche capability. Defects in the epi such as pipes cause premature failures but can often be screened by a leakage current test that eliminates soft breakdown devices. Defects in the passivation can generate parasitic oscillations during breakdown.

Schottky Rectifiers

Due to P–N junction guard rings, SBR devices are very similar to UFRs when conducting avalanche currents. These rectifiers have very low breakdown voltages and therefore very thin epitaxy layers. This probably explains that the avalanche–related failures occur anywhere on the die surface : the thin N– region is relatively more heterogeneous with respect to avalanche capability and thermal dissipation than a thick UFR epitaxy.

MOSFETs

MOSFETs can also be compared to UFRs as long as the internal parasitic bipolar transistor (due to the P–tub) does not turn–on. The latest MOSFET generations reduce the P– resistance to avoid biasing this NPN.

While analyzing different constant current test circuits, it appeared that devices used in a floating configuration can have very poor avalanche capabilities.

Due to their cellular technology, MOSFETs conduct very efficiently avalanche currents. They can sustain avalanche power levels close to those of forward conduction ratings.

CONCLUSION

The necessity of characterizing the avalanche capability of power semiconductors has been explained. An analysis of the standard UIS test circuit has shown the limits of a characterization based on energy ratings. Throughout a discussion of the main failure mechanisms, a new thermal approach has been proposed to help designers set safety levels in their designs. This paper sets new standards for characterizing avalanche ruggedness.

Acknowledgements

The authors would like to thank Jean–Michel REYNES, design engineer at MOTOROLA Toulouse, for his help in understanding the failure mechanisms.

References

1. Gauen, K., 1987, "Specifying Power MOSFET Avalanche Stress Capability", Power Technics Magazine, January
2. Pshaenich, A., 1985, "Characterizing Overvoltage Transient Suppressors", Powerconversion International, June/July
3. Cherniak, S., "A Review of Transients and The Means of Suppression", MOTOROLA Application Note AN843
4. Wilhardt, J., "Transient Power Capability of Zener Diodes", MOTOROLA Application Note AN784

10

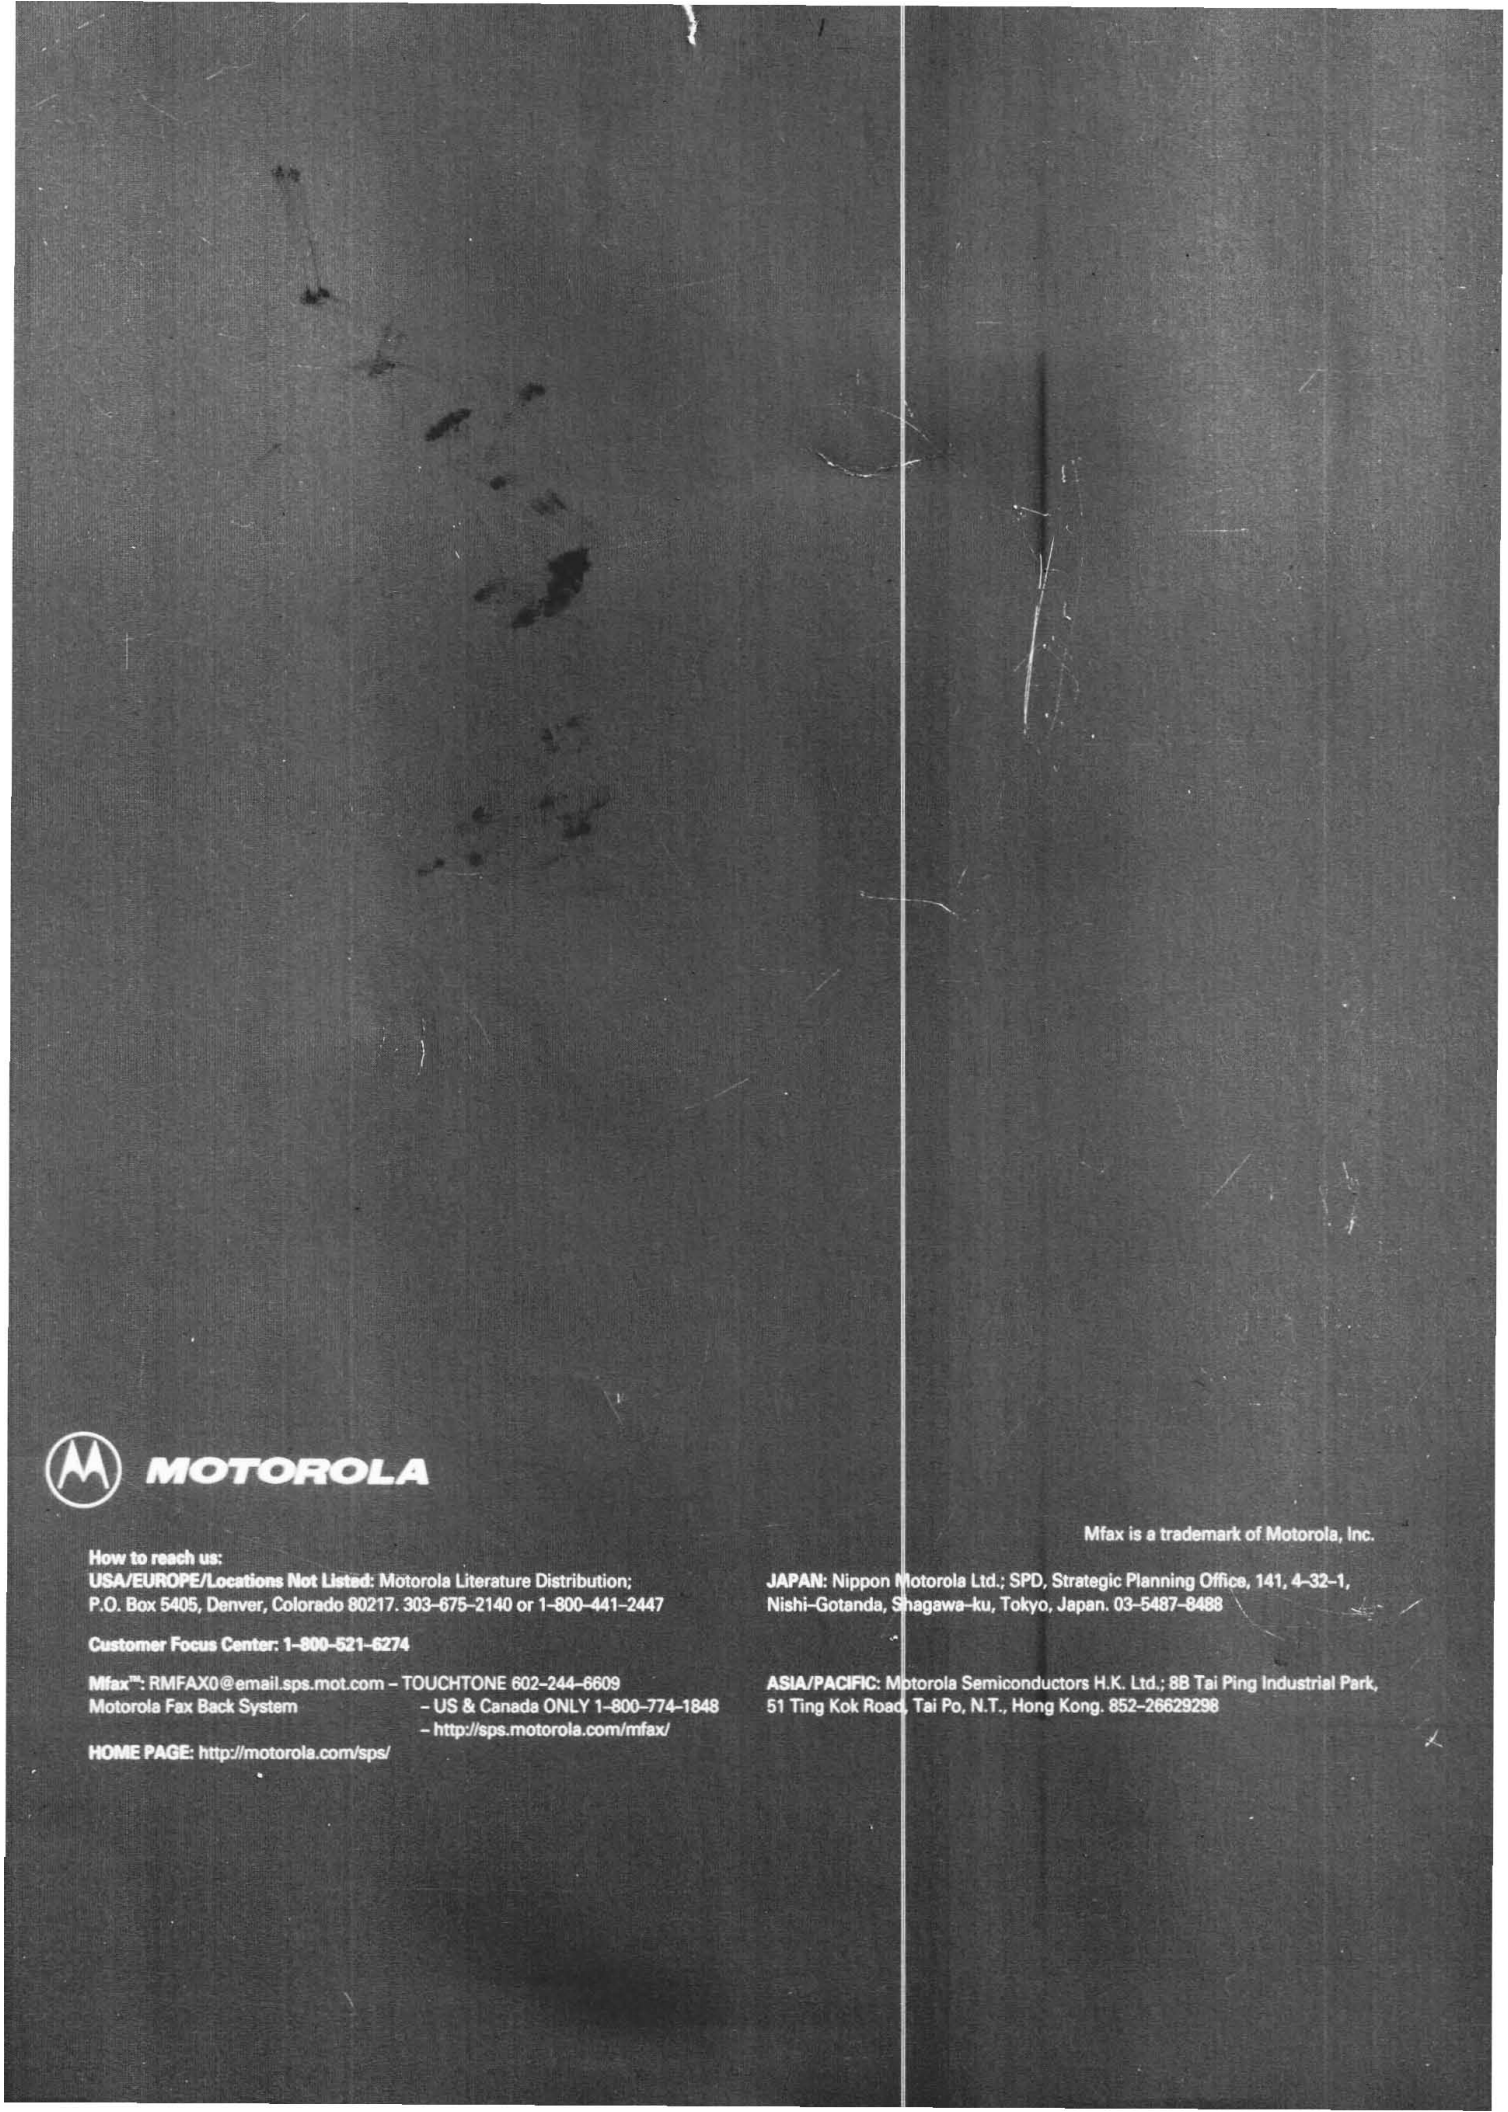

MOTOROLA

Mfax is a trademark of Motorola, Inc.

How to reach us:
USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848
– http://sps.motorola.com/mfax/

HOME PAGE: http://motorola.com/sps/

JAPAN: Nippon Motorola Ltd.; SPD, Strategic Planning Office, 141, 4-32-1, Nishi-Gotanda, Shagawa-ku, Tokyo, Japan. 03-5487-8488

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298